
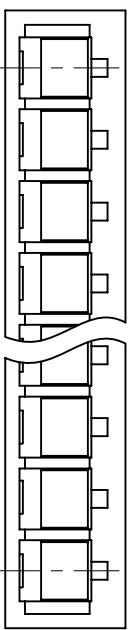
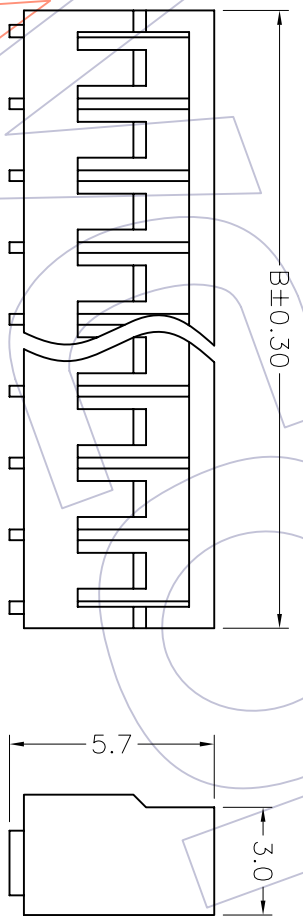


HSF

NOTES:
 Rated Current:2A
 Rated Voltage:250V AC/DC
 Contact Resistance:20mΩ max
 Withstand Voltage:800V AC/Minute
 Insulation Resistance:1000MΩ min
 Operation Temperature:-25°C to+85°C
 Material:PA66 UL94V-0

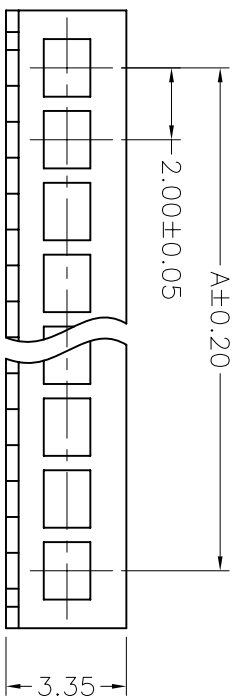

Ordering Information

WF2004 - H **XX** **X** 01

No.of pins
02P~15P

Color
E=Beige
W=White
B=Black
N=Brown

Packing
0=PE Bag

Dimensional & Ordering Information

Circuit	Part No.	Dimension	
		A	B
02	WF2004-H02X01	2.00	5.2
03	WF2004-H03X01	4.00	7.2
04	WF2004-H04X01	6.00	9.2
05	WF2004-H05X01	8.00	11.2
06	WF2004-H06X01	10.00	13.2
07	WF2004-H07X01	12.00	15.2
08	WF2004-H08X01	14.00	17.2
09	WF2004-H09X01	16.00	19.2
10	WF2004-H10X01	18.00	21.2
11	WF2004-H11X01	20.00	23.2
12	WF2004-H12X01	22.00	25.2
13	WF2004-H13X01	24.00	27.2
14	WF2004-H14X01	26.00	29.2
15	WF2004-H15X01	28.00	31.2

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD

PART NO. SBE TAB
 TITLE: 2.00 HOUSING

OPERATION	DRAW	WEIXD	08/06/30
X.X	DESIGN		
X.XX	CHECK		
X.XXX	APPROVE		
Angle			
± 3'			

SCALE	1:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE
A0	08/06/30	NEW			