

# HSF

**NOTES:**


Rated Current:2.0A  
 Rated Voltage:250V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:800V AC/Minute  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-25℃ to+85℃

Burr:0.1mm Max. On Contacta Area  
 Camber:0.1mm Max. Damage:NA.  
 Deformation:0.05mm Max

Contact Plating:  
 G0=Gold Flash  
 G1=3μ"Gold  
 G2=5μ"Gold  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S1=3μ"Gold/Tin  
 S2=5μ"Gold/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin

## Ordering Information

WF2004 - TP **XX 01**

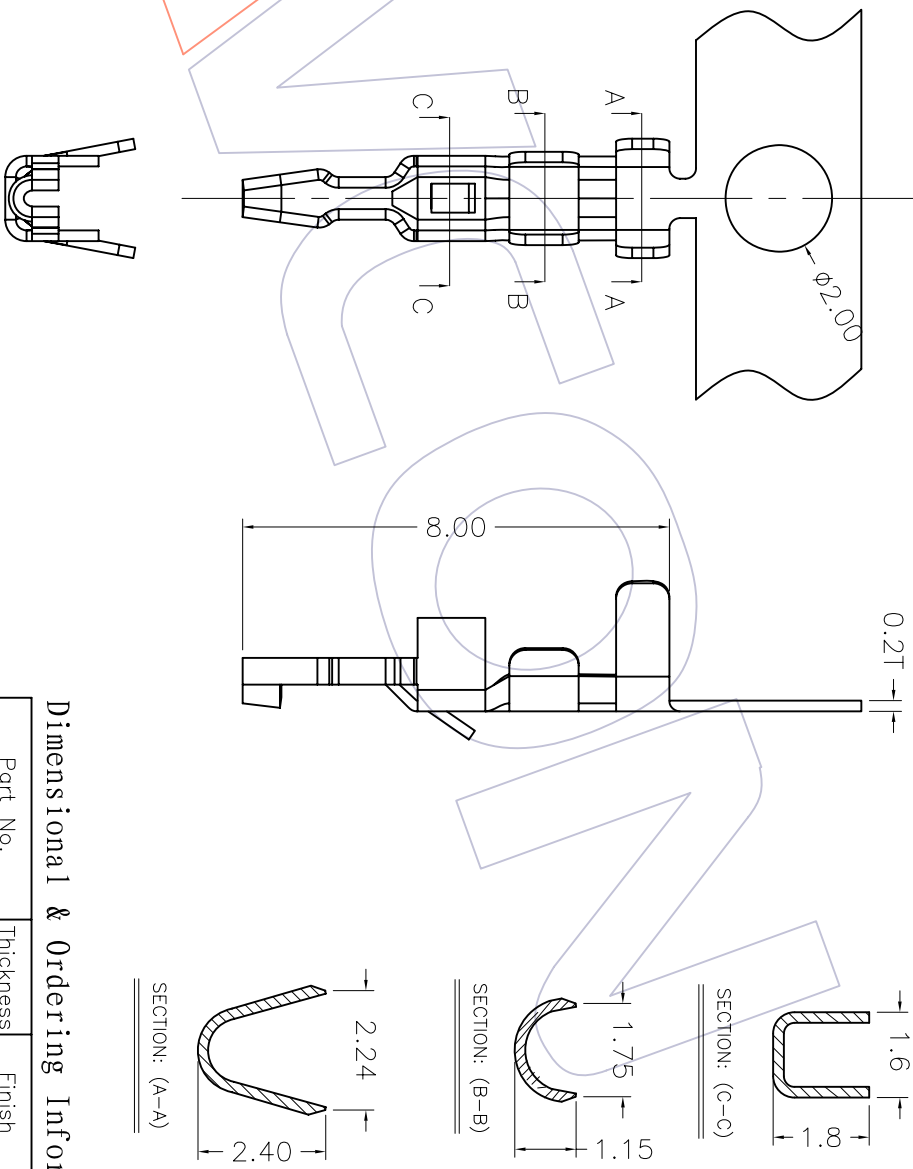

## Dimensional & Ordering Information

Part No.	Thickness	Finish	Material
WF2004-TPSN01	0.20	Tin-Plated	Phosphor bronze
WF2004-TPG001	0.20	Gold-Plated	Phosphor bronze

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO. LTD

OPERATION	DRAW	WEIXD	SCALE	PART NO.
X.X	DESIGN	08/08/04	1:1	
X.XX	CHECK		mm	
X.XXX	CHECK		A4	
Angle	APPROVE		1/1	TITLE:
DIM			PROJ.	Customer NO.
± .3'				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/07/04	NEW		