
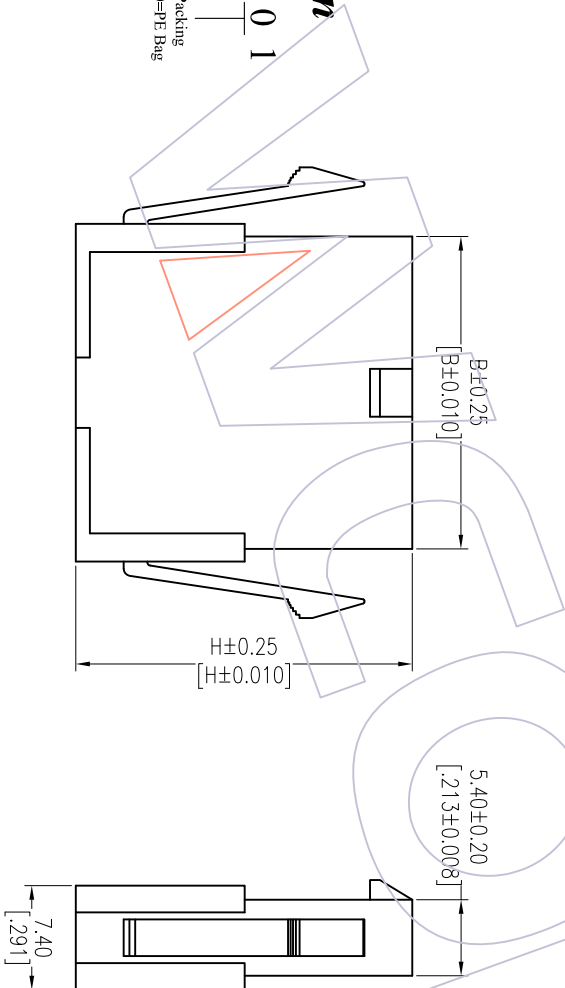


# HSP

**NOTES:**


Rated Current:9.0A AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:1500V AC/Minute  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-25℃ to+85℃  
 Insulator Material:PA66 UL94V-0  
 Used with : WF4202-MT(Male Contact)

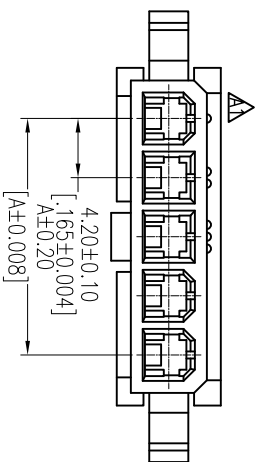

## Ordering Information

WF4202-1HK XX W 0 1

No.of pins Color Packing  
 02P-05P W=White 0=PE Bag

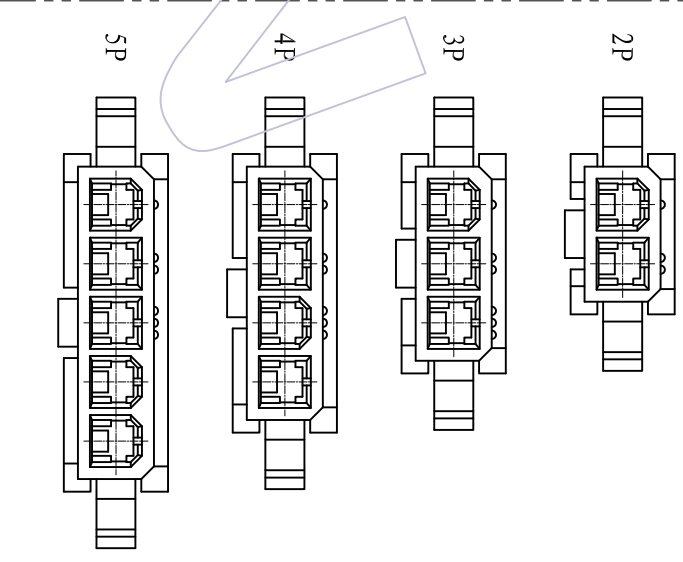

### Specification & Ordering Information:

Circuit	Part No.	Dimension		
		A	B	H
02	WF4202-1HK02W01	4.20	9.60	23.90
03	WF4202-1HK03W01	8.40	13.80	24.00
04	WF4202-1HK04W01	12.60	18.00	23.90
05	WF4202-1HK05W01	16.80	22.20	23.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2015/06/25	Modify	
A0	2012/09/17	NEW	

OPERATION		DRAW		DATE		SCALE		FIT	
XX	±0.40	JYHuang		2015/06/25		mm		1/1	
XXX	±0.25	CHECK				A4			
XXXX	±0.15	APPROVE				SHEET			
Angle	± 3'	PROJ.							

PART NO. SEE TAB  
 TITLE: 4.20mm Mini Fit Housing Single Row , 弹片式卡钩  
 Customer NO.

# WCON

WCON-Dongguan Http: www.wcon.com  
 WCON-Kunshan  
 Tel: +86 769 85358920 Tel: +86 512 57468408  
 Fax: +86 769 85358915 Fax: +86 512 57468468  
 E-mail: sales@wcon.com E-mail: sales@wcon.com