HSF

NOTES:
Current Rating:7.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−25℃ to+85℃
Material:Nylon(UL94V−0)

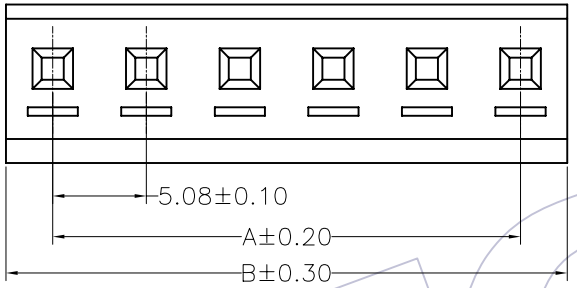

Ordering Information

WF5081-H XX W 0 1

- No.of Pins: 02P-25P
- Color: W= White, B= Black, U= Blue, E= Beige
- Packing: 0=PE Bag

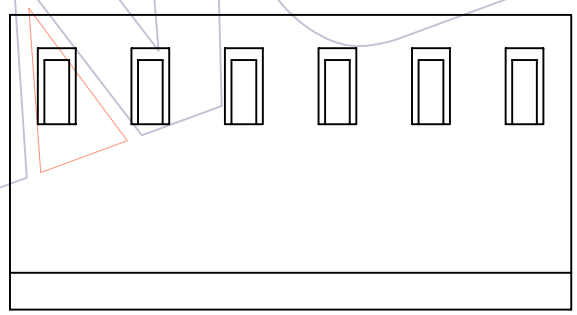

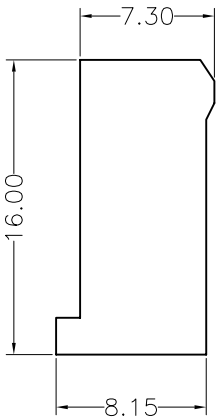

Dimensional & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	WF5081−H02W01	5.08	10.16
03	WF5081−H03W01	10.16	15.24
04	WF5081−H04W01	15.24	20.32
05	WF5081−H05W01	20.32	25.40
06	WF5081−H06W01	25.40	30.48
07	WF5081−H07W01	30.48	35.56
08	WF5081−H08W01	35.56	40.64
09	WF5081−H09W01	40.64	45.72
10	WF5081−H10W01	45.72	50.80
11	WF5081−H11W01	50.80	55.88
12	WF5081−H12W01	55.88	60.96
13	WF5081−H13W01	60.96	66.04
14	WF5081−H14W01	66.04	71.12
15	WF5081−H15W01	71.12	76.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/07/23	NEW	———	———

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	WEIXD	08/07/23
DESIGN		
CHECK		
APPROVE		

SCALE	3:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	SEE TAB
TITLE:	5.08 HOUSING
Customer NO.	

WCON