

HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: Ø0.41mm

Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information





3515-192 XX R XX 103 X 1

No. of Pin
2-50PIN

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold

Packing
A=Tray
T=Tube

Item	Pitch	Mating
Standard	1.27X2.54	3525
Alternate		

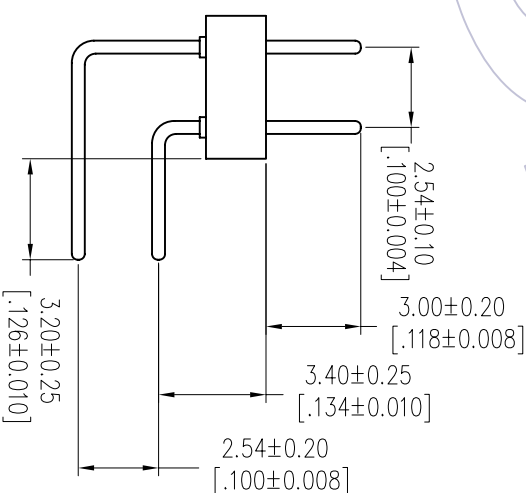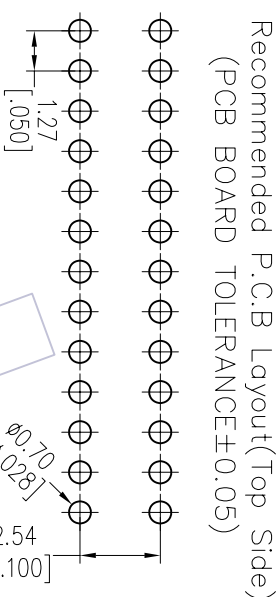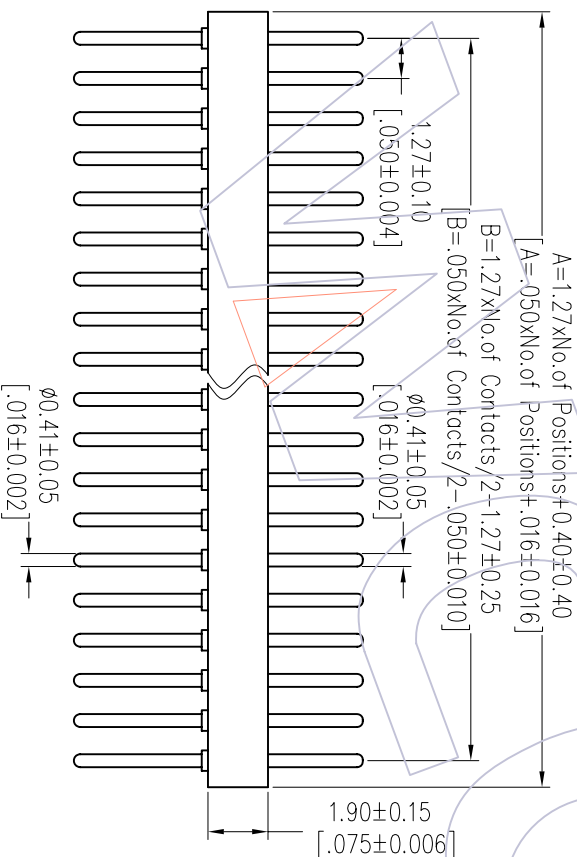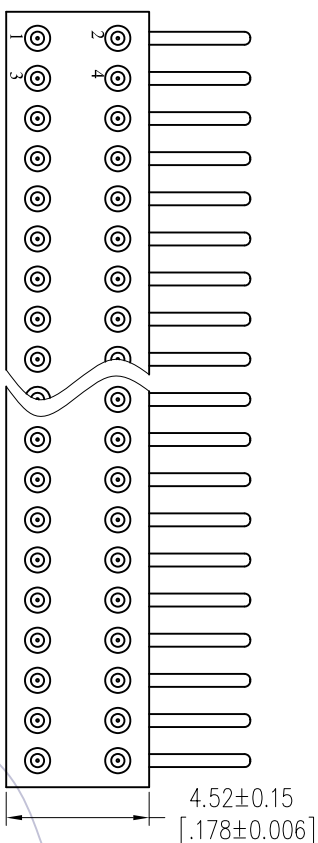

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.				
XX	JYHuang	2012/10/22	UNIT	mm	3515-192XXRX103X1				
XX	CHECK	DATE	SIZE	A4	TITLE:				
X.XXX	Angle	$\pm 3^\circ$	SHEET	1/1	1.27x2.54mm MACHINED PIN HEADER DUAL ROW 90° H=1.90 L=10.3				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	Customer NO.
A0	2012/10/22	NEW	---	---	---				

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com