

HSF

TECHNICAL SPECS:




Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: $\phi 0.41$ mm
 Insulator Material: PPS+30%G.F(UL94V-0)

Ordering Information

3515-192 XX S XX 081 X 1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=1.0u"Gold, G4=1.5u"Gold, G5=3.0u"Gold
 Packing: A=Tray, T=Tube

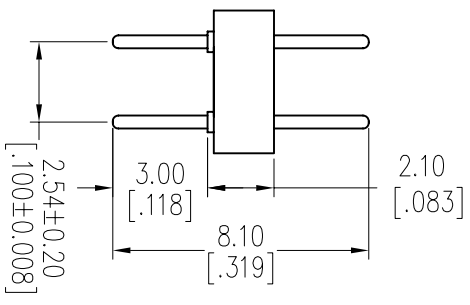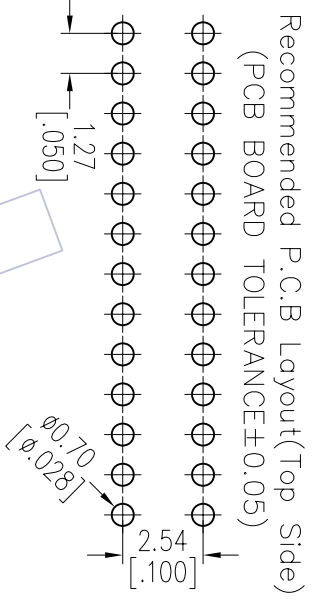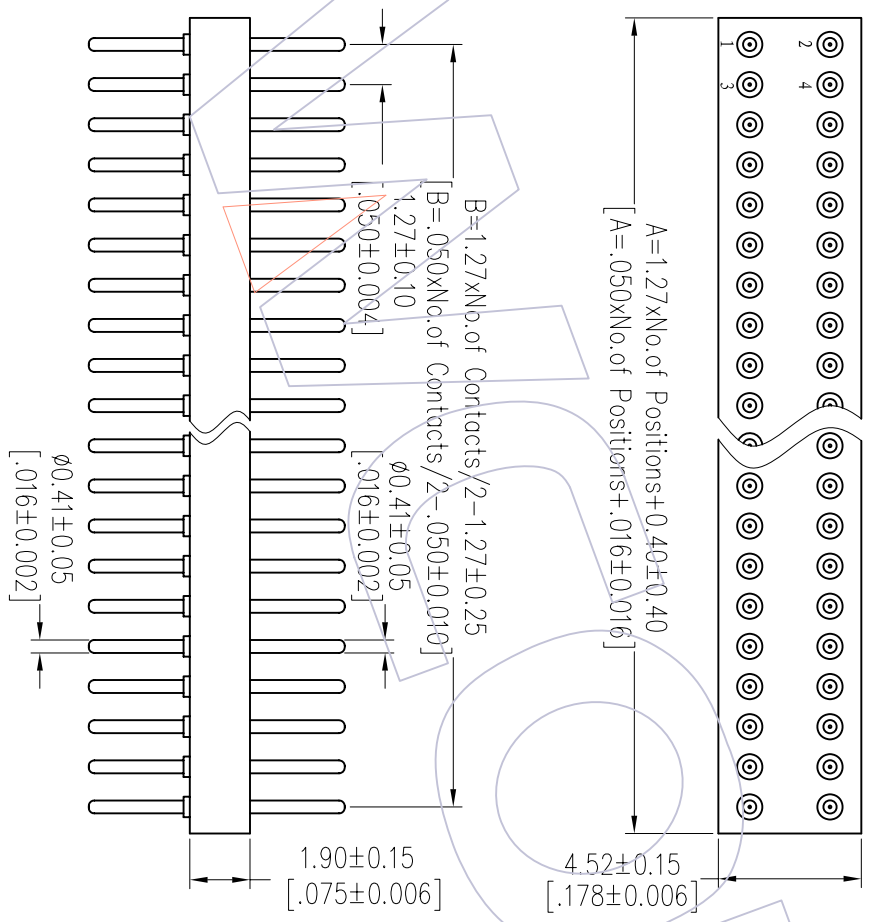

Item	Pitch	Mating
Standard	1.27X2.54	3525
Alternate		

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuang		2012/10/22		mm				3515-192XXSX081X1	
CHECK		DATE		TITLE:		SHEET		PROJ.		Customer NO.	
X.XXX	±0.15	X.XXX	±0.15	Angle	± 3°	A4	1/1			1.27x2.54mm MACHINED PIN HEADER DUAL ROW 180° H=1.90 L=8.1	
APPROVE		DATE		Customer NO.		WCON-Dongguan		WCON-Kunshan		Http: www.wcon.com	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIW	TOL	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com		WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com		

WCON