

HSF

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 500Vrms
 Mechanical Life: Min 500 cycles
 Mating Pin: $\phi 0.38$ to $\phi 0.50$ mm
 Forces: (polished steel gauge $\phi 0.41$ mm)
 Insertion: 250g Max/Pin, Withdrawal: 25g Min/Pin
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000), Sn over Ni
 Contact Clip(6 finger): BeCu(C17200), Au or Sn over Ni
 Insulator Material: PPS+30%GF(UL94V-0)


Ordering Information

3524-383 XX M XX 060 X 1

No. of Pin
 2-50PIN

Contact Plating
 SPl=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tim

Packing
 T=Tube
 A=Tray
 R=Tape&Reel

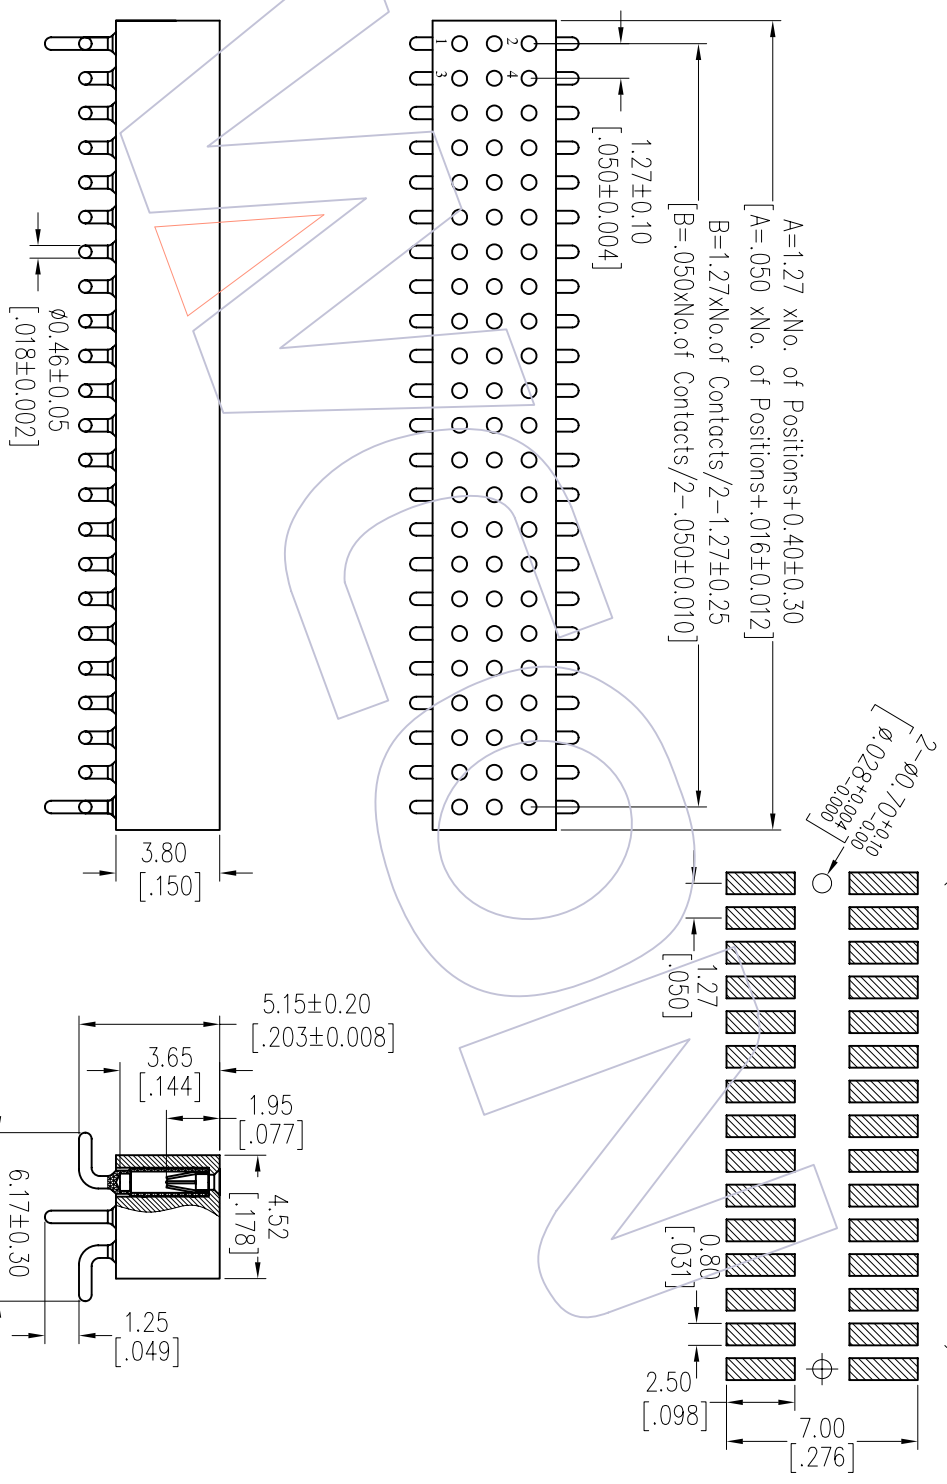

Item	Pitch	Mating
Standard	1.27	3514
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A0	2012/10/16	NEW		XX	JYHuang	2012/10/16	mm	A4	3524-383XXXXX060X1	1.27mm MACHINED FEMALE HEADBR THREE ROW 180° SMT H=3.80		Tel: +86 769 85358920	Tel: +86 512 57468408
				X.XX	CHECK	DATE	SIZE	SHEET				Fax: +86 769 85358915	Fax: +86 512 57468468
				X.XXX	± 0.15	APPROVE	PROJ.					E-mail: sales@wcon.com	E-mail: sales@wcon.com
				Angle	± 3°	DATE							
				DIM	TOL								

WCON

Http: www.wcon.com