

HSF


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 3.0AMP
 Voltage Rating: 250V
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

Ordering Information

2136T - 2 XX M XX CUN X X

- No. of Pins per ROW: 42-40PIN
- Contact Plating: Gold Flash
- CF=10g"Gold
- CF=5g"Gold
- CF=30g"Gold
- SP=Gold Flash/Tin
- SP=10g"Gold/Tin
- SP=15g"Gold/Tin
- SS=Sn"Gold/Tin
- SN=1"Sn
- SW=White Tin
- Packing: 1-Tube
- P-Tube-CAP
- Re-aped Steel CAP
- Series No: 1-Type1
- 2-Type2

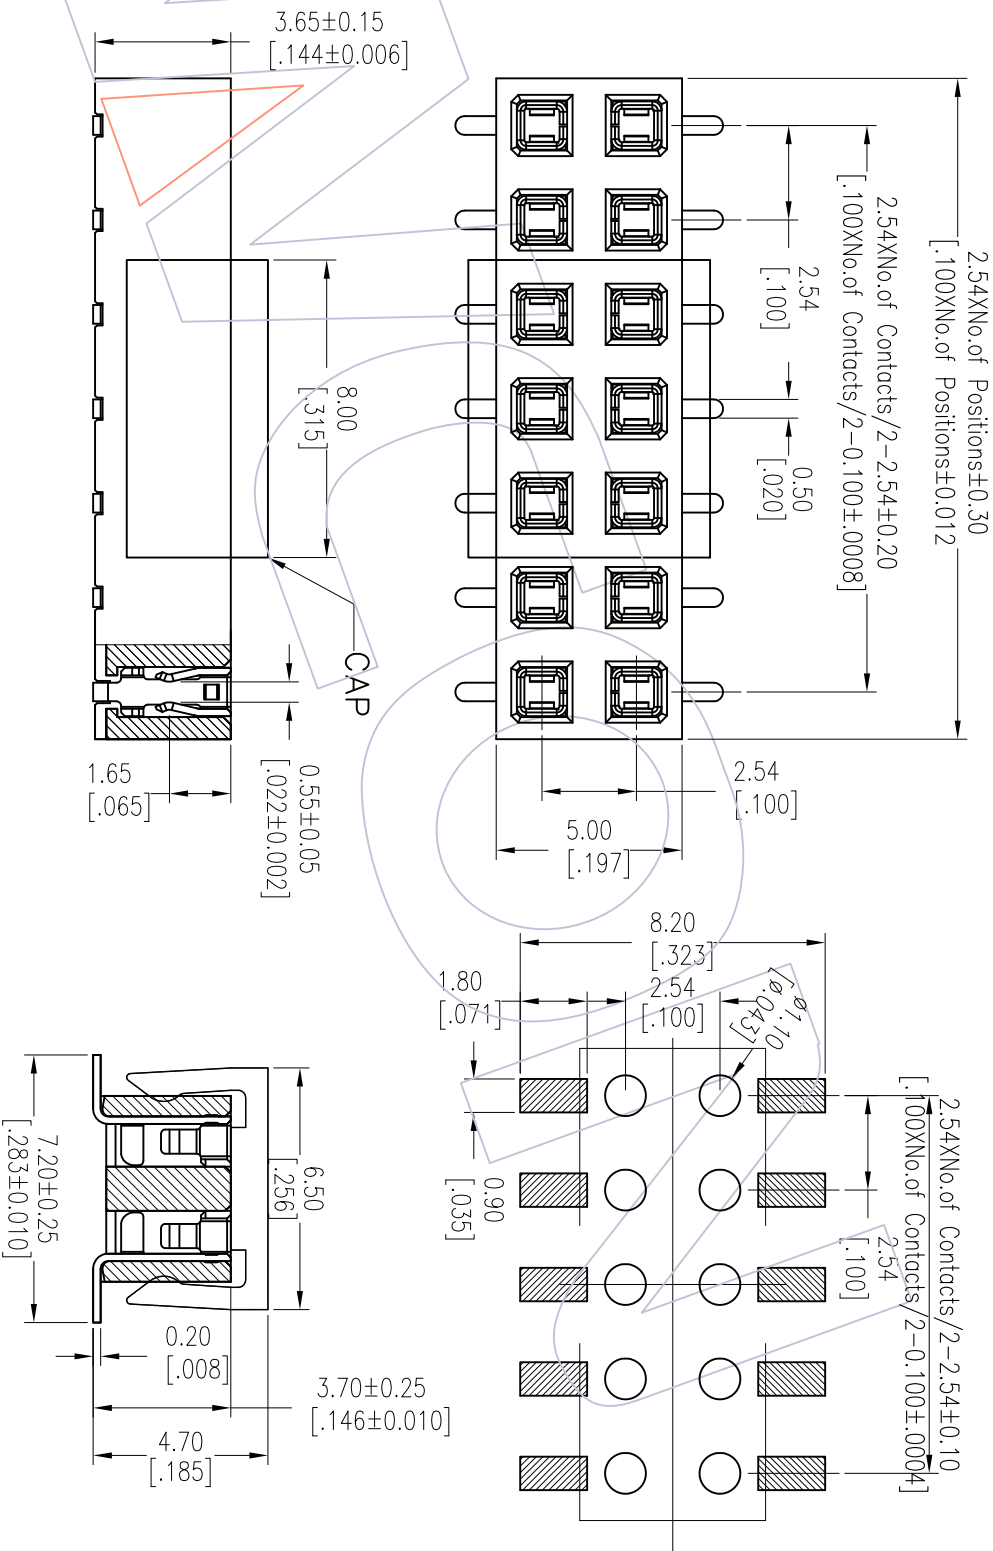

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A0	2015.01.08	NEW	-----	XX	CHEN	2015.01.08	mm	A4	2136T-2XXMXXCUNXX	FH2.54 DUAL ROW SMT TYPE
				X.XXX	CHECK	DATE	SIZE	1/1		
				Angle	APPROVE	DATE	SHEET		Customer NO.	
				± °			PROJ.			
				DIM TOL						
					Http: www.wcon.com					
					WCON-Dongguan		WCON-Kunshan			
					Tel: +86 769 85358920		Tel: +86 512 57468408			
					Fax: +86 769 85358915		Fax: +86 512 57468468			
					E-mail: sales@wcon.com		E-mail: sales@wcon.com			