
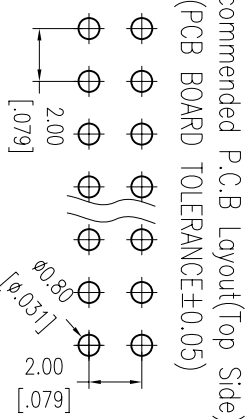


HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000V/MS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3 (C36000)
 Connecting Pin: Ø0.47mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)

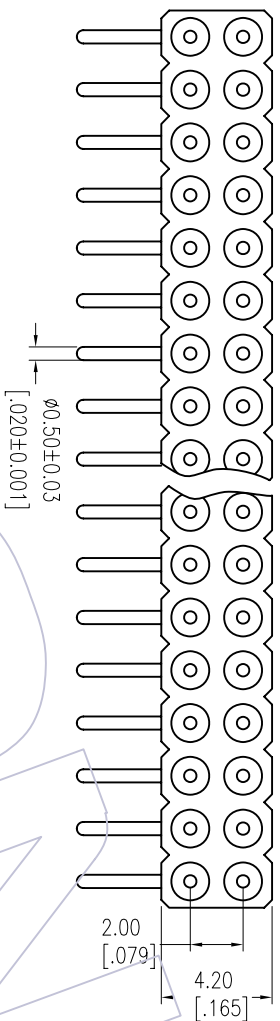



Ordering Information

3512-282 XX R XX 118 X 1 Δ

No. of Pin
 2-40PIN

Contact Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 G5=30u"Gold
 SN=In

Packing
 A=Tray
 T=Tube

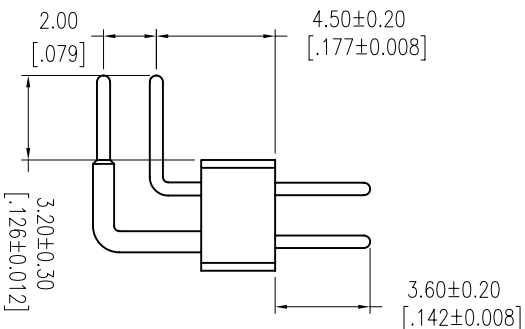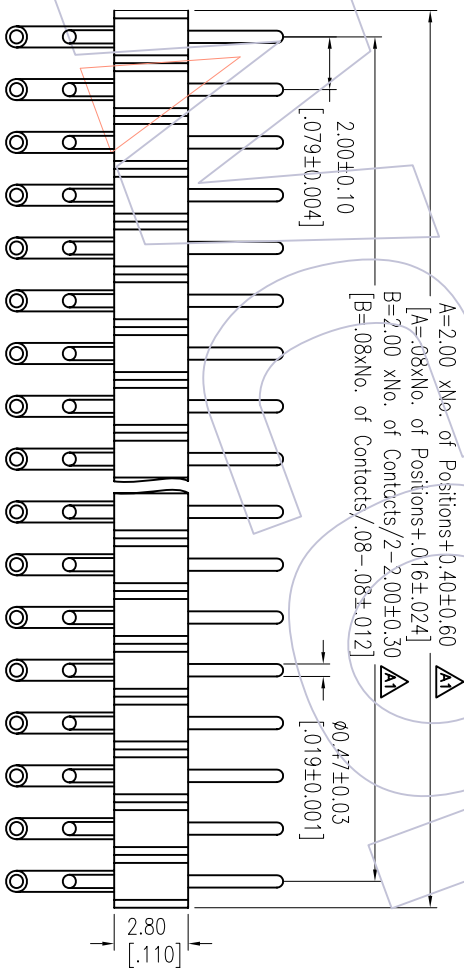

| | | | | | | | | | | | |
|-----|----------|--------------------------|--|---------|--|--------------------|--|---|--|---|---|
| | | OPERATION | | DRAW | | PART NO. | | TITLE: | | WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com | WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: wconks@wcon.com |
| | | MY Q | | DATE | | 3512-282XXRXX118X1 | | 2.00mm MACHINED PIN HEADER DUAL ROW 90° H=2.80 L=12.15 | | | |
| A1 | 11/12/30 | Modify drawing | | DATE | | SCALE | | FIT | | | |
| A0 | 09/02/26 | NEW | | CHECK | | UNIT | | mm | | | |
| REV | DATE | MODIFICATION DESCRIPTION | | APPROVE | | SHEET | | 1/1 | | Customer NO. | |
| | | CHANGE | | DIM | | Angle | | ± 3° | | | |
| | | | | TOL | | | | | | | |

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A