



TECHNICAL SPECS:





Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: Ø0.47mm
 Insulator Material: PPS+ 30%G.F.(UL94V-0)

Ordering Information
 3510-191 XX S XX 076 X 1

No. of Pin: 2~50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

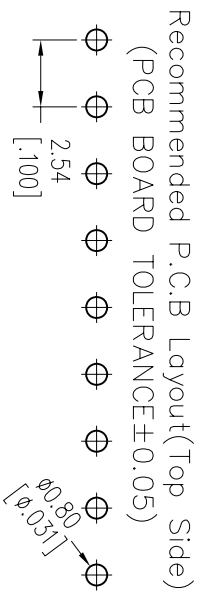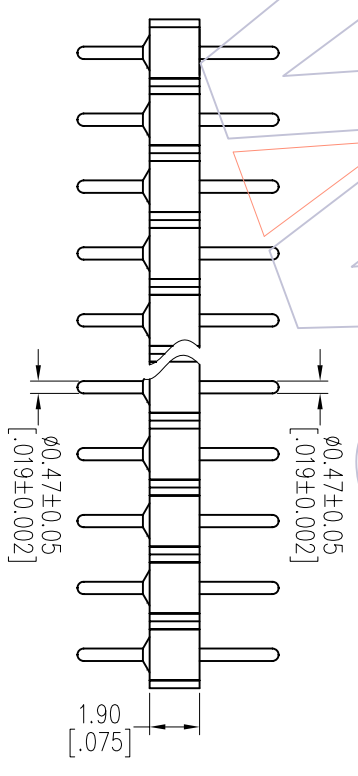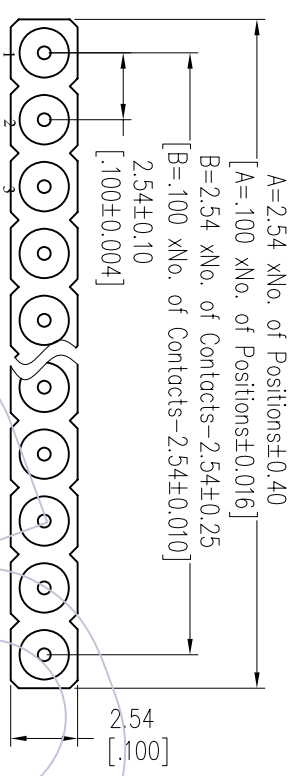

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuong		2012/10/22		mm				3510-191XXSXX076X1	
X.XX	±0.25	CHECK		DATE		A4				TITLE:	
X.XXX	±0.15			DATE		1/1				2.54mm MACHINED PIN HEADER	
Angle	± 3'	APPROVE		DATE		PROJ.				SINGLE ROW 180° H=1.90 L=7.64	
CHANG	DIM	TOL								Customer NO.	
WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com						WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com					