

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP

Contact Resistance: 10m Ω Max

Dielectric Strength: Min 1000V_{RMS}

Mechanical Life: Min 500 cycles

Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: ϕ 0.49mm

Insulator Material: PPS+30%G.F(UL94V-0)

Ordering Information


3510-191 XX S XX 085 X 1

No. of Pin
2-50PIN

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold

Packing
A=Tray
T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

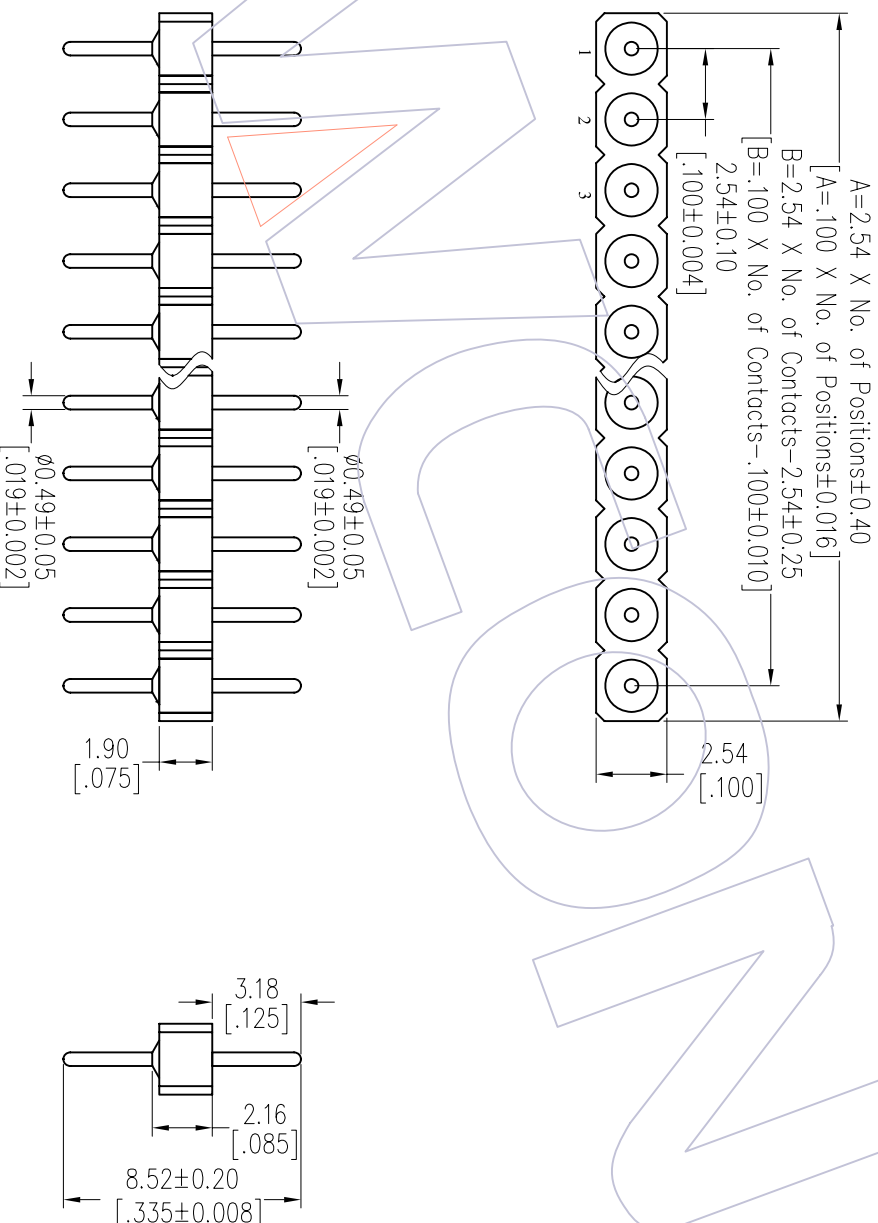

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.				
XX	JYHuang	2012/10/22	mm		3510-191XXSXX085X1				
XX	CHECK	DATE	SIZE	A4	TITLE:				
X.XXX	Angle	\pm 3'	SHEET	1/1	2.54mm MACHINED PIN HEADER SINGLE ROW 180° H=1.90 L=8.52				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	Customer NO.
A0	2012/10/22	NEW							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	PROJ.	Customer NO.

WCON-Dongguan [Http: www.wcon.com](http://www.wcon.com) WCON-Kunshan

Tel: +86 769 85358920 Fax: +86 512 57468408
Tel: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: sales@wcon.com