

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C


Sleeve: Brass CuZn36Pb3(C360000)
 Contact plating: Au over Ni
 Connecting Pin: $\phi 0.47\text{mm}$
 Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information

3510-192 XX S XX 076 X 1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

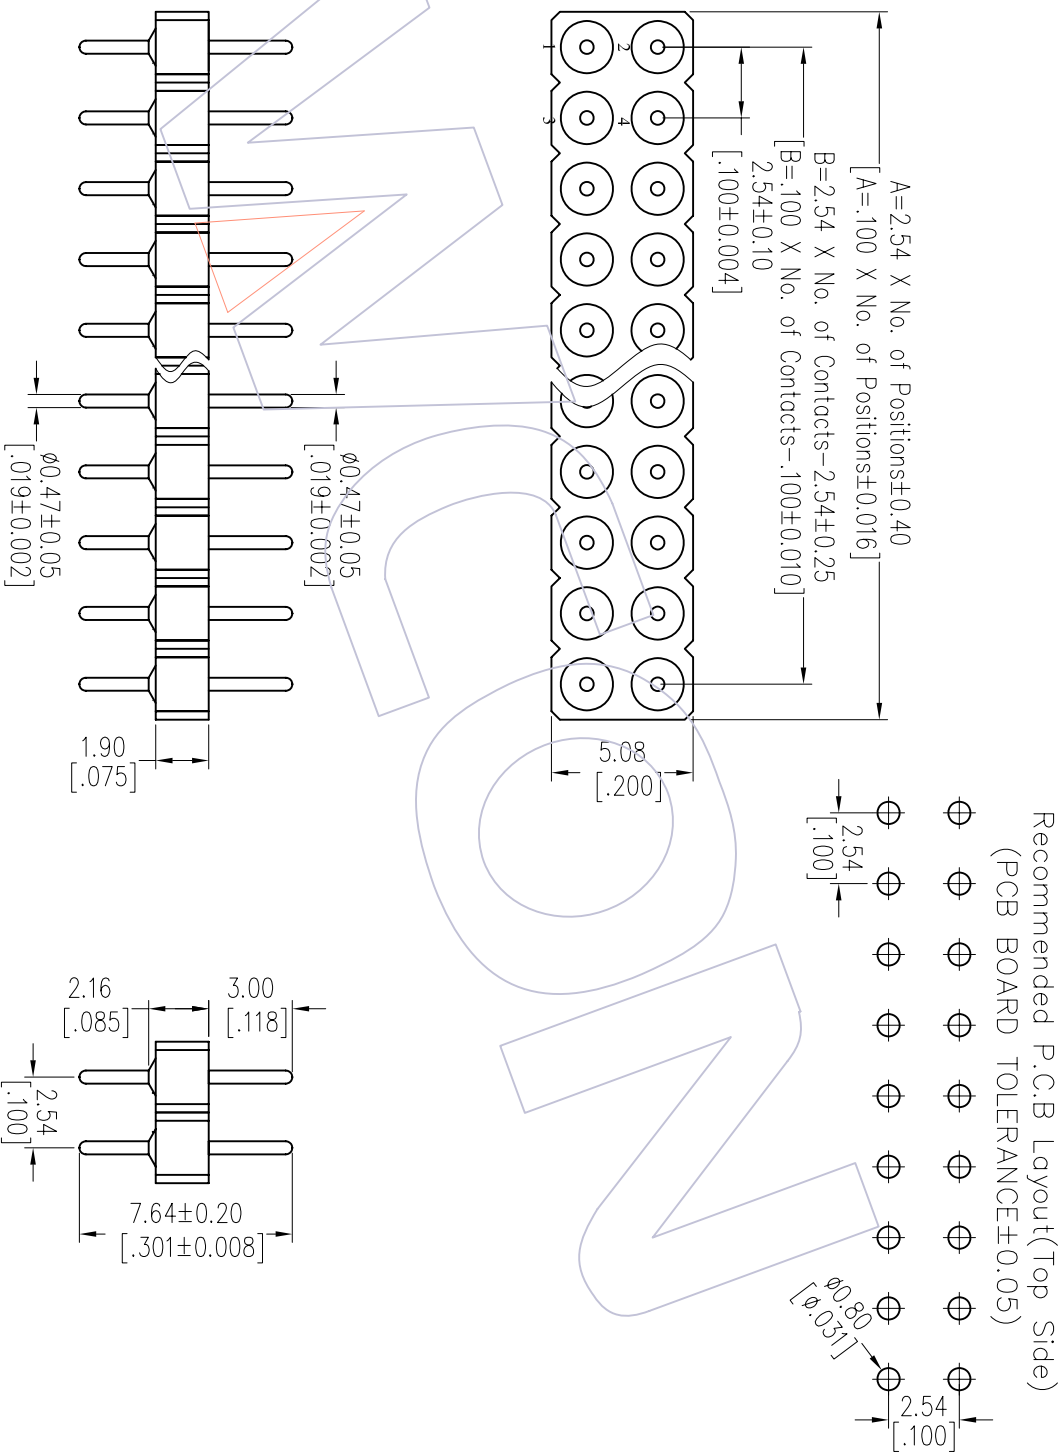

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuang		2012/10/22		mm				3510-192XXSX076X1	
CHECK		CHECK		DATE		SIZE		SHEET		TITLE:	
X.XX	±0.25					A4		1/1		2.54mm MACHINED PIN HEADER DUAL ROW 180° H=1.90 L=7.64	
ANGLE		APPROVE		DATE		PROJ.		Customer NO.		Customer NO.	
X.XXX	±0.15										
CHANGE		CHANGE		CHANGE		CHANGE		CHANGE		CHANGE	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE		DIM		TOL		CHANGE	
A0	2012/10/22	NEW		---		Angle		± 3°		---	
WCON-Dongguan		WCON-Kunshan		Http: www.wcon.com		Tel: +86 769 85358920		Tel: +86 512 57468408		Fax: +86 512 57468468	
WCON-Dongguan		WCON-Kunshan		Http: www.wcon.com		Tel: +86 769 85358915		Tel: +86 512 57468408		Fax: +86 512 57468468	
WCON-Dongguan		WCON-Kunshan		Http: www.wcon.com		Tel: +86 769 85358915		Tel: +86 512 57468408		Fax: +86 512 57468468	
WCON-Dongguan		WCON-Kunshan		Http: www.wcon.com		Tel: +86 769 85358915		Tel: +86 512 57468408		Fax: +86 512 57468468	

WCON

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com