

HSHF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C


Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: Ø0.49mm
 Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information

3510-192 XX S XX 085 X 1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

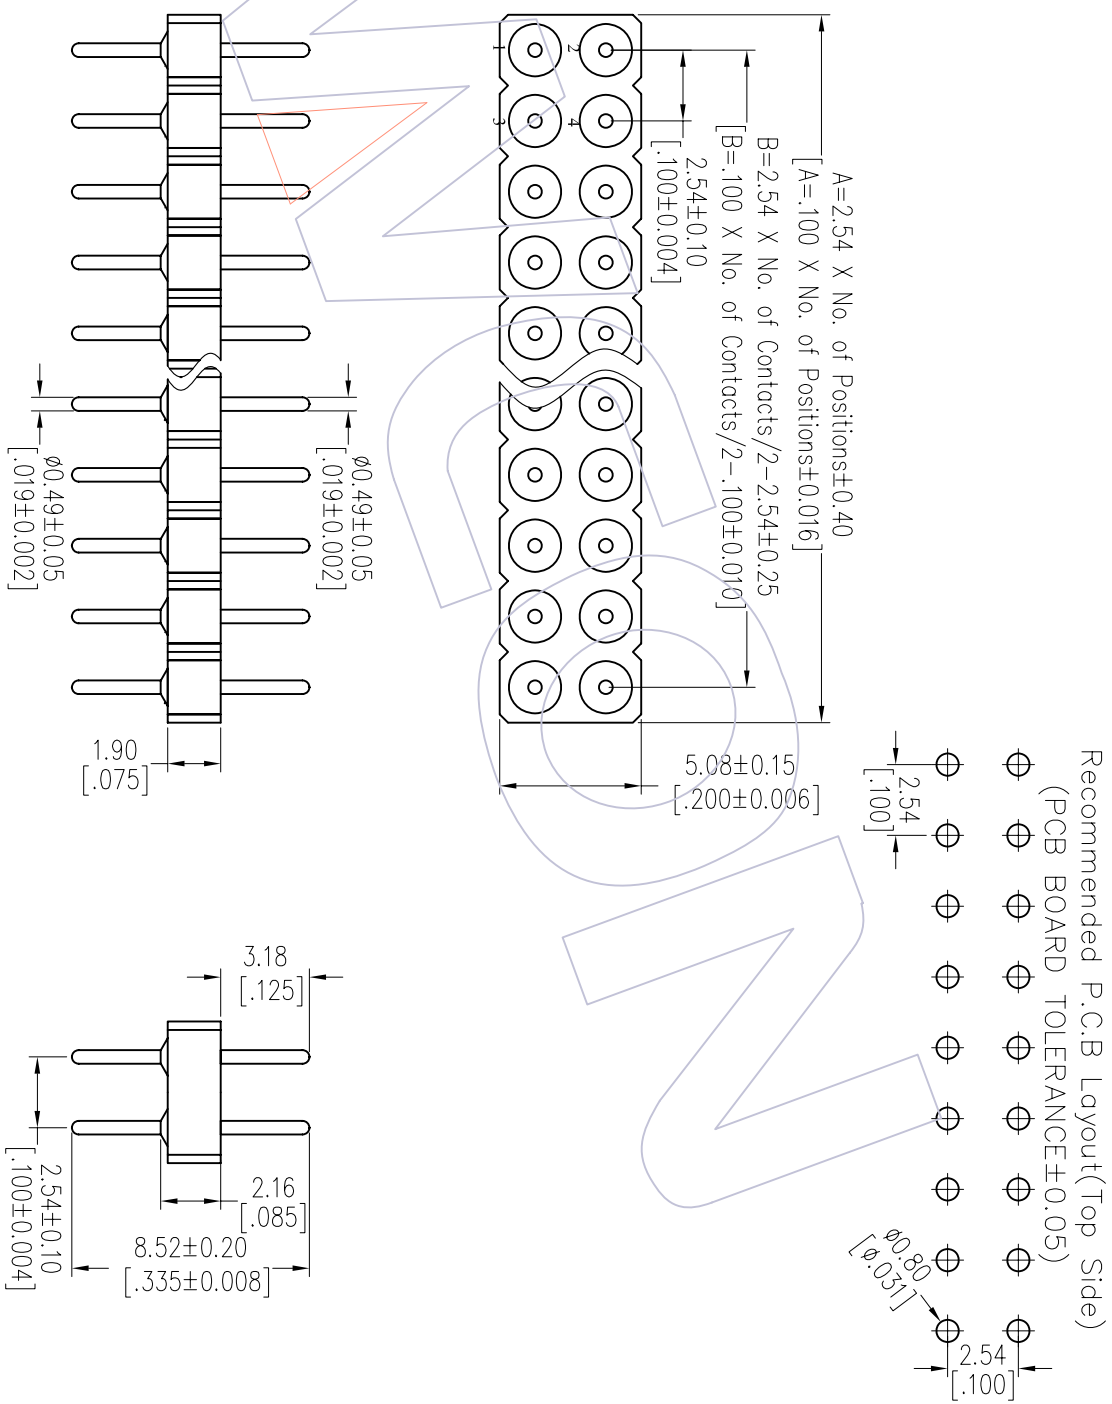

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/10/22	NEW		XX	JYHuang	2012/10/22	mm	A4	3510-192XXSXX085X1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	
				XX	JYHuang	2012/10/22	mm	A4	3510-192XXSXX085X1	
				X.XXX	CHECK	DATE	SIZE	A4	TITLE:	
				X.XXX	CHECK	DATE	SIZE	A4	2.54mm MACHINED PIN HEADER	
				Angle	± 3°	DATE	SHEET	1/1	DUAL ROW 180° H=1.90 L=8.52	
				DIM	TOL	DATE	PROJ.		Customer NO.	