

HSF

TECHNICAL SPECS:
 Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: ∅0.49mm
 Insulator Material: PPS+30%G.(UL94V-0)





Ordering Information

3510-301 XX S XX 122 X 1

No. of Pin
2-50PIN

Contact Plating
G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold

Packaging
A=Tray
T=Tube

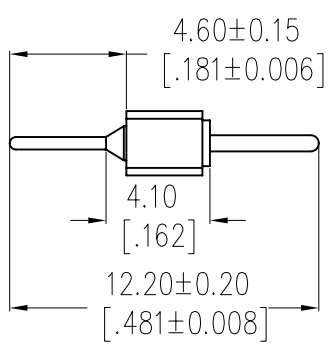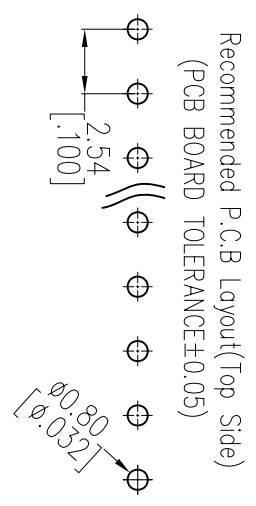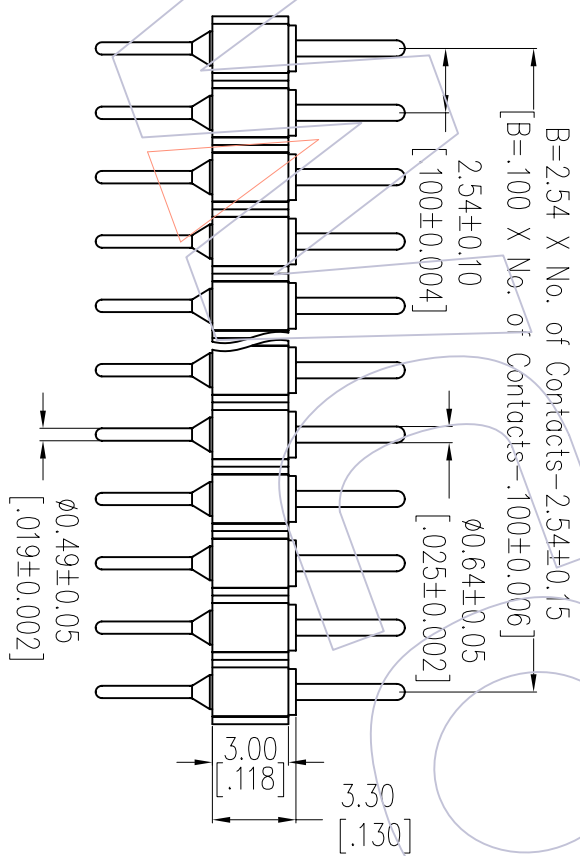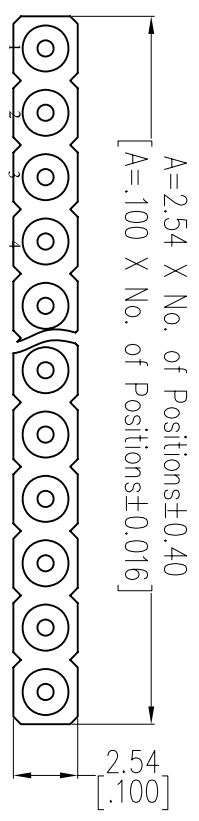

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/10/22	UNIT	mm	3510-301XXSXX122X1
XX	CHECK	DATE	SIZE	A4	TITLE:
X.XXX	±0.25		1/1		2.54mm MACHINED PIN HEADER
Angle	±0.15				SINGLE ROW 180° H=3.00 L=12.2
APPROVE	DATE				Customer NO.
CHANGE					
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/10/22	NEW			

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com