HSF

TECHNICAL SPECS:
Current Rating: 3.0AMP
Contact Resistance: 10m Ω Max
Dielectric Strength: Min 1000VRMS
Mechanical Life: Min 500 cycles
Operation Temperature: −40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
Contact plating: Au over Ni
Connecting Pin: ø0.50mm
Insulator Material: PPS+30%G.F(UL94V−0)

Ordering Information

3510-301 XX S XX 137 X 1

- XX: No. of Pin 2~50PIN
- XX: Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold
- X: Packing A=Tray T=Tube

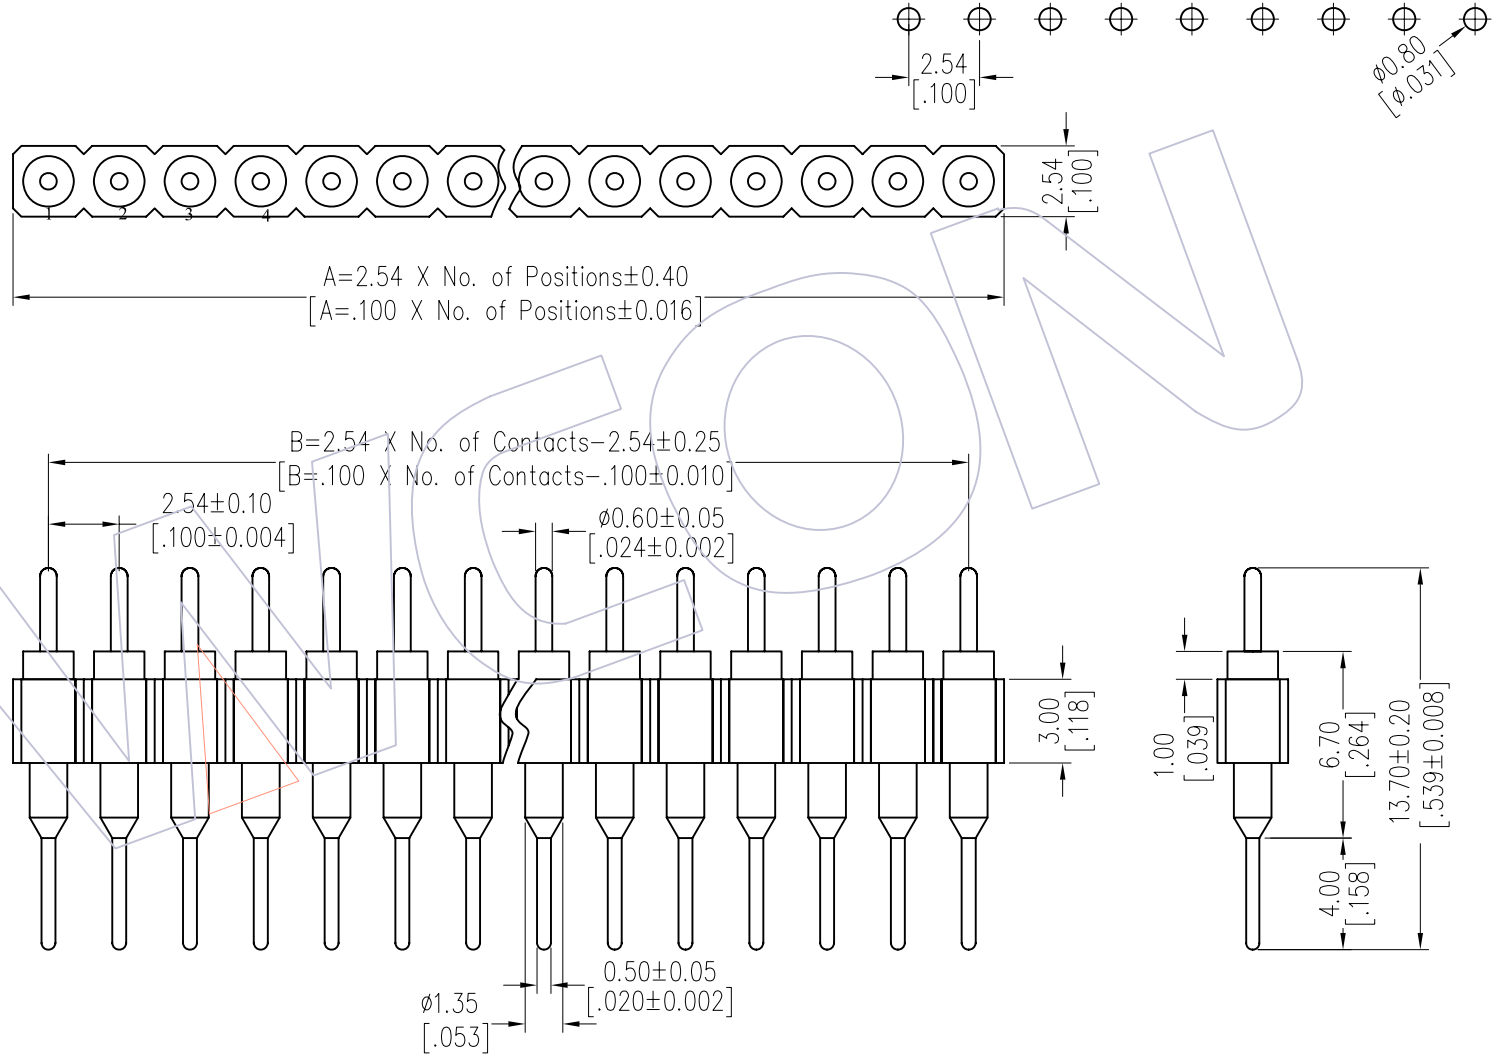

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/10/22	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/10/22
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3510-301XXSXX137X1

TITLE: 2.54mm MACHINED PIN HEADER SINGLE ROW 180° H=3.00 L=13.7

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com