

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C




Sleeve: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Connecting Pin: ø0.60mm
 Insulator Material: PPS+30%G.(F(UL94V-0))

Ordering Information

3510-302 XX S XX 119 X1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

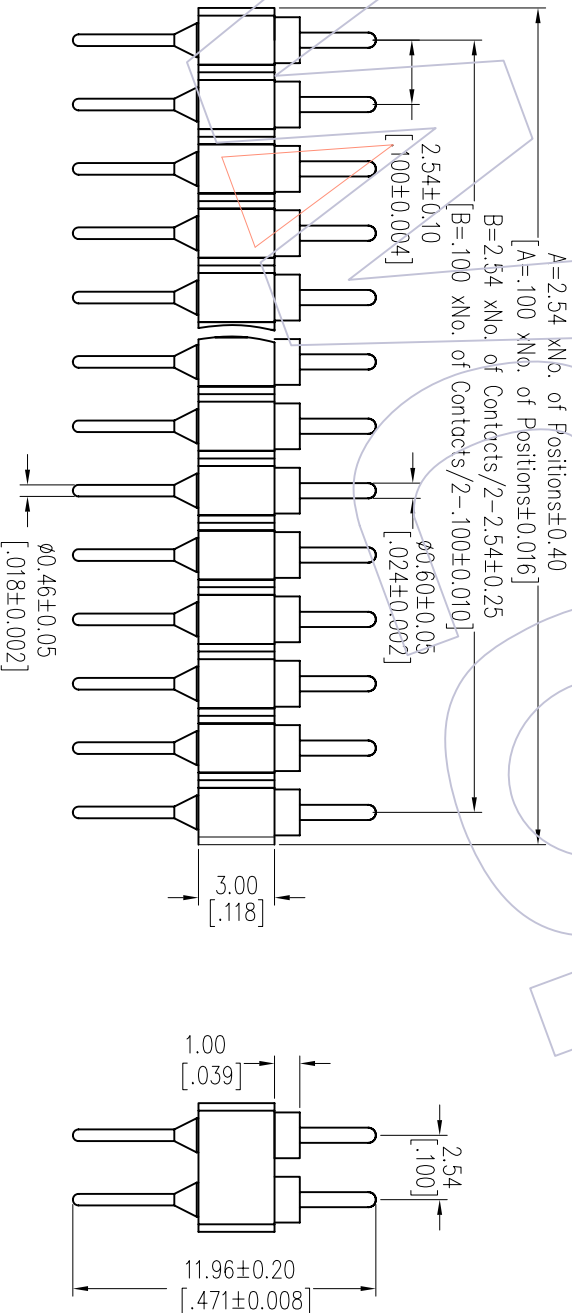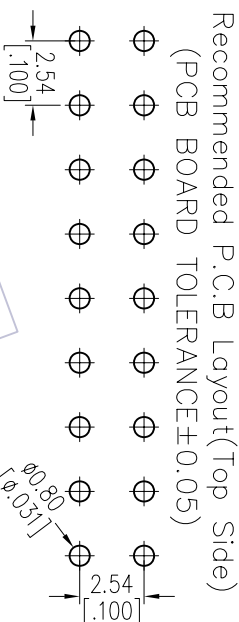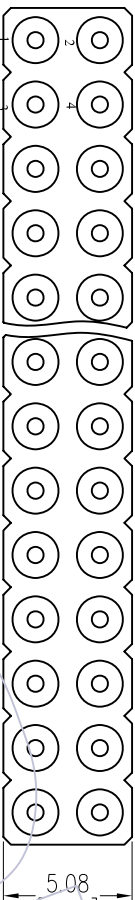

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuang		2012/10/22		mm				3510-302XXSXX119X1	
XX	±0.25	CHECK		DATE		A4				TITLE: 2.54mm MACHINED PIN HEADER DUAL ROW 180° H=3.00 L=11.96	
X	±0.15	Angle	± 3°	APPROVE	DATE	SHEET	1/1	PROJ.		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	DIM	TOL				
A0	2012/10/22	NEW									

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com