

HSF

TECHNICAL SPECS:



Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: φ0.49mm

Insulator Material: PPS+30%G.F(UL94V-0)

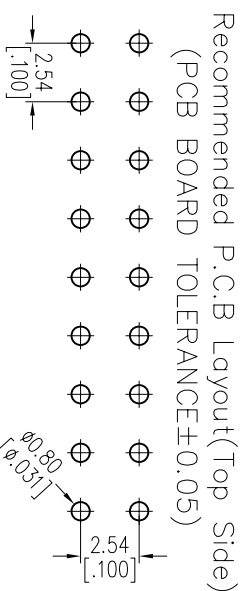
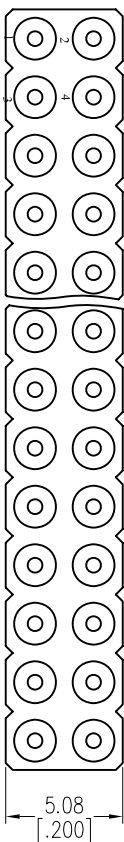


Ordering Information

3510-302 XX S XX 122 X 1

No. of Pin
 2-50PIN
 Contact Plating
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packing
 A=Tray
 T=Tube

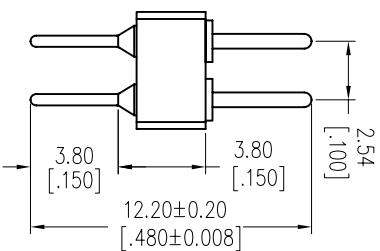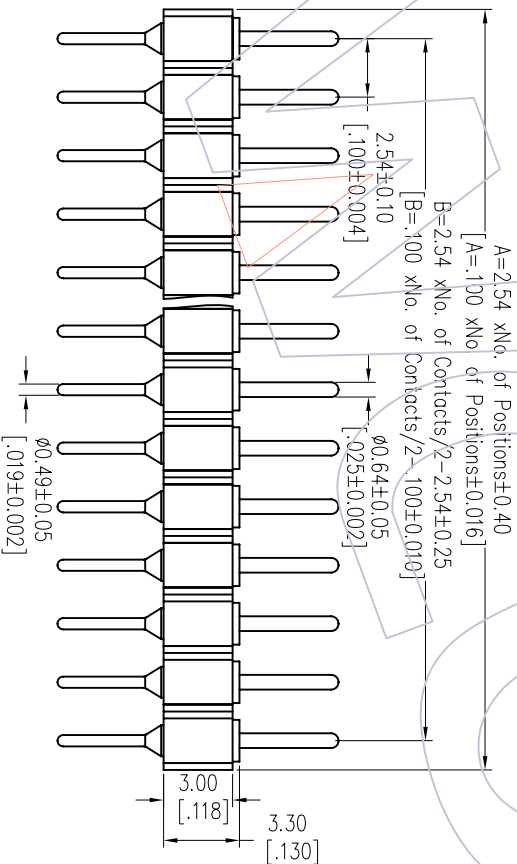

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX	±0.40	JYHuang	CHECK	2012/10/22	mm	3510-302XXSXX122X1			TITLE: 2.54mm MACHINED PIN HEADER DUAL ROW 180° H=3.00 L=12.2		
X.XX	±0.25				A4				Customer NO.		
X.XXX	±0.15				SHEET 1/1				Customer NO.		
Angle	± 3°		APPROVE	DATE	PROJ.				Customer NO.		
CHANG	DIM	TOL							Customer NO.		
REV	DATE	MODIFICATION DESCRIPTION							Customer NO.		
A0	2012/10/22	NEW							Customer NO.		
<p>WCON-Dongguan Http: www.wcon.com WCON-Kunshan</p> <p>Tel: +86 769 85358920 Tel: +86 512 57468408</p> <p>Fax: +86 769 85358915 Fax: +86 512 57468468</p> <p>E-mail: sales@wcon.com E-mail: sales@wcon.com</p>											

WCON