

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C




Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2150 - 1 XX R XX XUNT 1

No. of Pins per ROW: 52-40PIN
 Contact Plating: G0=Gold Flash C=PA9T
 Insulator: C=PA9T
 Packing: T=Tube
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

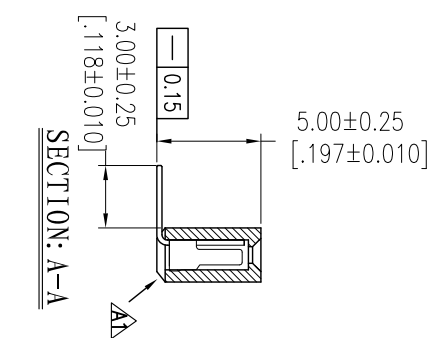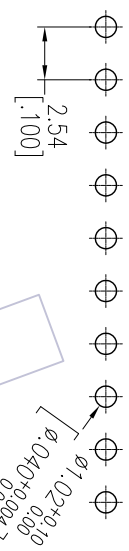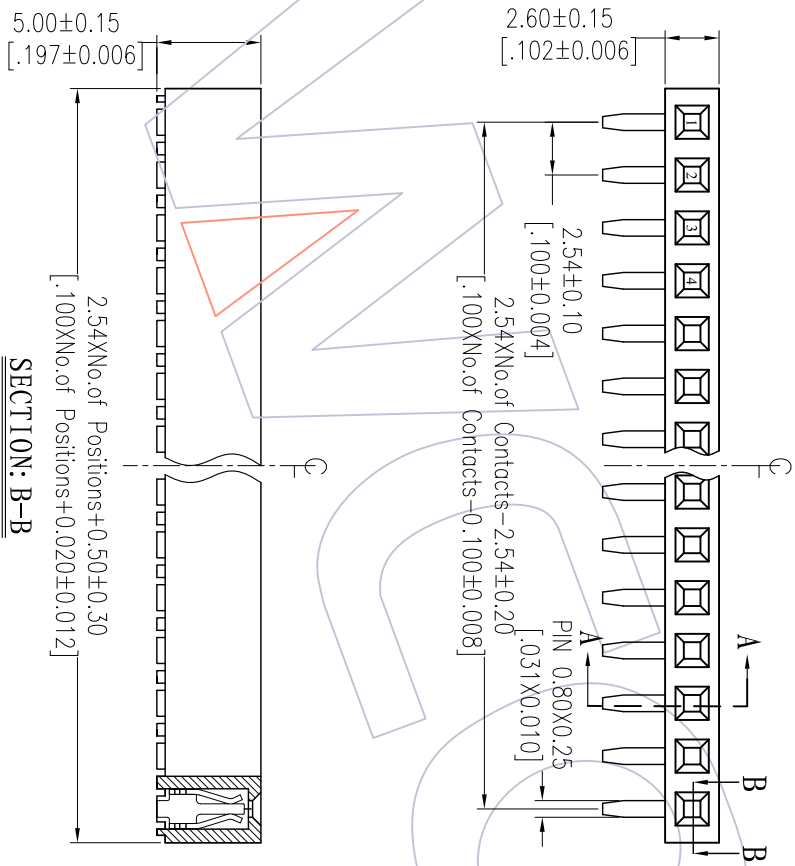

REV	DATE	MODIFICATION DESCRIPTION
A1	2014/05/03	Modify drawing
A0	2012/08/04	NEW

OPERATION	DRAW	DATE	SCALE	PART NO.
XX	Wang	2014/05/03	mm	2150-1XXXXXUNT1
XX	CHECK	DATE	UNIT	TITLE:
X.XXX	± 0.15	DATE	A4	PHI.54 SINGLE ROW 90° DIP H=5.0
Angle	± 3'	DATE	SHEET	Customer NO.
DIM	TOL	DATE	1/1	
CHANGE	APPROVE	DATE	PROJ.	

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com