


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+30%G.F UL94V-0

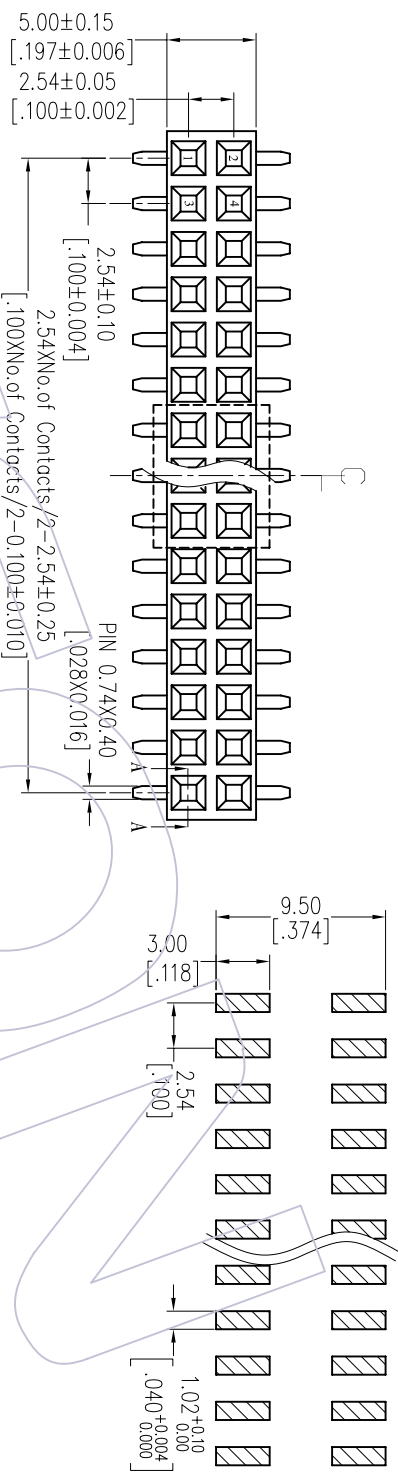

Ordering Information

2157 - 2 XX M XX C Y N X 1

- No. of Pins per ROW: 02-40PIN
- Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin
SM=Matte Tin
- Packing:
T=Tube
P=Tube+CAP
R=Tube+Reel+CAP

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	JYHuang		2012/08/10		mm		2157-2XXMXXCYNX1	
CHECK		CHECK		DATE		UNIT		TITLE:	
X,XX	±0.25					A4		PH2.54 DUAL ROW 180° SMT IH=5.7	
Angle		APPROVE		DATE		SHEET		Customer NO.	
X,XXX	±0.15					1/1			
CHANGE DIM		TOL		PROJ.		PROJ.			
MODIFICATION DESCRIPTION		NEW		DATE		REV			
DATE		2012/08/10		REV		DATE			

WCON

WCON-Dornguon
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com