

# HSF

**NOTES:**

- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0



## Ordering Information

2157 - 2 XX R XX C Y N A 1


No. of Pins per ROW: 02-40PIN  
 Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

Packing:  
 T=Tube  
 A=Tray


Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

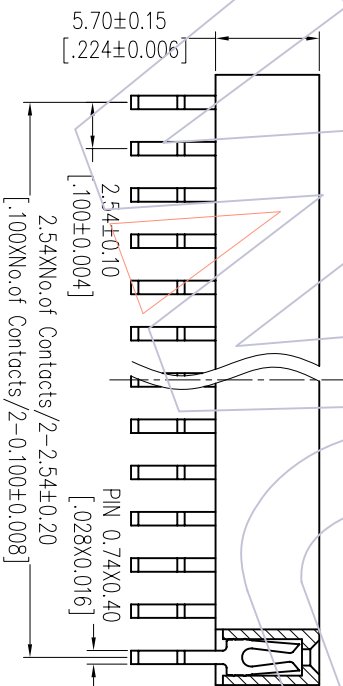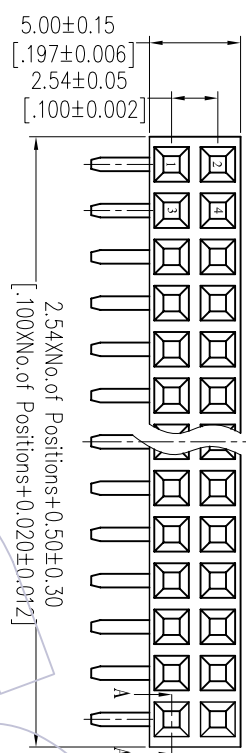

SECTION: A-A

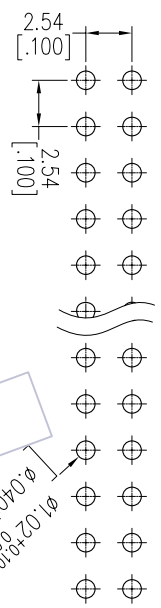

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)



OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	JYHuang		2012/08/10	mm	2157-2XXRXXCYNX1		TITLE:	
XX	±0.25	CHECK		DATE	A4	FH2.54 DUAL ROW 90° DIP H=5.7		Customer NO.	
X.XXX	±0.15	Angle	± 3°	APPROVE	SHEET	1/1		WCON-Dongguan	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	PROJ.		Http: www.wcon.com
A0	2012/08/10	NEW							WCON-Kunshan

# WCON

Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com