


# HSF

**NOTES:**

Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

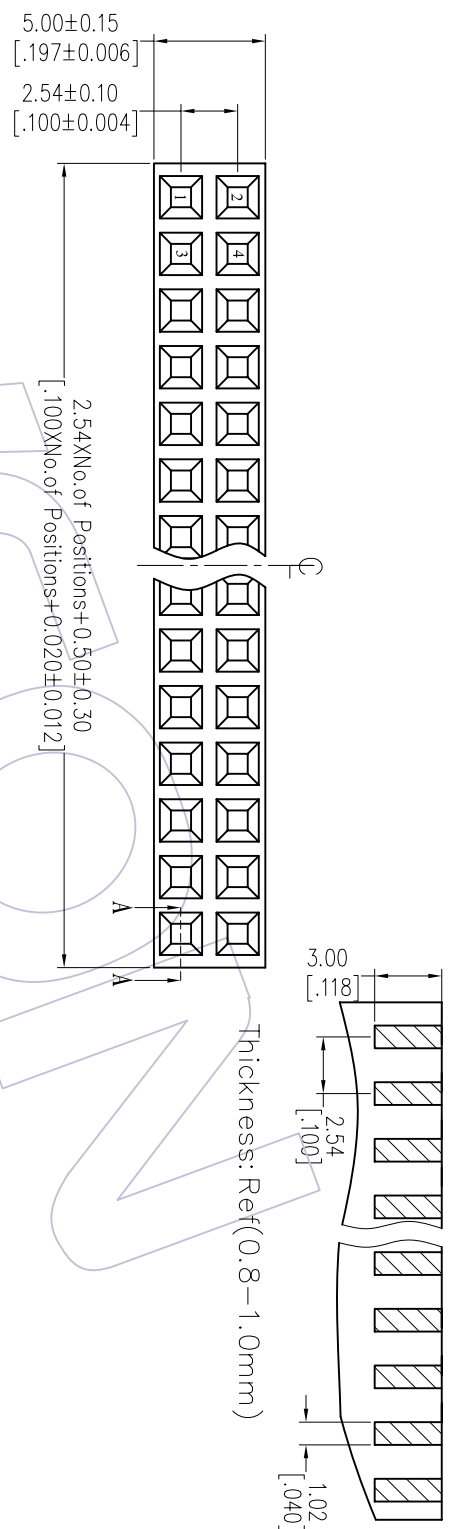



## Ordering Information

2157 - 2 XX C XX C Y N T 1

No. of Pins per Row: 2-40PIN  
 Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

Packing:  
 T=Tube

|           |       |                |
|-----------|-------|----------------|
| Item      | Pitch | Mating         |
| Standard  | 2.54  | 1115/1120/1125 |
| Alternate |       |                |

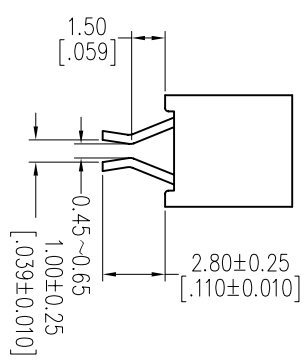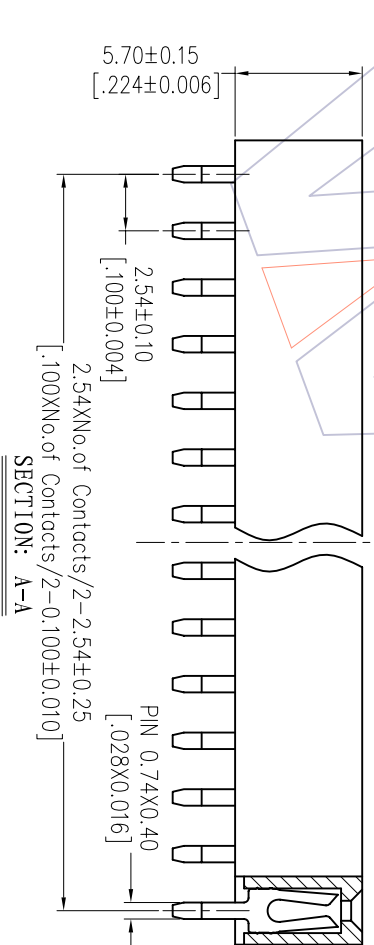

|     |            |                          |        |           |         |            |       |       |                  |  |  |
|-----|------------|--------------------------|--------|-----------|---------|------------|-------|-------|------------------|--|--|
| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW    | DATE       | SCALE | FIT   | PART NO.         | TITLE:<br>FH2.54 DUAL ROW SPLINT H=5.7<br>Customer NO.                   | WCON-Dongguan<br>Http: www.wcon.com<br>WCON-Kunshan                      |
| A0  | 2012/08/10 | NEW                      | -----  | XX        | JYHuang | 2012/08/10 | mm    | A4    | 2157-2XXCXXCYNT1 |  |  |
| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | DIW       | CHECK   | DATE       | SIZE  | SHEET | PROJ.            | Tel: +86 769 85358920<br>Fax: +86 769 85358915<br>E-mail: sales@wcon.com | Tel: +86 512 57468408<br>Fax: +86 512 57468468<br>E-mail: sales@wcon.com |

# WCON

Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com