

HSF

NOTES:




- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2157-1 XX R XX CYN A I

- No. of Pins per Row: 02-40PIN
- Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
- SO=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin
- SN=Tin, SM=Matte Tin
- Packaging: T=Tube, A=Tray

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

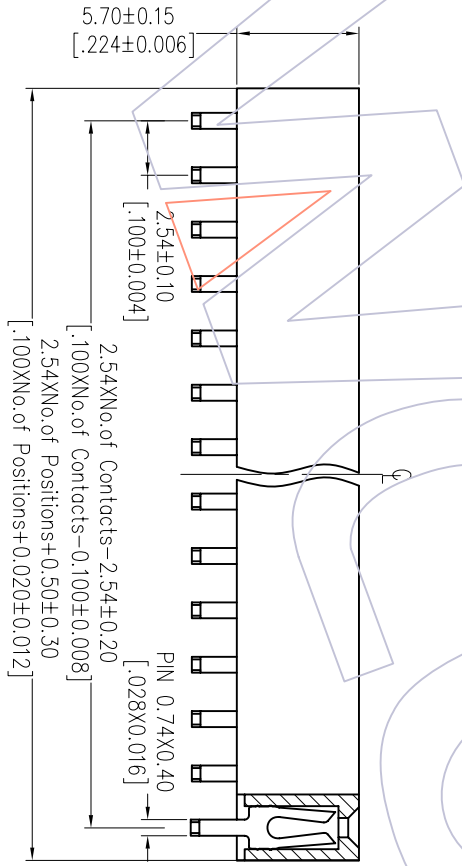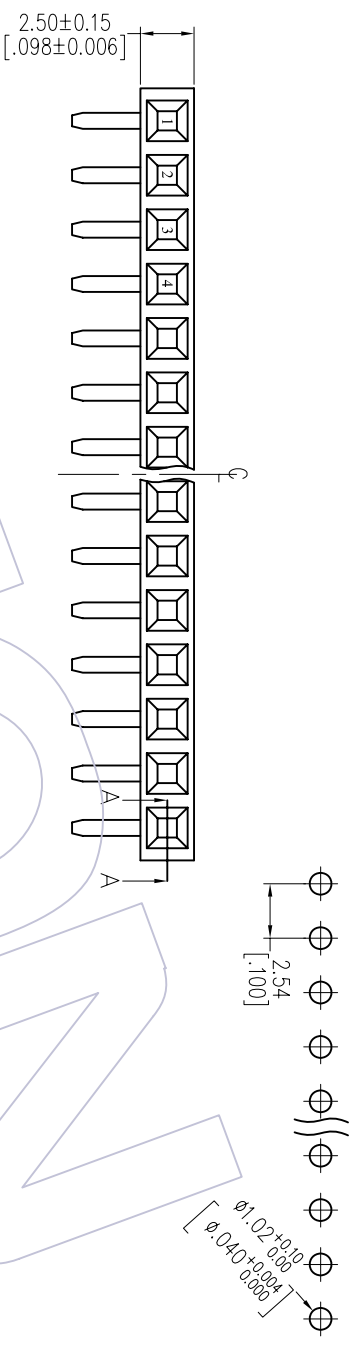

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE: FH2.54 SINGLE ROW 90° DIP H=5.7	Customer NO.
A0	2012/08/10	NEW	---	XX	JYHuang	2012/08/10	mm	A4	2157-1XXXXCYNX1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	CHECK	DATE	SHEET	PROJ.	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com		
				± 3°	APPROVE	DATE	1/1		WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com		

WCON

Http: www.wcon.com