

# HSF

**NOTES:**

Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0





## Ordering Information

2168 - 2 XX S XX CUNT 1

No. of Pins per Row: 02-40PIN  
 Contact Plating:  
 G0=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin  
 SM=Matte Tin

Packaging:  
 T=Tube

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

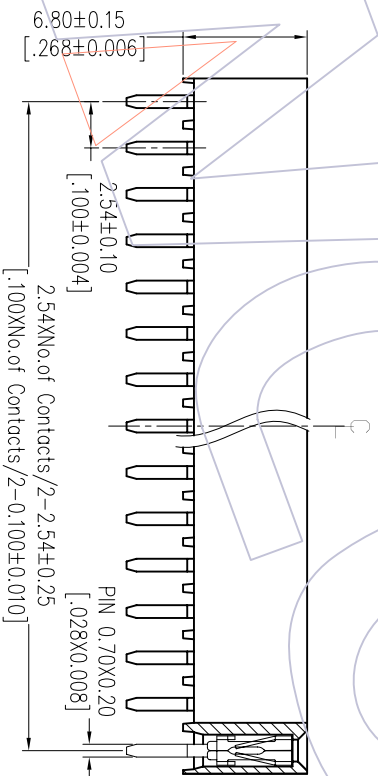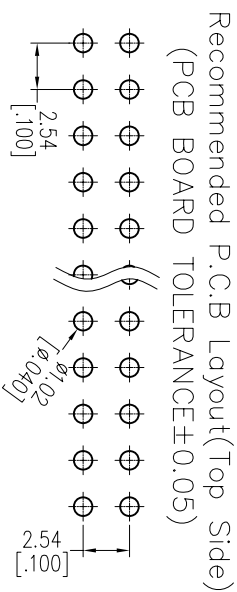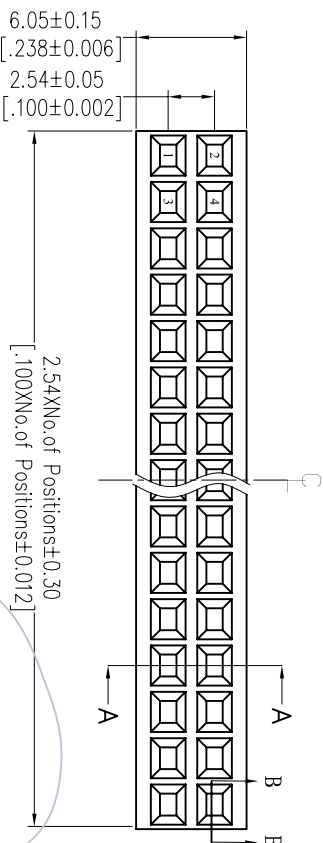

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SCALE	FIT	PART NO.	TITLE: FH2.54mm DUAL ROW 180° DIP H=6.8 Customer NO.	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/08/10	NEW								2168-2XXSXXCUNT1			
								OPERATION	DRAW	DATE	SCALE		
								XX	JYHuang	2012/08/10	mm		
								±0.40	CHECK	DATE	A4		
								±0.25			1/1		
								±0.15	APPROVE	DATE			
								± 3°					
								Angle	PROJ.				

# WCON

Http: www.wcon.com