

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2168T-1XX S XX CUNT1




No. of Pins per Row: 02-40PIN

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Mate Tin

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/08/10	NEW

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuog	2012/08/10	mm	A4	2168T-1XXSXXCUNT1
CHECK	CHECK	DATE	SIZE	SHEET	TITLE:
X.XXX	X.XXX	± 0.15	± 3°	1/1	FH2.54 SINGLE ROW 180° DIP H=6.8 TOP ENTER
APPROVE	DATE	PROJ.	Customer NO.		

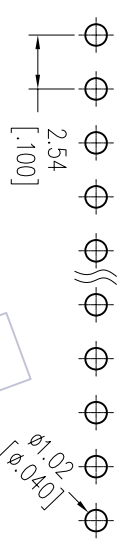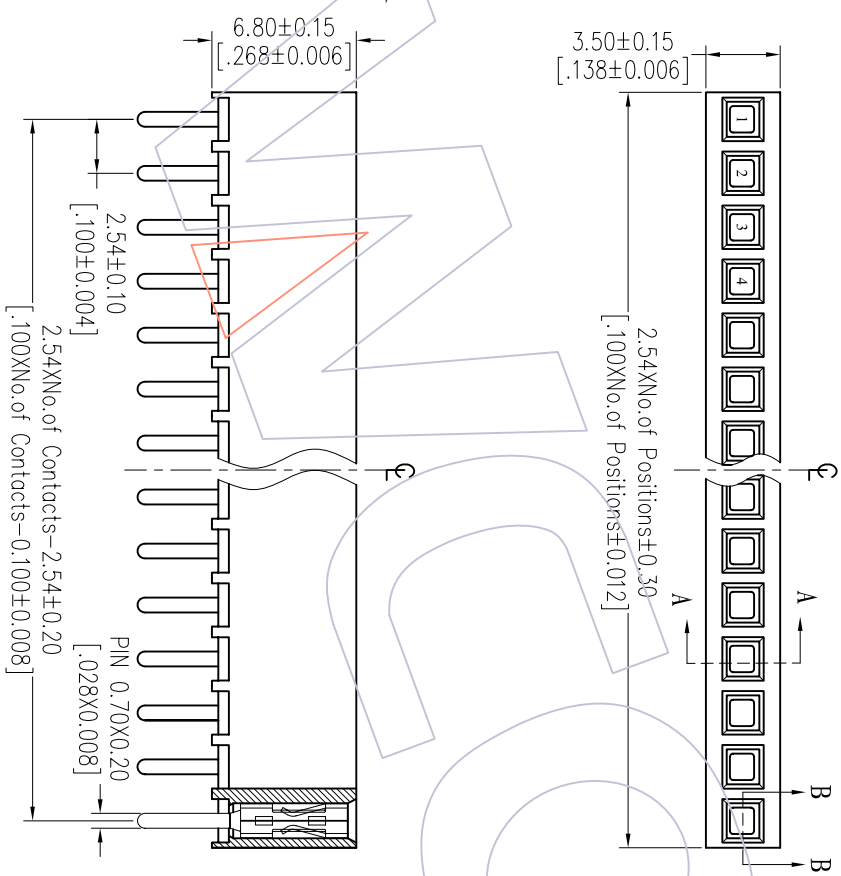

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com