

HSE


NOTES:

- Rated Current: 3.0AMP
- Contact Resistance: 20mΩ max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -40°C to +105°C
- Housing Material: LCP+30%G.F.(UL94V-0)
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni

Ordering Information

2170T-2XX K XX D UNT 1

- No. of Pins 02-36P
- Contact Plating D=LCP
- G0=Gold Flash
- G3=10μ"Gold
- G4=15μ"Gold
- G5=30μ"Gold
- S0=Gold Flash/Tin
- S3=10μ"Gold/Tin
- S4=15μ"Gold/Tin
- S5=30μ"Gold/Tin
- SN=Tin
- SM=Matte Tin
- Packing T=Tube

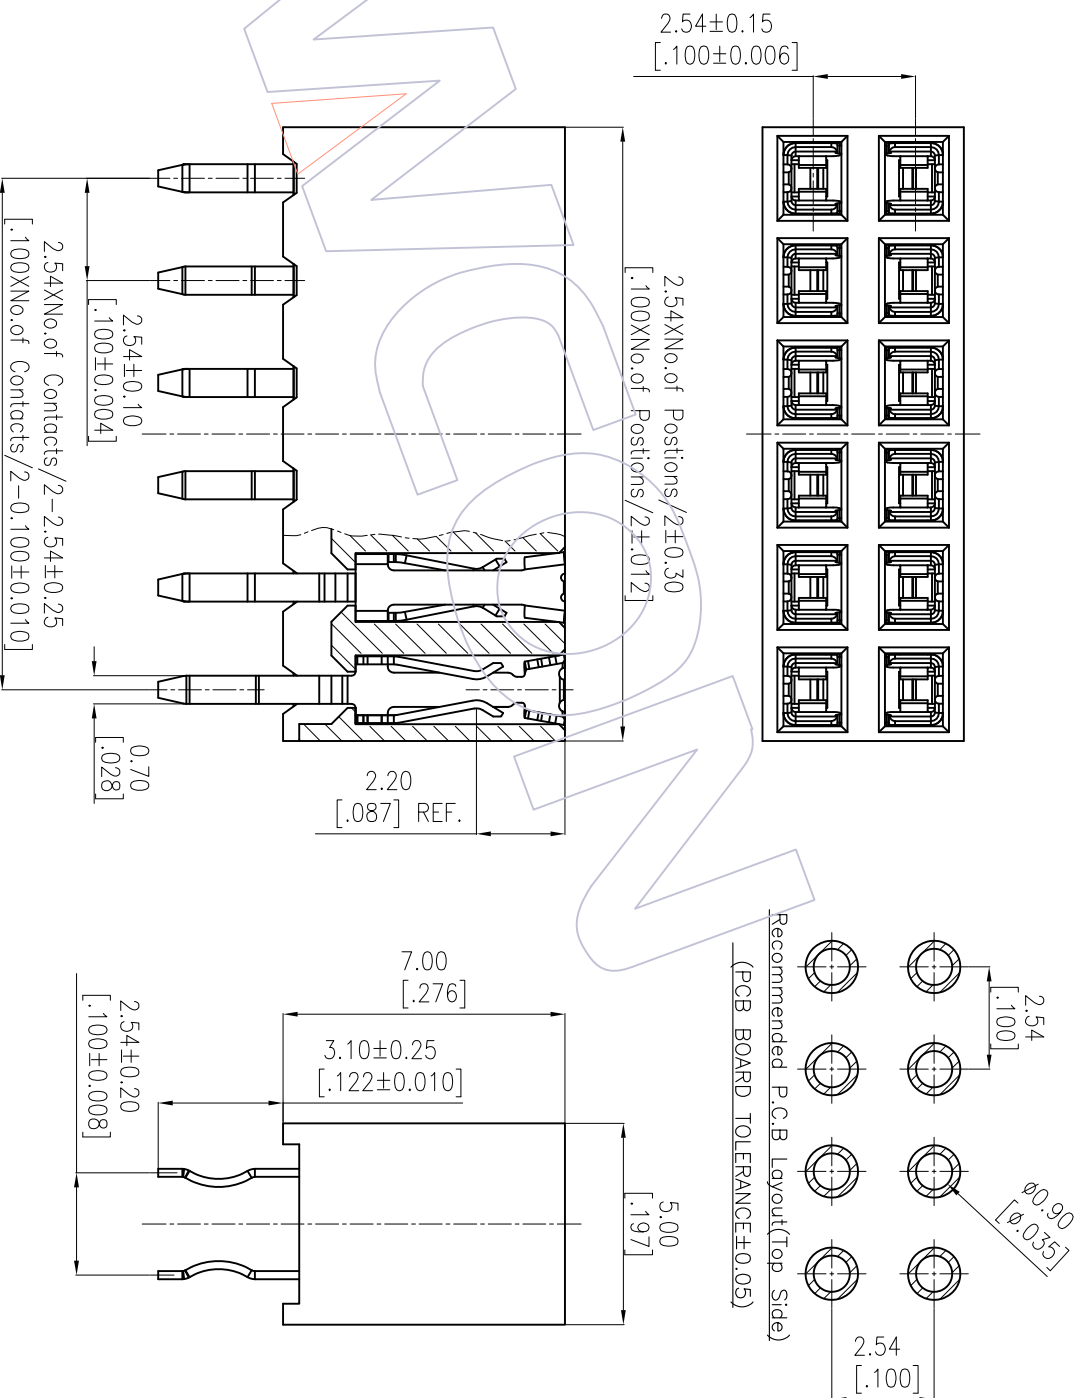

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
X.X	Wang	2014/05/09	mm	A4	2170T-2XXXXXUNT1
X.XX	CHECK	DATE	inch	1/1	TITLE:
X.XXX	±0.25		A4		2.54 PITCH VERTICAL BOTH ROWS
X.XXX	±0.15				DIP CONNECTOR 7.0mm HEIGHT
Angle	APPROVE	DATE	SHEET	PROJ.	Customer NO.
± 3'			1/1		
DIM	CHANGE				
TOL					



Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com

REV	DATE	MODIFICATION DESCRIPTION
A0	2014/05/09	NEW