

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Connecting Pin: $\phi 0.76$ mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)


Ordering Information

3511-692 XX M XX 098 X 1

No. of Pins per Row: 02-50Pm

Contact Plating:
 G0=Gold Flash
 G3=10 μ m Gold
 G4=15 μ m Gold
 G5=30 μ m Gold

Packaging:
 T=Tube
 A=Tray

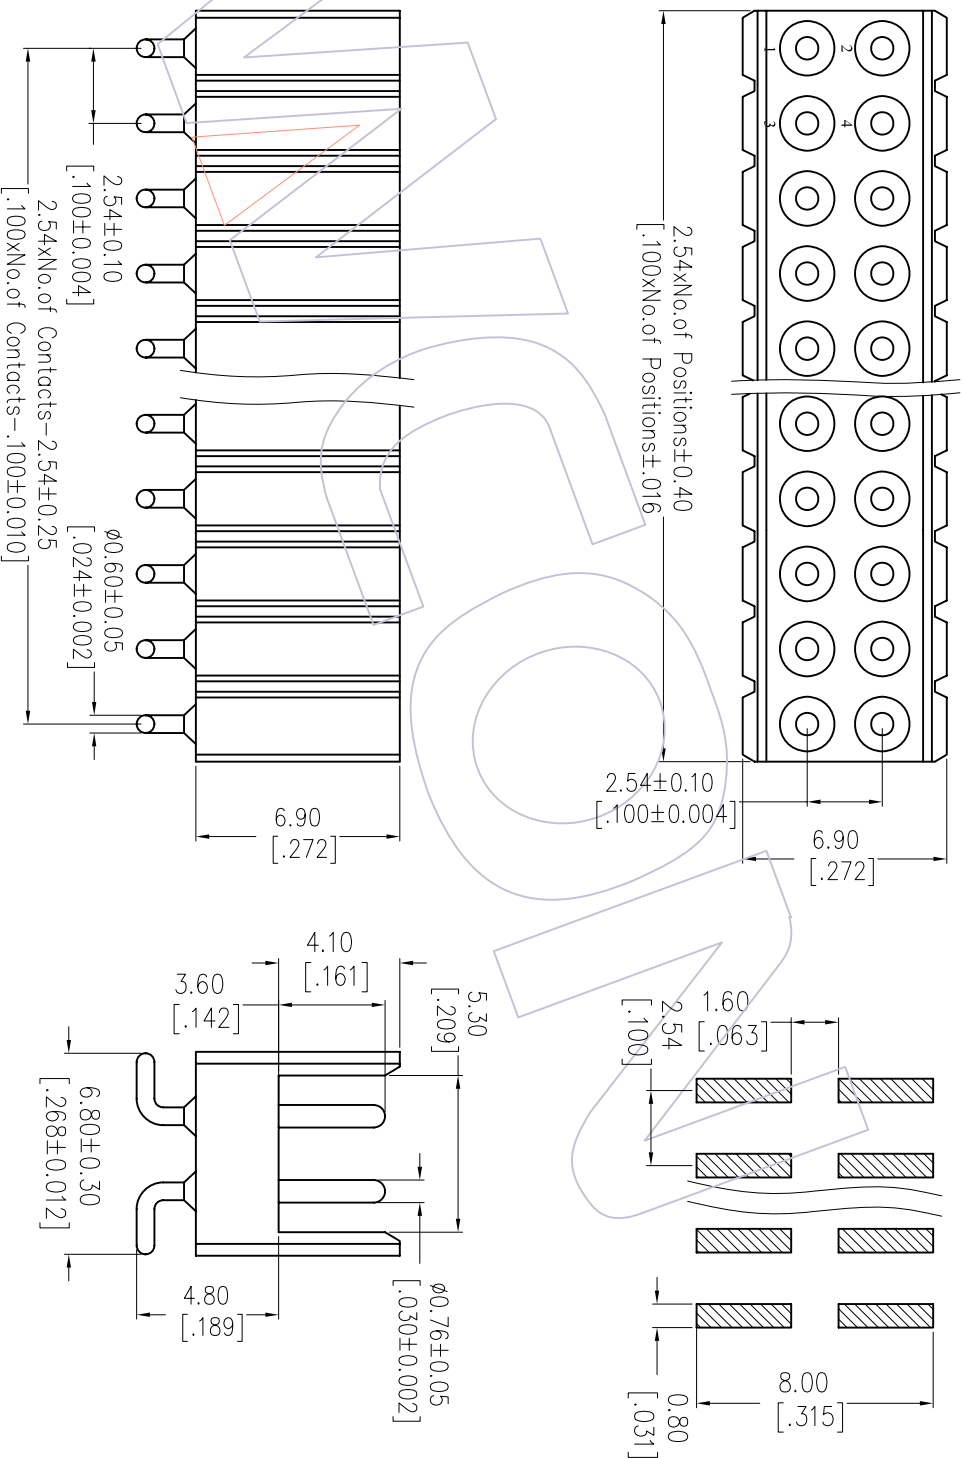

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	JYHuang		2012/10/23		UNIT	mm	3511-692XXMX098X1	
X.XX ±0.25		CHECK		DATE		SIZE	A4	TITLE:	
X.XXX ±0.15						SHEET	1/1	2.54mm MACHINED PIN HEADER	
Angle		APPROVE		DATE		PROJ.		DUAL ROW SMT H=6.90 L=9.80	
± 3°								Customer NO.	
DIM TOL									
REV	DATE	MODIFICATION DESCRIPTION			CHANGE				
A0	2012/10/23	NEW							

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com