

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C





Sleeve: Brass CuZn36Pb3(C36000)
 Connecting Pin: $\phi 0.76$ mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F(UL94V-0)

Ordering Information

3511-692 XX R XX 132 X 1

No. of Pins per Row: 02-96Pin
 Contact Plating:
 G0=Gold Flash
 G3=10 μ m Gold
 G4=15 μ m Gold
 G5=30 μ m Gold

Packing:
 T=Tube
 A=Tray

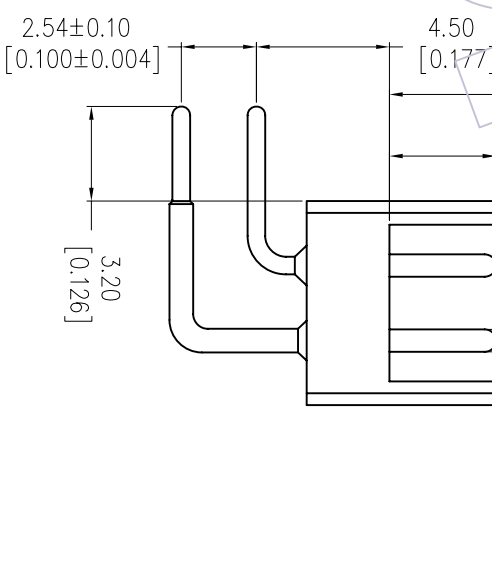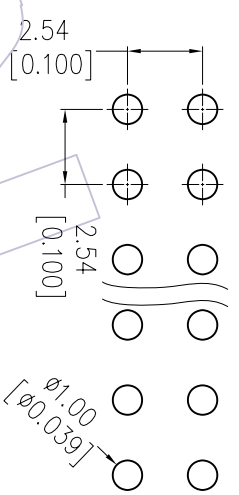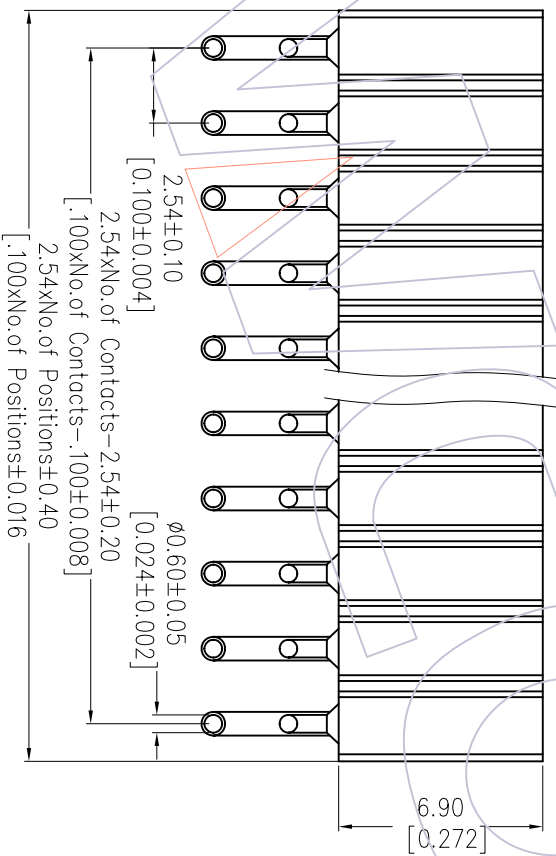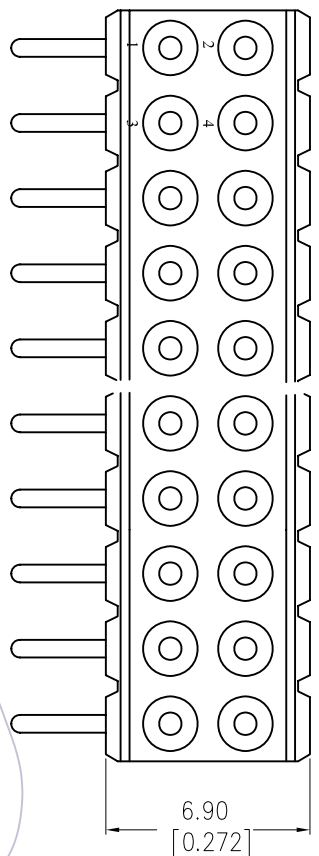

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

OPERATION	±0.40	DRAW	JYHuang	DATE	2012/10/23	SCALE	FIT	PART NO.	3511-692XXRGX132X1
X.XX	±0.25	CHECK		DATE		UNIT	mm	TITLE:	2.54mm MACHINED PIN HEADER
X.XXX	±0.15	APPROVE		DATE		SIZE	A4	DUAL ROW 90° H=6.90 L=13.2	
Angle	± 3°	PROU.				SHEET	1/1	Customer NO.	
CHANG									
REV	DATE	MODIFICATION DESCRIPTION							
A0	2012/10/23	NEW							

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com