
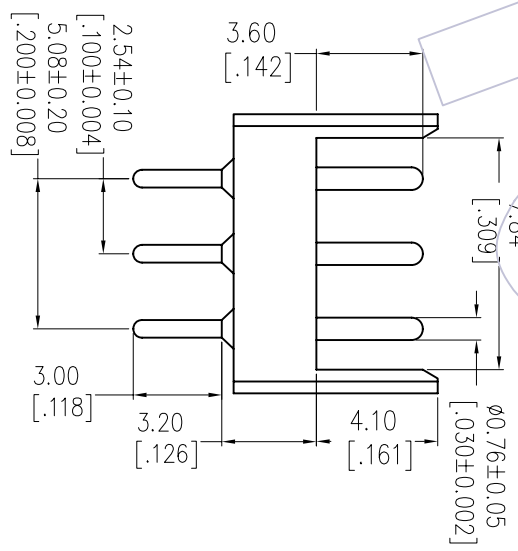
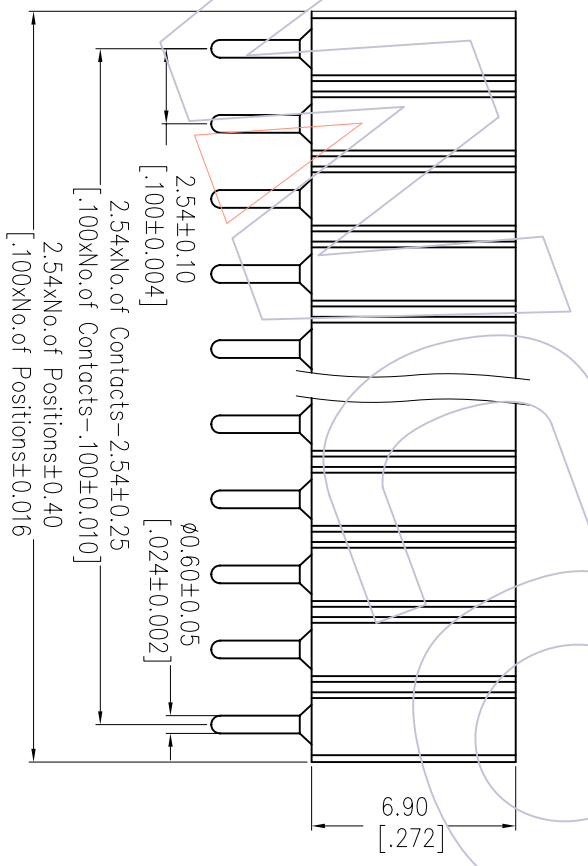
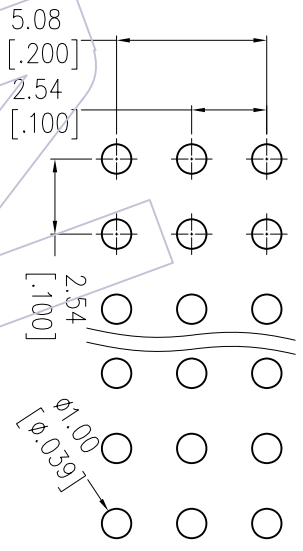


HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Connecting Pin: φ0.76mm
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F(UL94V-0)

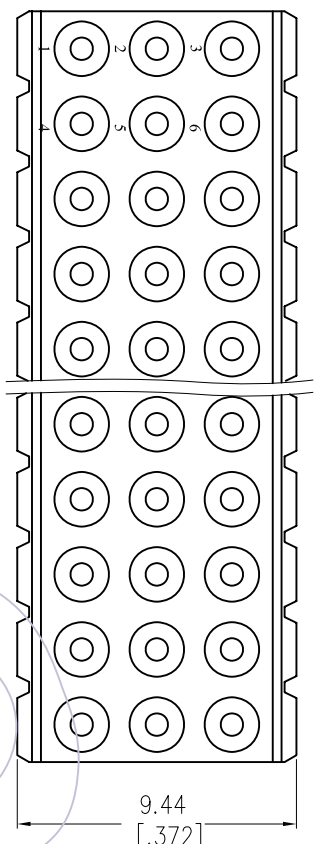

Ordering Information

3511-693 XX S XX 098 X 1

No. of Pins per Row: 02-96Pin

Contact Plating:
 G0=Gold Flash
 G3=10u" Gold
 G4=15u" Gold
 G5=30u" Gold

Packing:
 T=Tube
 A=Tray

OPERATION	±0.40	DRAW	JYHuang	DATE	2012/10/23	SCALE	FIT	PART NO.	3511-693XXSGX098X1
X.XX	±0.25	CHECK		DATE		UNIT	mm	TITLE:	2.54mm MACHINED PIN HEADER
X.XXX	±0.15	APPROVE		DATE		SIZE	A4	THREE ROW 180° H=6.90 L=9.80	
Angle	±.3°	PROU.				SHEET	1/1	Customer NO.	
DIW	TOL					PROU.			
CHANGE									
REV	DATE	MODIFICATION DESCRIPTION							
A0	2012/10/23	NEW							

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)