

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 10mΩ, Max
 Dielectric Strength: Min 1000V/RMS
 Mechanical Life: Min 100 cycles
 Connecting Pin: ø0.46mm
 Operation Temperature: -40°C to +105°C

SContact Material: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)
 06P~18P Insulators without center bar
 20P~28P Insulators with center one bar

Ordering Information

3560-301 XX M XX 090 X 1

Row of Pitch No. of Pin Contact Plating Packing
 l=7.62mm See tab G0=Gold Flash T=Tube
 G3=10u"Gold R=Tap&Reel
 G4=15u"Gold
 G5=30u"Gold

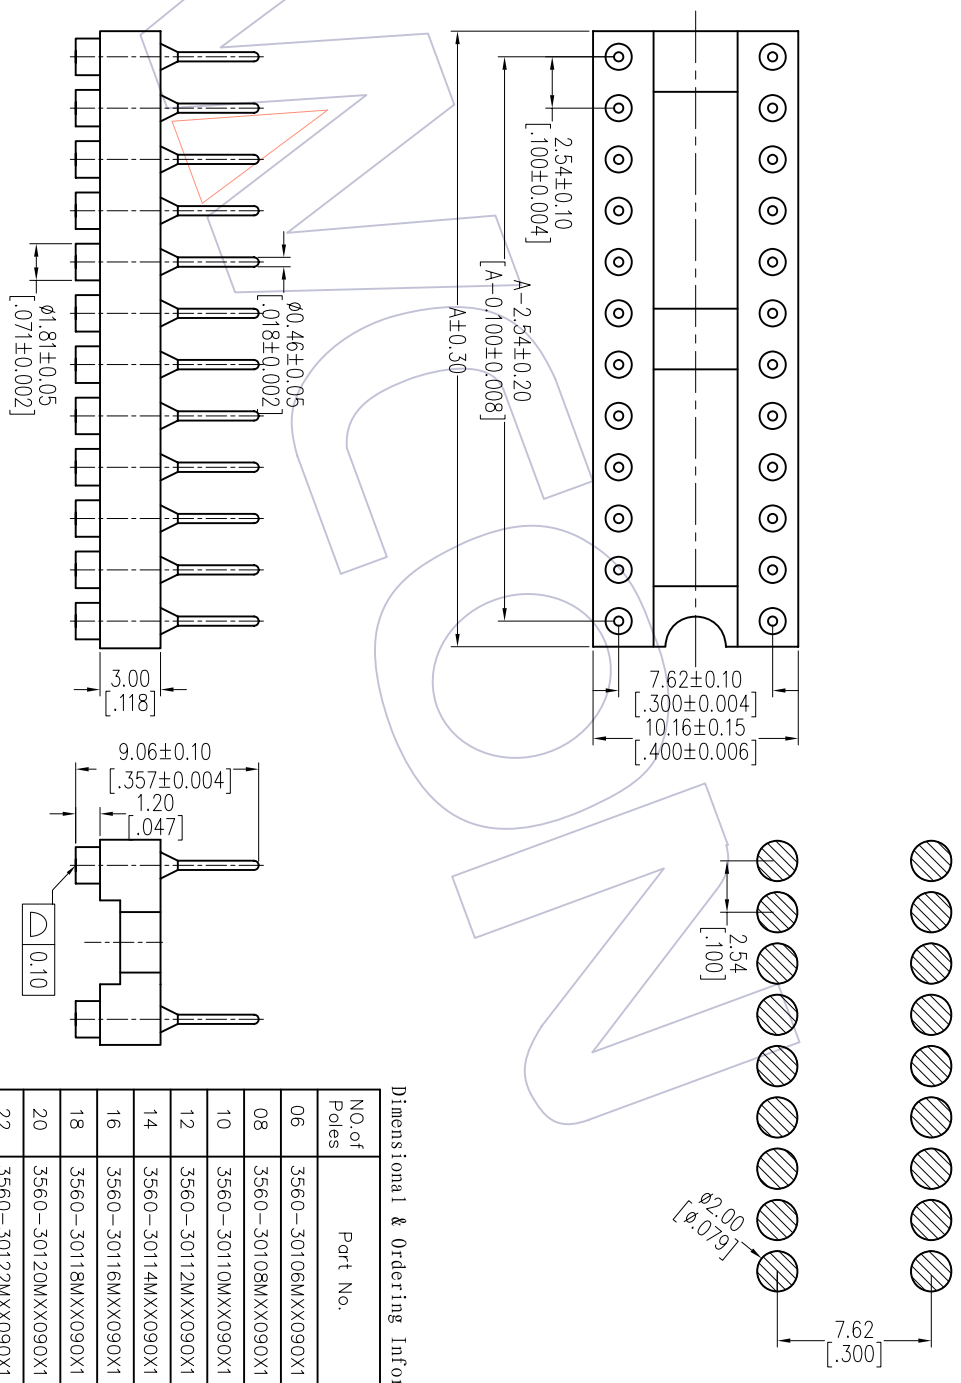

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A
06	3560-30106MXX090X1	7.62
08	3560-30108MXX090X1	10.16
10	3560-30110MXX090X1	12.70
12	3560-30112MXX090X1	15.24
14	3560-30114MXX090X1	17.78
16	3560-30116MXX090X1	20.32
18	3560-30118MXX090X1	22.86
20	3560-30120MXX090X1	25.40
22	3560-30122MXX090X1	27.94
24	3560-30124MXX090X1	30.48
28	3560-30128MXX090X1	35.56

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/11/05	mm		SBE TAB
XX	CHECK	DATE	UNIT		TITLE:
X.XXX			A4		2.54mm MACHINED ADAPTER CONNECTOR
X.XXX			SHEET		SMT H=3.0 L=9.06 Row of Pitch 7.62
Angle	APPROVE	DATE	1/1		Customer NO.
± 3'			PROJ.		
CHANG					
DIM					
TOL					

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/11/05	NEW