


HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

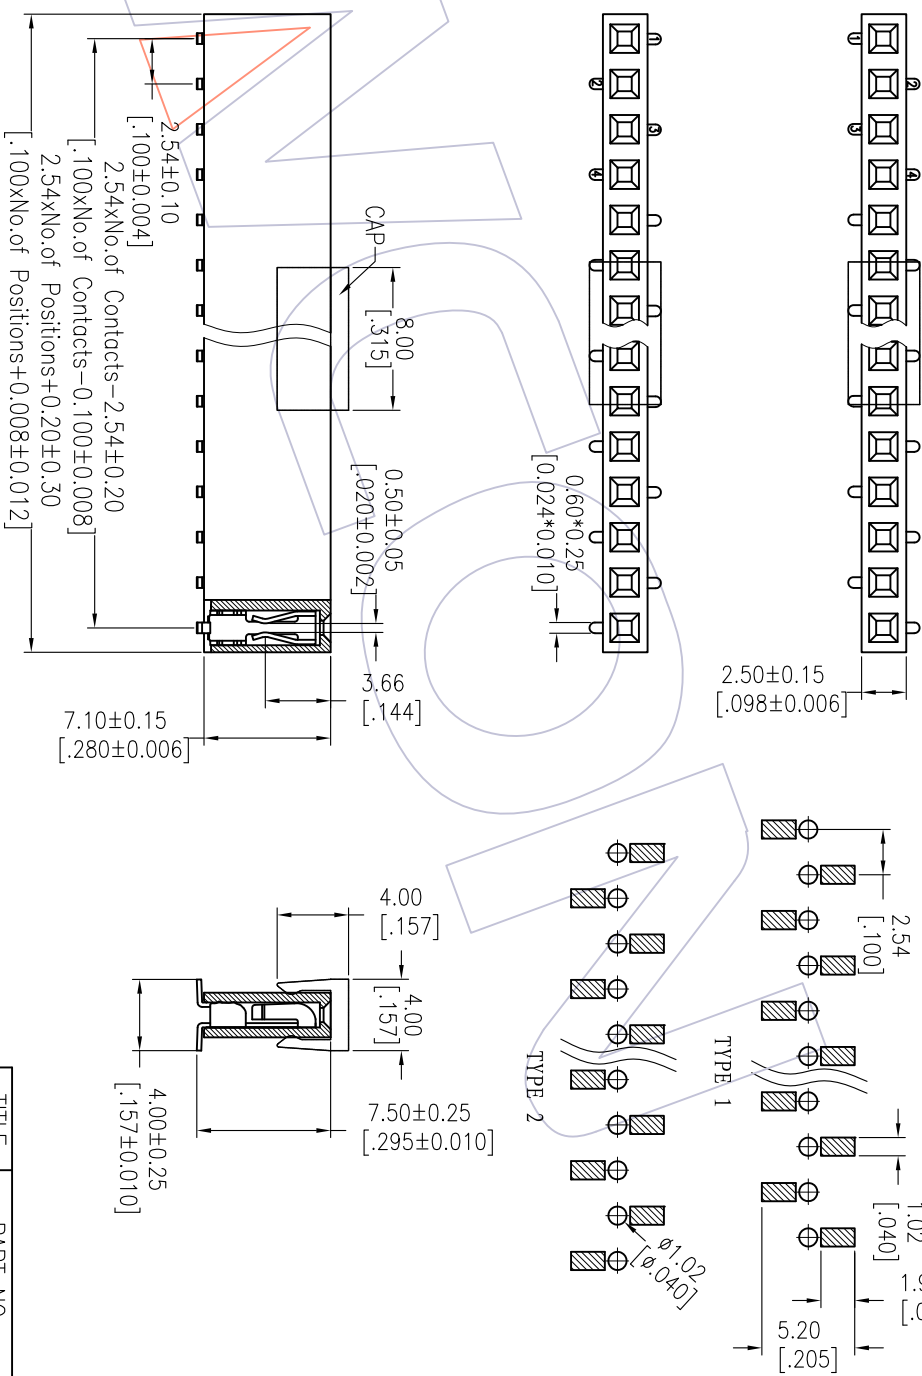

Ordering Information

2171-1 XX M XX CUNT X

No. of Pins per ROW: 02-40PIN
 Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Packing:
 1=TYPE 1
 2=TYPE 2
 T=Tube
 P=Tube+CAP
 R=Tube+Reel+CAP

Series No.

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX		JHuang		2012/08/13		FIT		SBB TABLE	
XX		CHECK		DATE		UNIT		TITLE:	
X.XXX		±0.15		DATE		mm		FH2.54 SINGLE ROW 180° SWT H=7.1	
Angle		± 3'		DATE		SIZE		Customer NO.	
DIM		TOL		APPROVE		SHEET		Customer NO.	
REV		DATE		MODIFICATION DESCRIPTION		PROJ.			
A0		2012/08/13		NEW		1/1			
REV		DATE		MODIFICATION DESCRIPTION		PROJ.			

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com