

HSF

TECHNICAL SPECS:




Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000V/mm
 Mechanical Life: Min 100 cycles
 Mating Pin: φ0.40 to φ0.56mm
 Forces: (polished steel gauge φ0.43mm)
 Insertion: 200g Max/Pin, Withdrawal: 60g Min/Pin
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000), Sn over Ni
 Contact Clip(4 finger): BeCu(C17200), Au or Sn over Ni
 Insulator Material: PPS+ 30%G.F(UL94V-0)
 06P~18P Insulators without center bar
 20P~28P Insulators with center one bar

Ordering Information

7110-301 XX R XX 097 X 1

Row of Pitch No. of Pin Contact Plating Pin Long T=Tube
 l=7.62mm See tab S=Gold Flash/Tin 097=9.7mm A=Tray
 S3=10u"Gold/Tin S4=15u"Gold/Tin SN=Tin
 S5=30u"Gold/Tin

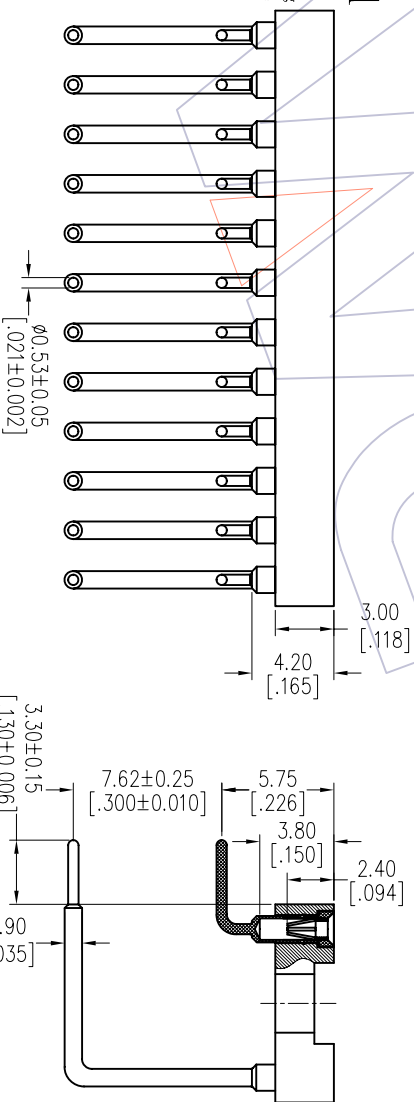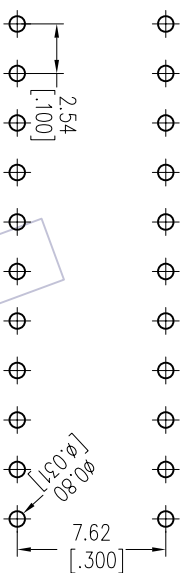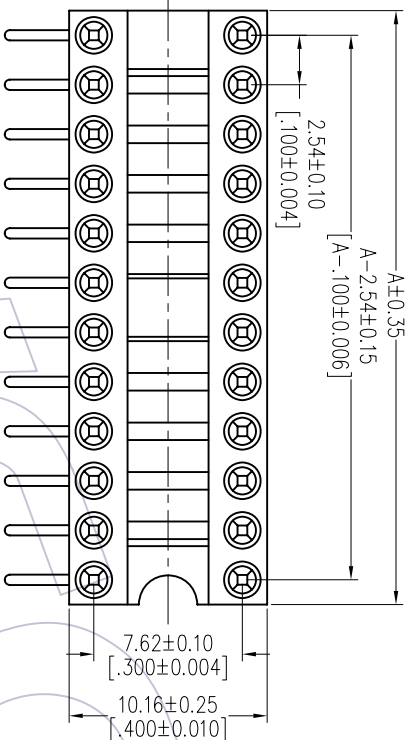

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A
06	7110-30106RXX097X1	7.62
08	7110-30108RXX097X1	10.16
10	7110-30110RXX097X1	12.70
12	7110-30112RXX097X1	15.24
14	7110-30114RXX097X1	17.78
16	7110-30116RXX097X1	20.32
18	7110-30118RXX097X1	22.86
20	7110-30120RXX097X1	25.40
22	7110-30122RXX097X1	27.94
24	7110-30124RXX097X1	30.48
28	7110-30128RXX097X1	35.56

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuogng	2012/11/02	UNIT	mm	7110-301XXRXX097X1
XX	CHECK	DATE	SIZE	A4	TITLE: IC SOCKET 90° H=3.0 Row of Pitch 7.62mm
Angle	APPROVE	DATE	SHEET	1/1	Customer NO.
± 3'	PROJ.				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/11/02	NEW	