



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:


- Current Rating: 1.0AMP
- Contact Resistance: 10mΩ, Max
- Withstand Voltage: 1000V AC/DC
- Mechanical Life: Min 100 cycles
- Connecting Pin: ∅0.47mm
- Operation Temperature: -40°C to+105°C

Contact Material: Brass CuZn36Pb3(C36000)
Contact plating: Au over Ni
Insulator Material: PPS+30%G.F UL94V-0
06P~18P Insulators without center bar
20P~28P Insulators with center one bar

Ordering Information

3560-301 XX S XX 100 X 1

Row of Pin No. of Pin Contact Plating Packing
i=7.62mm See tab G0=Gold Flash T=Tube
G3=10ur"Gold G4=15ur"Gold A=Tray
G5=30ur"Gold

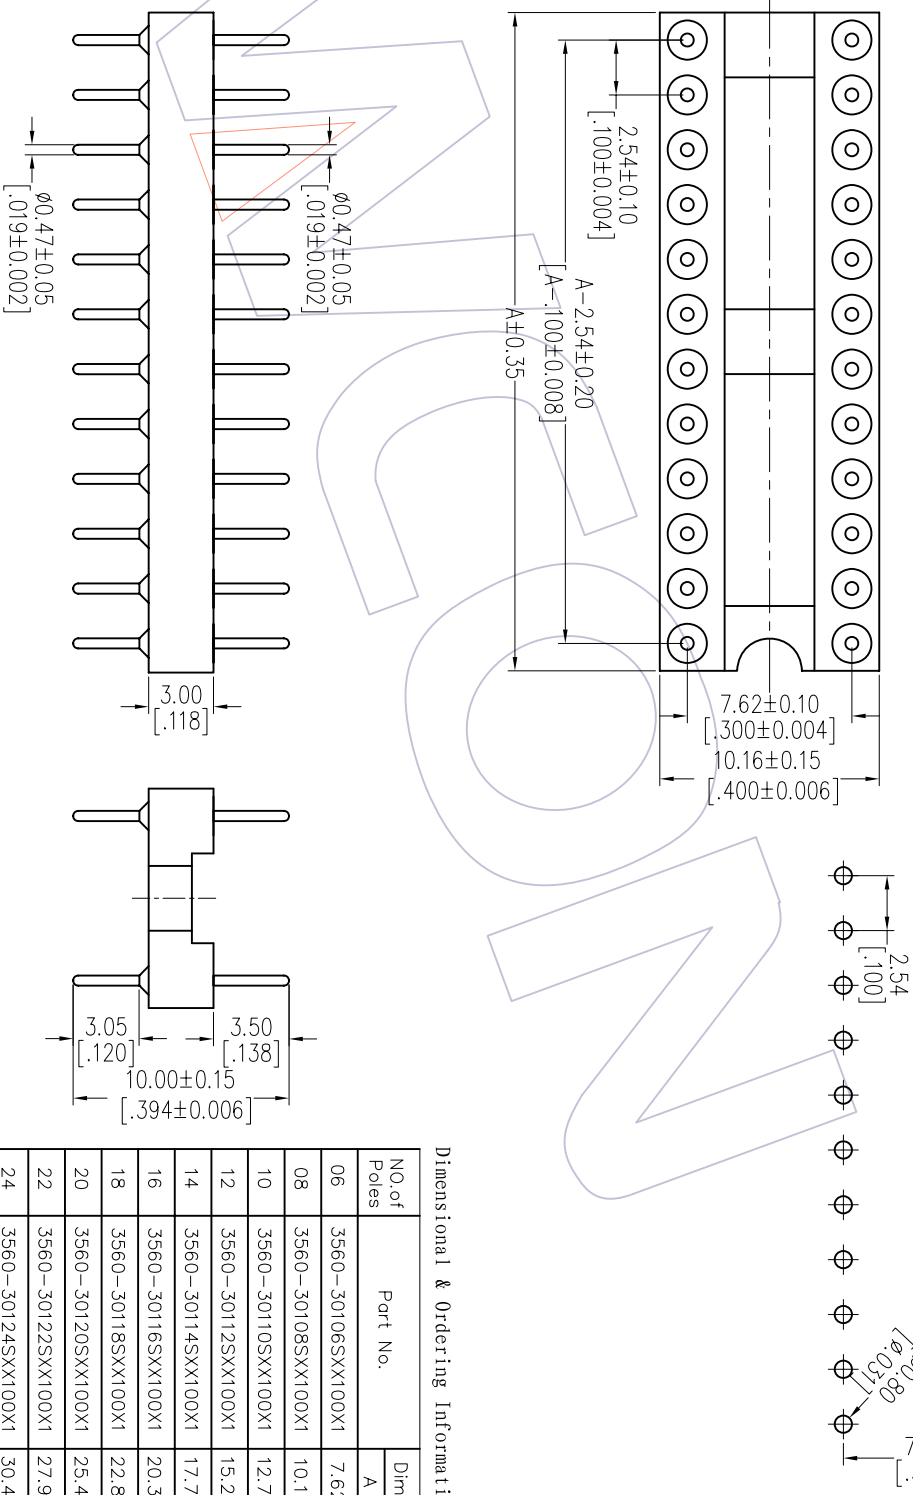

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A
06	3560-30106SXX100X1	7.62
08	3560-30108SXX100X1	10.16
10	3560-30110SXX100X1	12.70
12	3560-30112SXX100X1	15.24
14	3560-30114SXX100X1	17.78
16	3560-30116SXX100X1	20.32
18	3560-30118SXX100X1	22.86
20	3560-30120SXX100X1	25.40
22	3560-30122SXX100X1	27.94
24	3560-30124SXX100X1	30.48
28	3560-30128SXX100X1	35.56



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/11/05	UNIT	mm	SBB TAB
XX	CHECK	DATE	SIZE	A4	TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=10.0 Row of Pitch7.62
XXXX	±0.15	ANGLE	± 3°	SHEET	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL
A0	2012/11/05	NEW			