

HSF

TECHNICAL SPECS:



Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 100 cycles
 Connecting Pin: Ø0.47mm
 Operation Temperature: -40°C to +105°C

Contact Material: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F(U194V-0)
 06P~18P Insulators without center bar
 20P~28P Insulators with center one bar

Ordering Information

3560-301 XX S XX XXX X 1

Row of Pitch 1=7.62mm See tab
 No. of Pin Contact Plating
 G0=Gold Flash 124=12.4mm Pin Long Packing
 G3=10u"Gold 146=14.6mm T=Tube
 G4=15u"Gold 215=21.5mm A=Tray
 G5=30u"Gold 274=27.4mm
 336=33.6mm

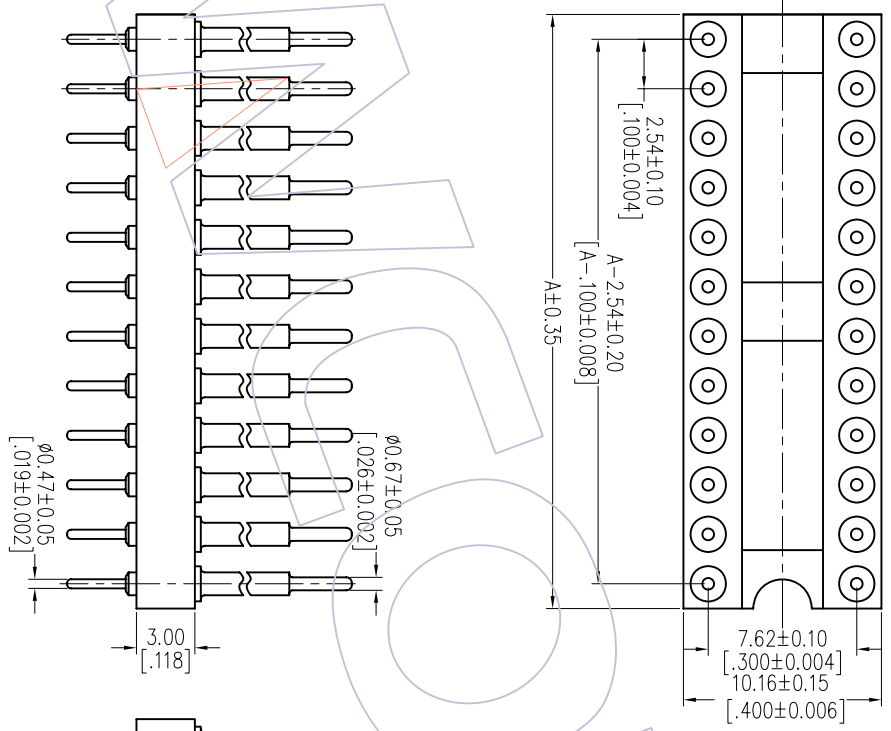


Pin Long Code: XXX	Dim L"	Pin Long Code: XXX	Dim L"
124	6.20	274	21.20
146	8.40	336	27.40
215	15.30		

Dimensional & Ordering Information

NO of Poles	Part No.	Dim A
06	3560-30106SXXXXXXXX1	7.62
08	3560-30108SXXXXXXXX1	10.16
10	3560-30110SXXXXXXXX1	12.70
12	3560-30112SXXXXXXXX1	15.24
14	3560-30114SXXXXXXXX1	17.78
16	3560-30116SXXXXXXXX1	20.32
18	3560-30118SXXXXXXXX1	22.86
20	3560-30120SXXXXXXXX1	25.40
22	3560-30122SXXXXXXXX1	27.94
24	3560-30124SXXXXXXXX1	30.48
28	3560-30128SXXXXXXXX1	35.56

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

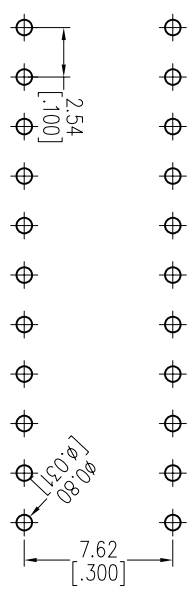

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	SEE TAB
XX	JYHuang	2012/11/05	UNIT	mm		
XX	CHECK	DATE	SIZE	A4	TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 Row of Pitch 7.62	
XX	APPROVE	DATE	SHEET	1/1	Customer NO.	
Angle	± 3'		PROJ.			
DIW	TOL					
CHANGE						
REV	DATE	MODIFICATION DESCRIPTION				
A0	2012/11/05	NEW				

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 WCON-Kunshan Fax: +86 512 57468468
 WCON-Dongguan Fax: +86 769 85358915
 WCON-Dongguan E-mail: sales@wcon.com
 WCON-Kunshan E-mail: sales@wcon.com