



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:


- Current Rating: 1.0AMP
- Contact Resistance: 10mΩ, Max
- Dielectric Strength: Min 1000V/RMS
- Mechanical Life: Min 100 cycles
- Connecting Pin: φ0.46mm
- Operation Temperature: -40°C to +105°C

Contact Material: Brass CuZn36Pb3(C36000)
Contact plating: Au over Ni
Insulator Material: PPS+30%G.F(UL94V-0)
24P~32P Insulators with center one bar
36P~48P Insulators with center two bar

Ordering Information

3560-302 XX M XX 090 X 1

Row of Pitch No. of Pin Contact Plating Packing
2=15.24mm See tab G0=Gold Flash T=Tube
G3=10u"Gold G4=15u"Gold R=Tap&Reel
G5=30u"Gold

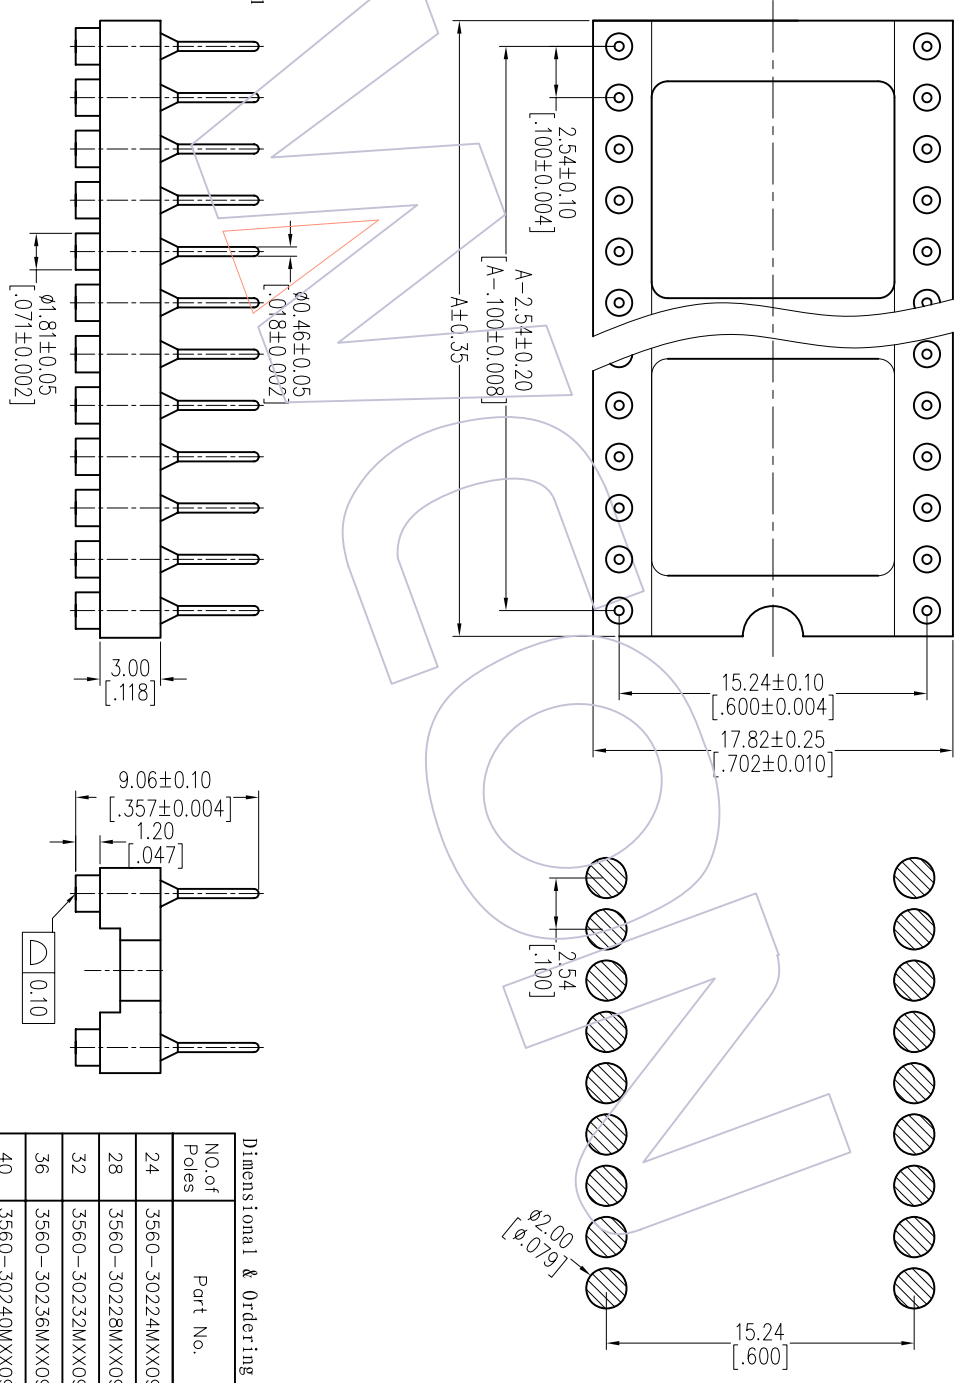

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim	
		A	
24	3560-30224MXX090X1	30.48	
28	3560-30228MXX090X1	35.56	
32	3560-30232MXX090X1	40.64	
36	3560-30236MXX090X1	45.72	
40	3560-30240MXX090X1	50.80	
42	3560-30242MXX090X1	53.34	
48	3560-30248MXX090X1	60.96	



Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYhuang	2012/11/05	UNIT	mm	SBE TAB
XX	CHECK	DATE	SIZE	A4	TITLE: 2.54mm MACHINED ADAPTER CONNECTOR SMT H=3.0 L=9.06 Row of Pitch 15.24
X XXX	Angle	± 3°	SHEET	1/1	Customer NO.
X XXX	± 0.15		PROJ.		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL
A0	2012/11/05	NEW			