

HSF

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 10mΩ, Max
 Withstand Voltage: 1000V AC/DC
 Mechanical Life: Min 100 cycles
 Connecting Pin: φ0.50mm
 Operation Temperature: -40°C to +105°C

Contact Material: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F UL94V-0
 24P~32P Insulators with center one bar
 36P~48P Insulators with center two bar

Ordering Information

3560-302_XX M XX 102 X 1

Row of Pitch No. of Pin Contact Plating Packing
 2=15.24mm See tab G0=Gold Flash T=Tube
 G3=10u"Gold R=Tube&Reel
 G4=15u"Gold
 G5=30u"Gold

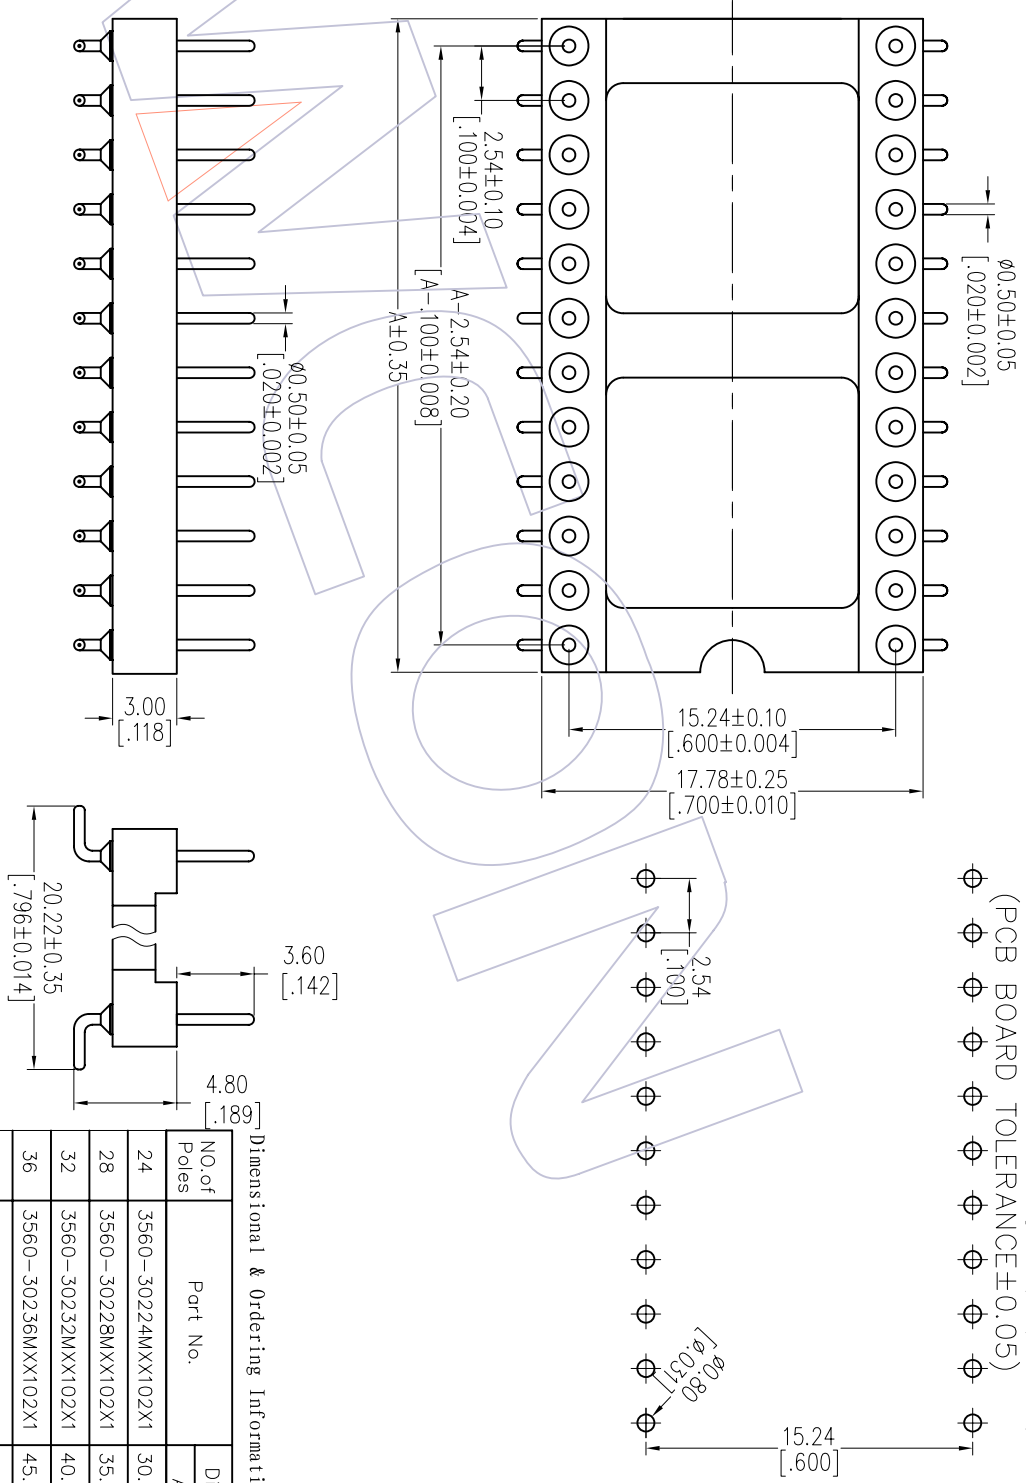

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim	
		A	
24	3560-30224MXX102X1	30.48	
28	3560-30228MXX102X1	35.56	
32	3560-30232MXX102X1	40.64	
36	3560-30236MXX102X1	45.72	
40	3560-30240MXX102X1	50.80	
42	3560-30242MXX102X1	53.34	
48	3560-30248MXX102X1	60.96	

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	SEE TAB	
XX	JYHuog	2012/11/05	UNIT	mm			
XX	CHECK	DATE	SIZE	A4	TITLE: MACHINED ADAPTER CONNECTOR		
X.XXX	±0.15	DATE	SHEET	1/1	SMT L=3.0 L=10.20 Row of Pitch: 15.24		
Angle	± 3'	DATE	PROJ.		Customer NO.		
MODIFICATION DESCRIPTION	CHANGE	DATE	APPROVE				
REV	DATE	DESCRIPTION	APPROVE				
A0	2012/11/05	NEW					
<p>WCON-Dongguon http://www.wcon.com WCON-Kunshan</p> <p>Tel: +86 769 85358920 Tel: +86 512 57468408</p> <p>Fax: +86 769 85358915 Fax: +86 512 57468468</p> <p>E-mail: sales@wcon.com E-mail: sales@wcon.com</p>							