

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:


- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze Or Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information

2185 - 2 XX M XX C U N X 1

- No. of Pins per ROW: 02-40PIN
- Contact Plating:
G0=Gold Flash
G3=10μ"Gold
G4=15μ"Gold
G5=30μ"Gold
S0=Gold Flash/Tin
S3=10μ"Gold/Tin
S4=15μ"Gold/Tin
S5=30μ"Gold/Tin
SN=Tin
SM=Matte Tin
- Packing:
T=Tube
P=Tube+CAP
R=Tube+Reel+CAP

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

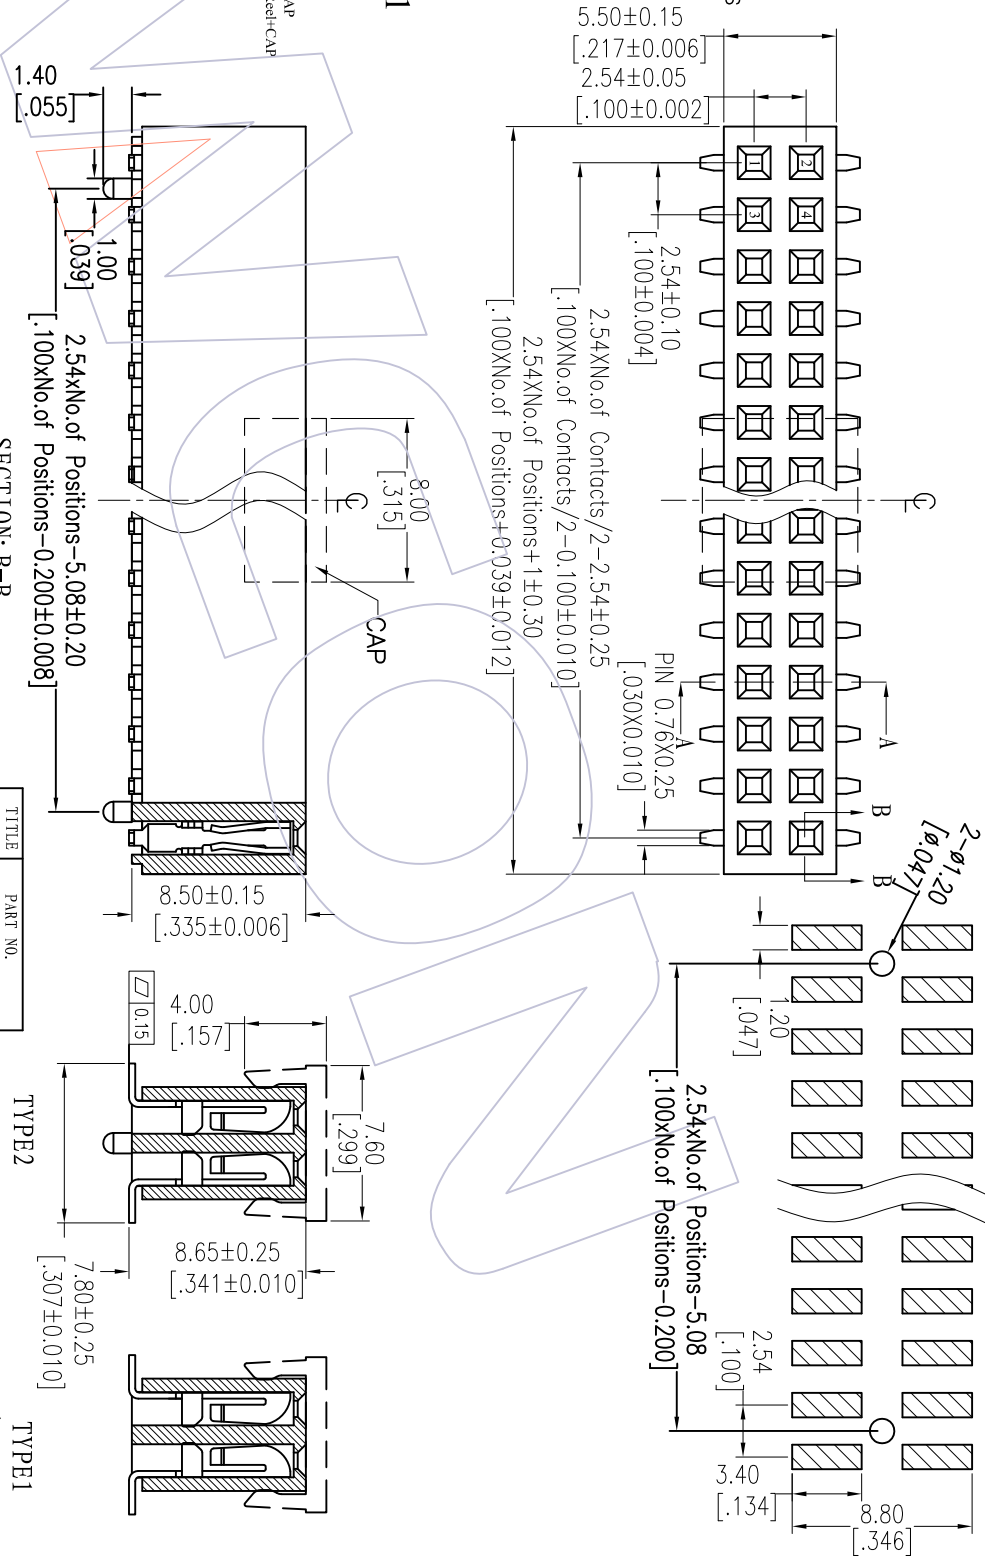

TITLE	PART NO.
TYPE 1	2185-2XXMXXCUNX1
TYPE 2	2185-2XXMXXCUNX2

SECTION: B-B

TYPE2
WITH POST

TYPE1
W/O POST

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE	SHEET	PROJ.	CUSTOMER NO.
A1	2014/11/27	Modify drawing	-----	X.XX	±0.40	Wang	2014/11/27	A4		
A0	2012/08/15	NEW	-----	X.XXX	±0.15	CHECK		1/1		
OPERATION	SCALE	DATE	DATE	UNIT	FIT	PART NO.	SBE TABLE	TITLE: PH2, 5.4mm DUAL ROW 180° SMT H=8.50		
DRAW	Wang	2014/11/27		mm				Customer NO.		
CHECK								WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com		
APPROVE								WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com		

WCON

Http: www.wcon.com