

HSF

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 10mΩ, Max
 Withstand Voltage: 1000V AC/DC
 Mechanical Life: Min 100 cycles
 Connecting Pin: $\phi 0.60$ mm
 Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F UL94V-0
 24P~32P Insulators with center one bar
 36P~48P Insulators with center two bar

Ordering Information

3560-302 XX S XX 119 X 1

Row of Pitch No. of Pin Contact Plating Packing
 2=15.24mm See tab G0=Gold Flash T=Tube
 G3=10u"Gold A=Tray
 G4=15u"Gold
 G5=30u"Gold

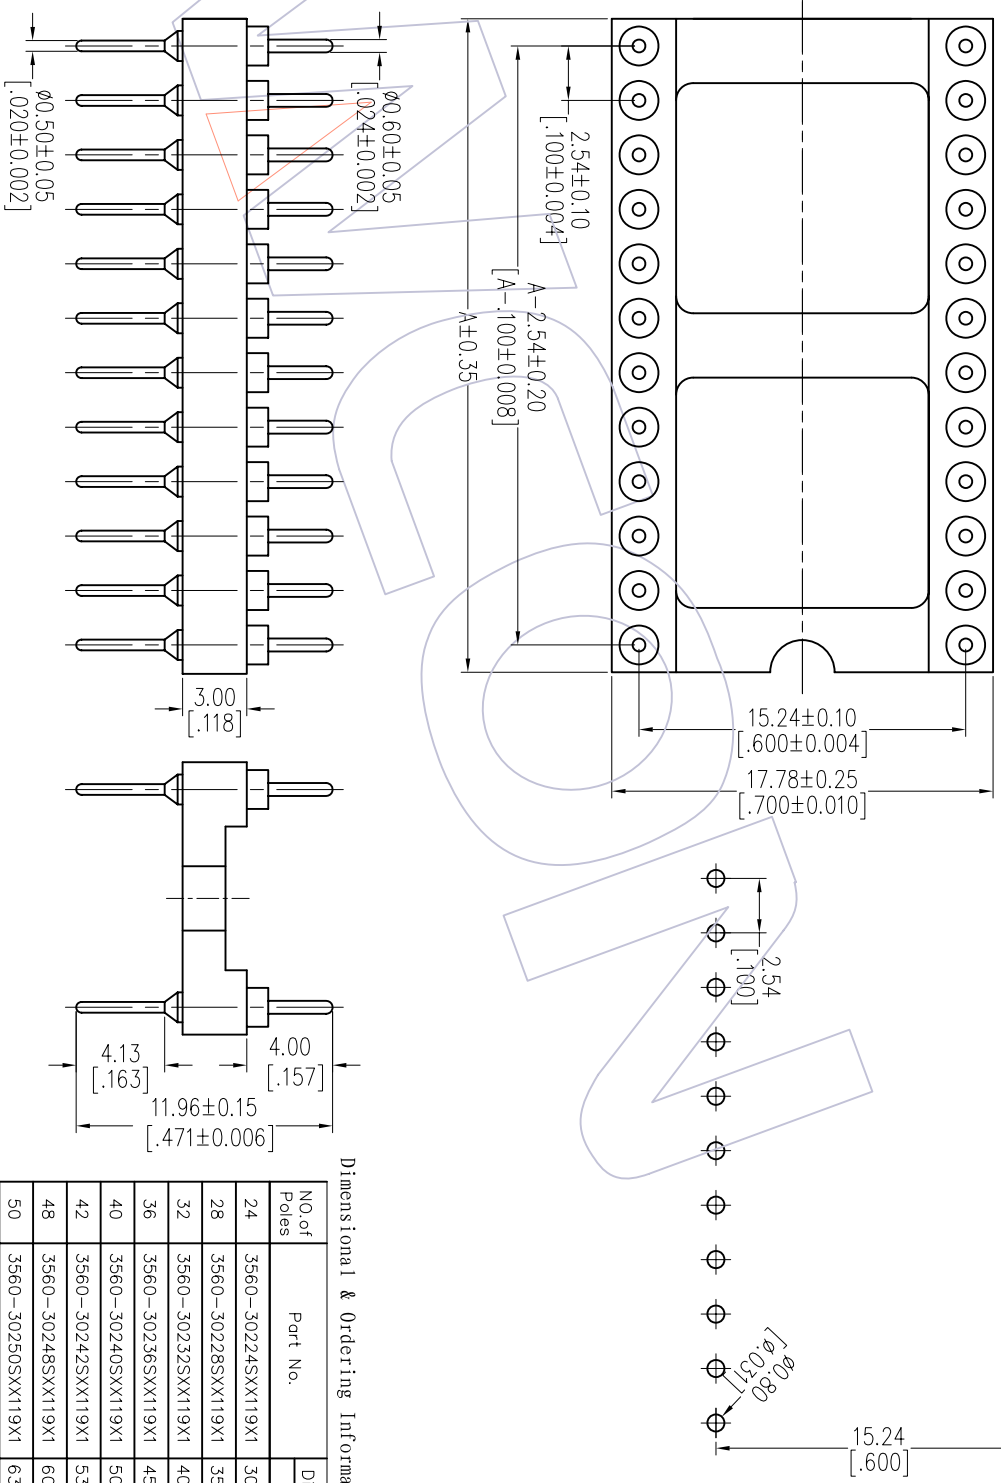

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A
24	3560-30224SXX119X1	30.48
28	3560-30228SXX119X1	35.56
32	3560-30232SXX119X1	40.64
36	3560-30236SXX119X1	45.72
40	3560-30240SXX119X1	50.80
42	3560-30242SXX119X1	53.34
48	3560-30248SXX119X1	60.96
50	3560-30250SXX119X1	63.50
52	3560-30252SXX119X1	66.04

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 WCON-Fox: +86 769 85358915
 WCON-Fox: +86 512 57468468
 WCON-E-mail: sales@wcon.com
 WCON-E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/11/05	mm		SBE TAB
XX	CHECK	DATE	A4		TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=1.96 Row of Pitch 15.24
XXXX	±0.15	DATE	1/1		Customer NO.
Angle	± 3'	DATE	PROJ.		
CHANG	DIM	TOL			
REV	DATE	MODIFICATION DESCRIPTION			
A0	2012/11/05	NEW			