

HSF

NOTES:


- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0

Ordering Information



2185B-1XXSXXCUNX1

- No. of Pins per ROW: 02-40PIN
- Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
- S0=Gold Flash/Tin, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=30μ"Gold/Tin
- SN=Tin, SM=Wave Tin
- Packing: T=Tube, A=Tray

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

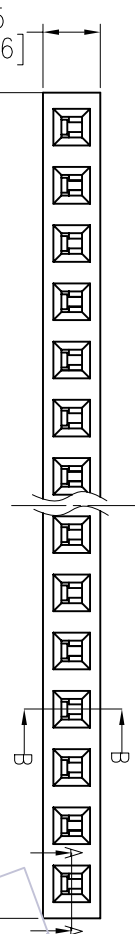

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

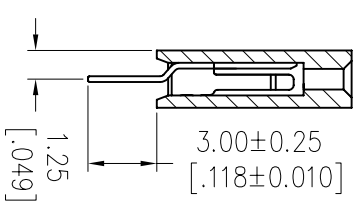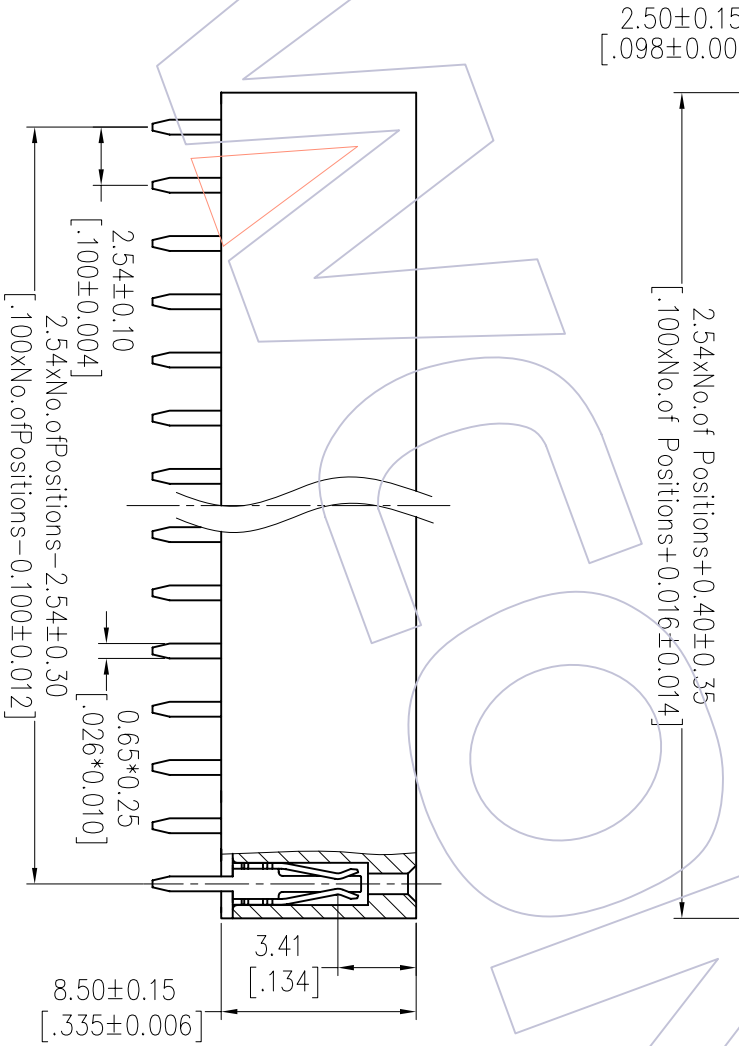

SECTION A-A

OPERATION		DRAW		DATE		SCALE		PART NO.	
X.X		JYHuong		2012/08/16		FIT		2185B-1XXSXXCUNX1	
X.XX		CHECK		DATE		UNIT		TITLE:	
X.XXX		X.XXX		± 3'		mm		FH2.54 SINGLE ROW 180° DIP	
Angle		APPROVE		DATE		SIZE		H=8.50 B TYPE	
± 3'		DATE		DATE		A4		Customer NO.	
TOL		DATE		DATE		SHEET		Customer NO.	
± 3'		DATE		DATE		1/1		Customer NO.	
TOL		DATE		DATE		PROJ.		Customer NO.	
TOL		DATE		DATE		PROJ.		Customer NO.	

WCON

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com