

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 10mΩ, Max
 Dielectric Strength: Min 1000V/RMS
 Mechanical Life: Min 100 cycles
 Connecting Pin: $\phi 0.46$ mm
 Operation Temperature: -40°C to +105°C


Contact Material: Brass CuZn36Pb3(C36000)
 Contact plating: Au over Ni
 Insulator Material: PPS+30%G.F(UL94V-0)

Ordering Information

3560-303 XX M XX 090 X 1

Row of Pitch No. of Pin Contact Plating
 3=10.16mm See tab G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold

Packing
 T=Tube
 R=Tray&Reel

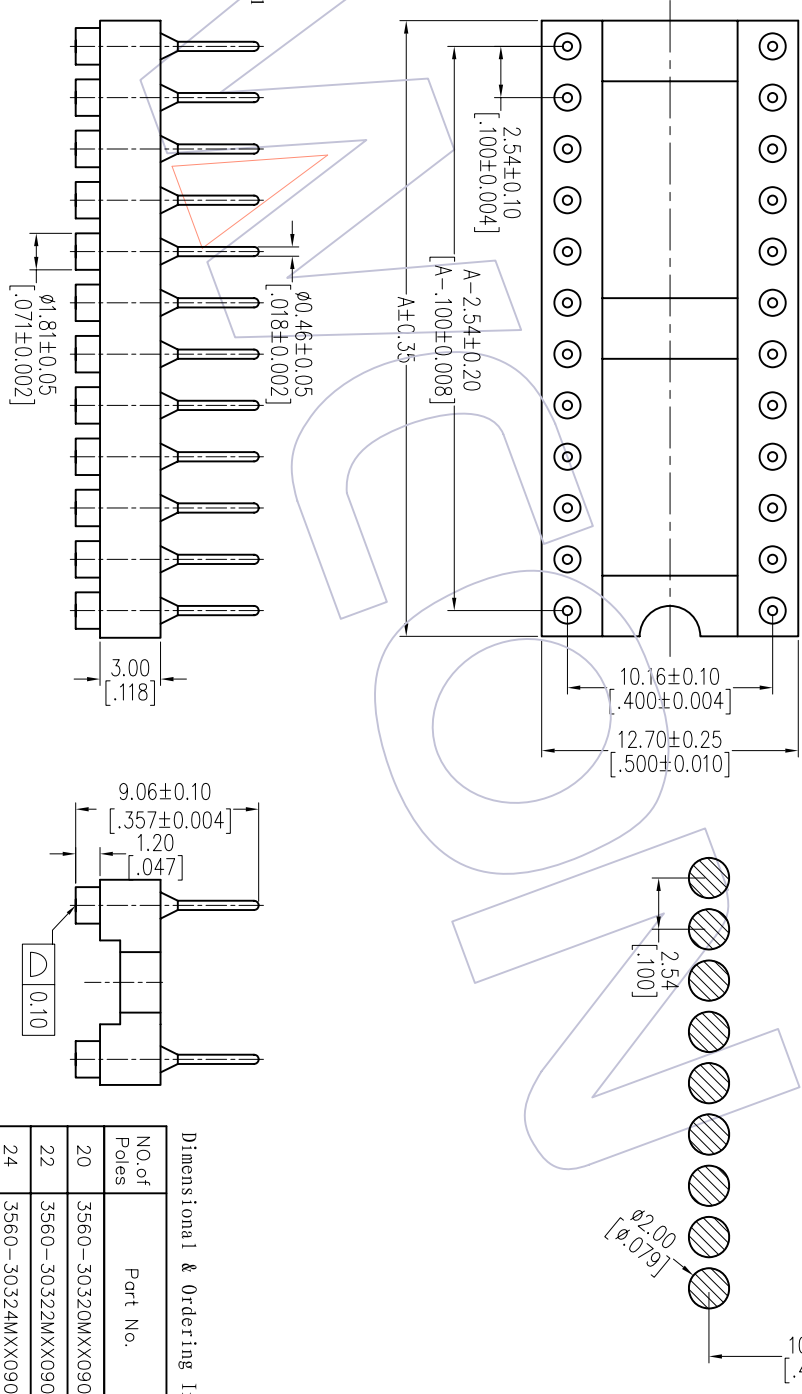

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A
20	3560-30320MXX090X1	25.40
22	3560-30322MXX090X1	27.94
24	3560-30324MXX090X1	30.48
28	3560-30328MXX090X1	35.56
32	3560-30332MXX090X1	40.64

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Tel: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2012/11/05	mm		SBE TAB
XX	CHECK	DATE	UNIT		TITLE:
X.XXX	±0.15		A4		2.54mm MACHINED ADAPTER CONNECTOR
Angle	± 3'	DATE	SHEET		SMT H=3.0 L=9.06 Row of Pitch 10.16
DIM	TOL	APPROVE	1/1		Customer NO.
CHANGE			PROJ.		

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/11/05	NEW