HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 10mΩ Max
Withstand Voltage: 1000V AC/DC
Mechanical Life: Min 100 cycles
Connecting Pin: ø0.47mm
Operation Temperature: −40°C to+105°C

Contact Material: Brass CuZn36Pb3(C36000)
Contact plating: Au over Ni
Insulator Material: PPS+30%G.F UL94V−0

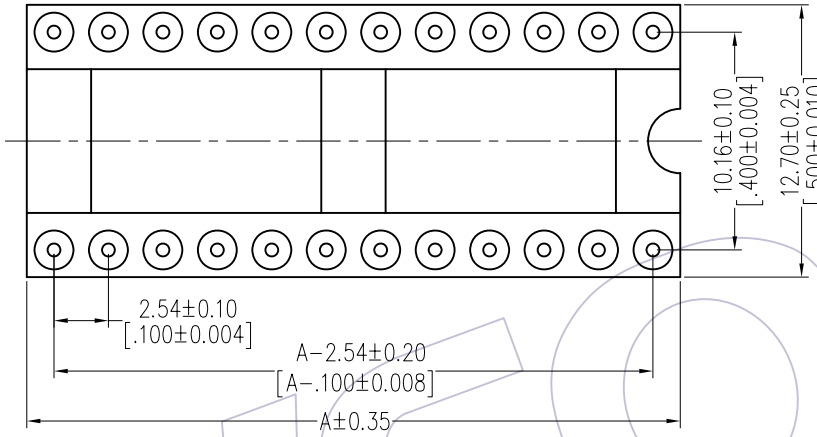

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

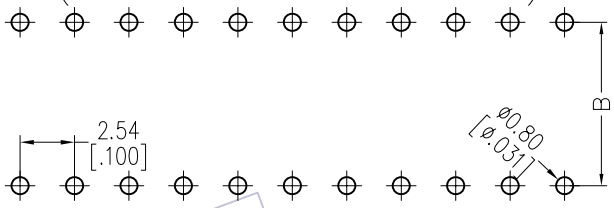

Ordering Information

3560-303 XX S XX 100 X 1

- Row of Pitch: 3=10.16mm
- No. of Pin: See tab
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Packing: T=Tube, A=Tray

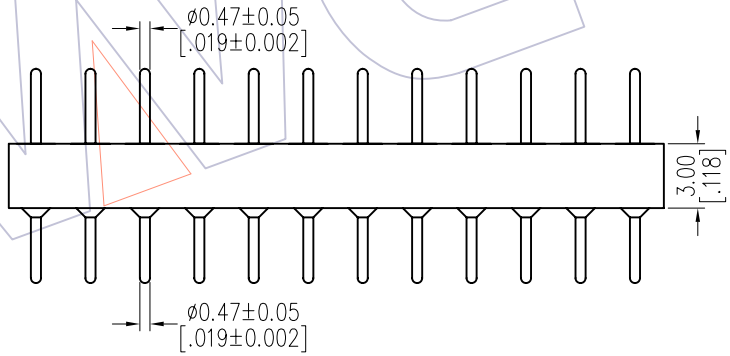

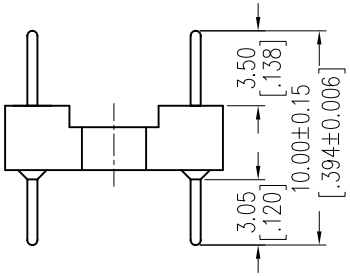

Dimensional & Ordering Information

NO.of Poles	Part No.	Dim A
20	3560−30320SXX100X1	25.40
22	3560−30322SXX100X1	27.94
24	3560−30324SXX100X1	30.48
28	3560−30328SXX100X1	35.56
32	3560−30332SXX100X1	40.64

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/11/05	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/11/05
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. SEE TAB

TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=10.0 Row of Pitch 10.16

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com