


# HSF

**NOTES:**

Current Rating: 1.0AMP  
 Contact Resistance: 10mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Mechanical Life: Min 100 cycles  
 Connecting Pin: ∅0.60mm  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass CuZn36Pb3(C36000)  
 Contact plating: Au over Ni  
 Insulator Material: PPS+30%G.F UL94V-0


Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

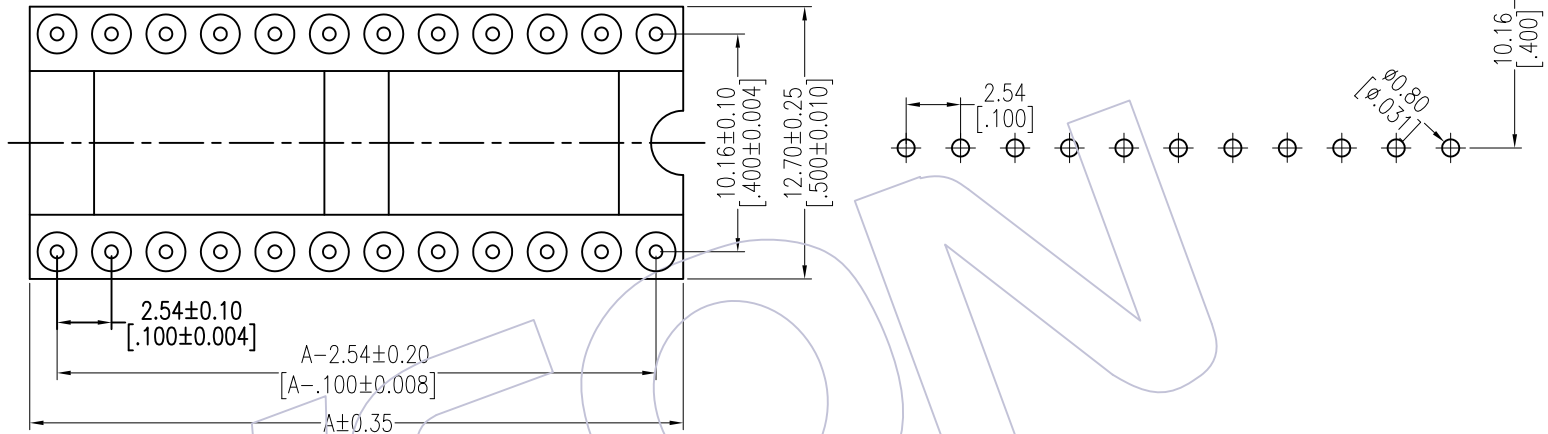

## Ordering Information

3560-303 XX S XX 119 X 1

Row of Pitch: 3=10.16mm  
 No. of Pin: See tab  
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold  
 Packing: T=Tube, A=Tray

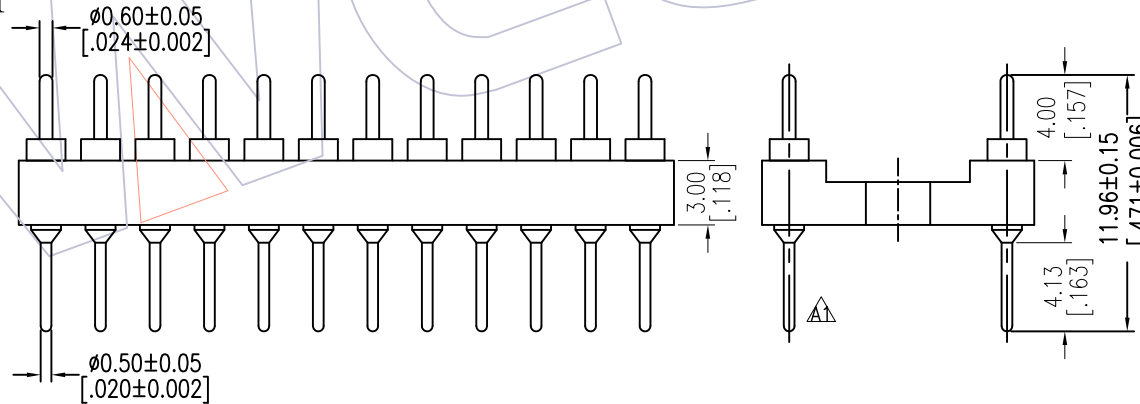

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim
		A
20	3560-30320SXX119X1	25.40
22	3560-30322SXX119X1	27.94
24	3560-30324SXX119X1	30.48
28	3560-30328SXX119X1	35.56
32	3560-30332SXX119X1	40.64

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
x.x ±0.40	Ding	2017/05/22	UNIT	mm	SEE TAB
x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=10.0 Row of Pitch 10.16
Angle ± 3'			PROJ.		Customer NO.
DIM TOL					

**WCON**  
 Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: salesks@wcon.com