

HSF

TECHNICAL SPECS:


Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000V/RMS
 Mechanical Life: Min 100 cycles
 Connecting Pin: ϕ :0.64mm
 Operation Temperature: -40°C to +105%°C

Contact: Brass CuZn36Pb3(C36000)
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.(UL94V-0)

Ordering Information

3560-303 XX S XX 122 X 1

Row of Pitch No. of Pin Contact Plating Packing
 3=10.16mm See tab G0=Gold Flash T=Tube
 G3=10u"Gold A=Tray
 G4=15u"Gold
 G5=30u"Gold

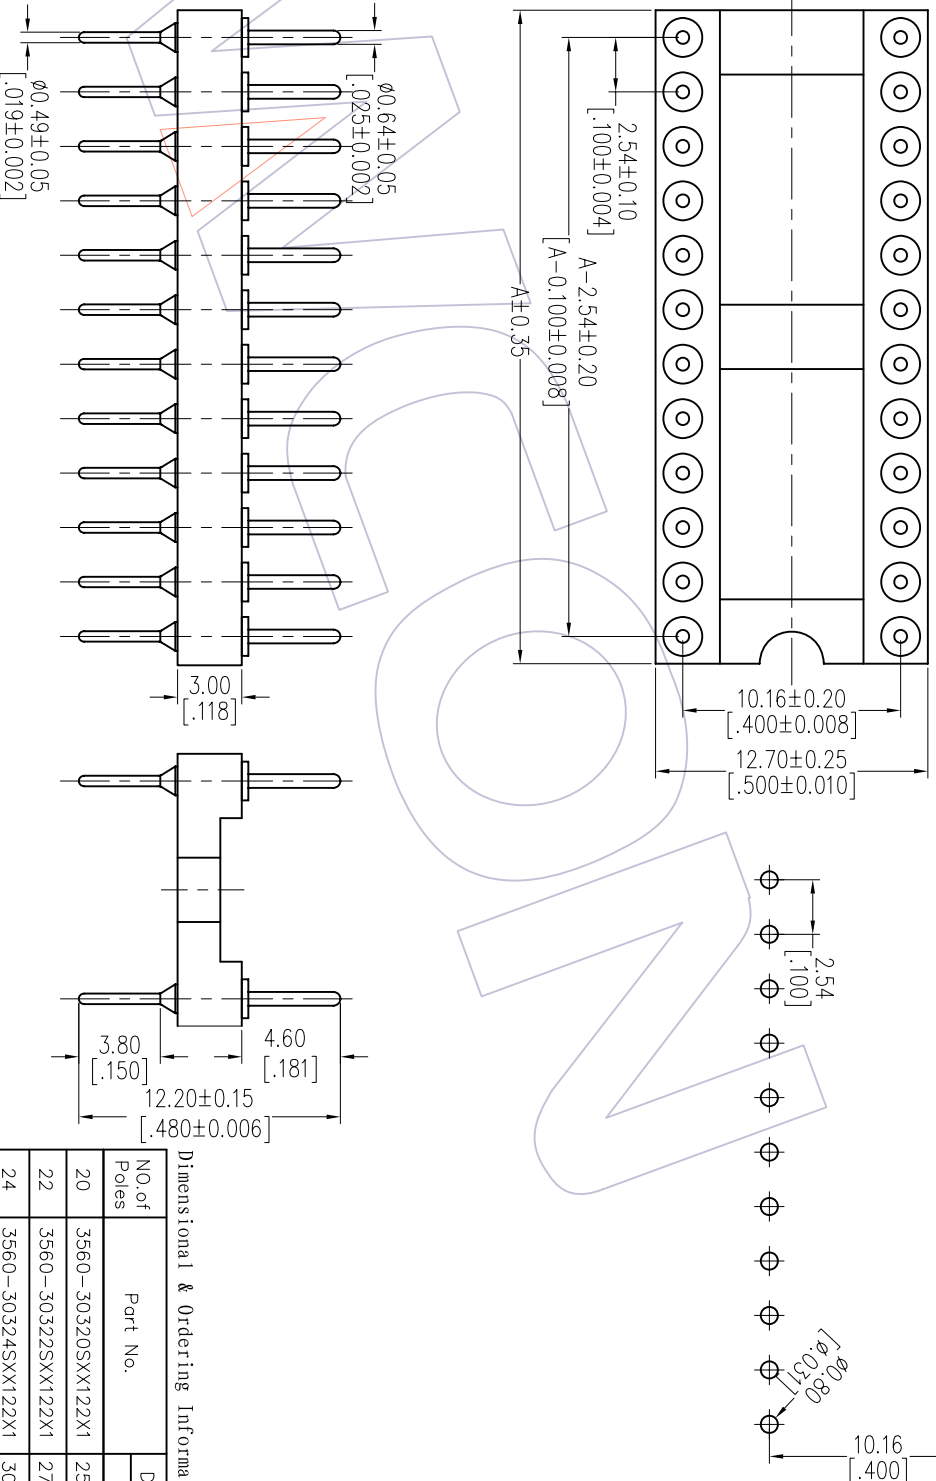

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE \pm 0.05)

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A
20	3560-30320SXX122X1	25.40
22	3560-30322SXX122X1	27.94
24	3560-30324SXX122X1	30.48
28	3560-30328SXX122X1	35.56
32	3560-30332SXX122X1	40.64

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

OPERATION	SCALE	DRAW	DATE	FIT	PART NO.
XX \pm 0.40	mm	JYHuang	2012/11/05	A4	SEE TAB
XX \pm 0.25	mm	CHECK	DATE	1/1	TITLE: MACHINED ADAPTER CONNECTOR 2.54mm 180° H=3.0 L=12.2 Row of Pitch 10.16
Angle \pm 3°	TOL	APPROVE	DATE	PROJ.	Customer NO.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE DIM
A0	2012/11/05	NEW	