HSF

TECHNICAL SPECS:
Current Rating: 1.0AMP
Contact Resistance: 10mΩ Max
Dielectric Strength: Min 1000VRMS
Mechanical Life: Min 100 cycles
Connecting Pin: ø0.60mm
Operation Temperature: −40°C to+105°C

Contact Material: Brass CuZn36Pb3(C36000)
Contact plating: Au over Ni
Insulator Material: PPS+30%G.F(UL94V−0)

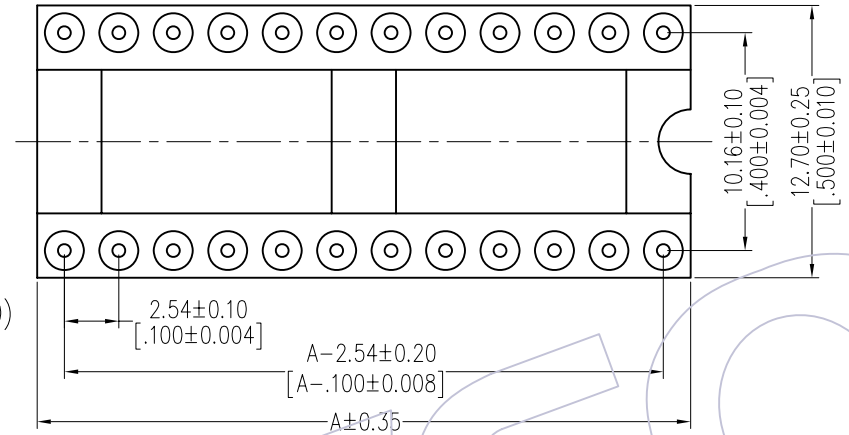

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

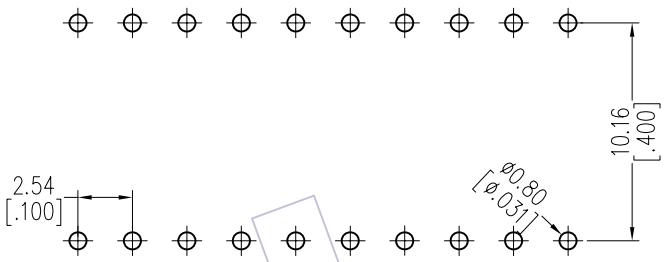

Ordering Information

3560-303 XX S XX 137 X 1

- Row of Pitch: 3=10.16mm
- No. of Pin: See tab
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- Packing: T=Tube, A=Tray

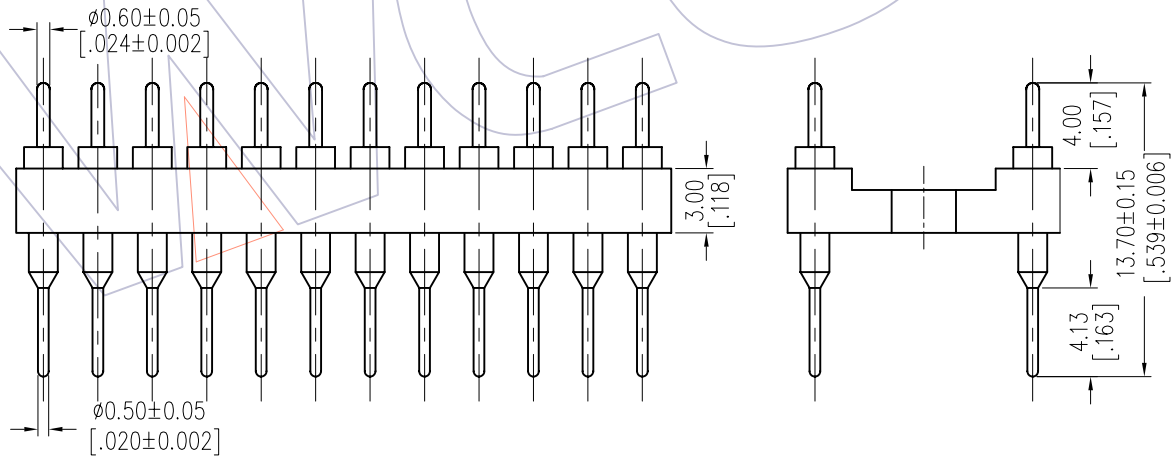

Dimensional & Ordering Information

Poles	Part No.	Dim A
20	3560−30320SXX137X1	25.40
22	3560−30322SXX137X1	27.94
24	3560−30324SXX137X1	30.48
28	3560−30328SXX137X1	35.56
32	3560−30332SXX137X1	40.64

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/11/05	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/11/05
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. SEE TAB

TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=13.7 Row of Pitch 10.16

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com