

HSF

TECHNICAL SPECS:





Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 100 cycles
 Mating Pin: Ø0.40 to Ø0.56mm
 Forces: (polished steel gauge Ø0.43mm)
 Insertion: 200g Max/Pin, Withdrawal: 60g Min/Pin
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000), Sn over Ni
 Contact Clip(4 finger): BeCu(C17200), Au or Sn over Ni
 Insulator Material: PPS+30%G.F(Ul94V-0)

Ordering Information

7110-303 XX S XX XXX X 1

Row of Pitch 3=10.16mm See tab
 No. of Pin Contact Plating
 Pin Long
 Packing
 S0=Gold Flash/Tin 992=9.2mm T=Tube
 S3=10u"Gold/Tin 102=10.2mm A=Tray
 S4=15u"Gold/Tin 112=11.2mm
 S5=30u"Gold/Tin 122=12.2mm
 SN=Thin 132=13.2mm
 142=14.2mm
 152=15.2mm
 162=16.2mm
 182=18.2mm
 212=21.2mm
 252=25.2mm
 362=36.2mm

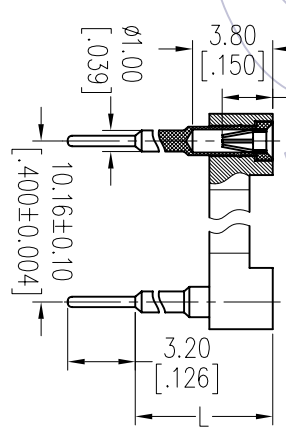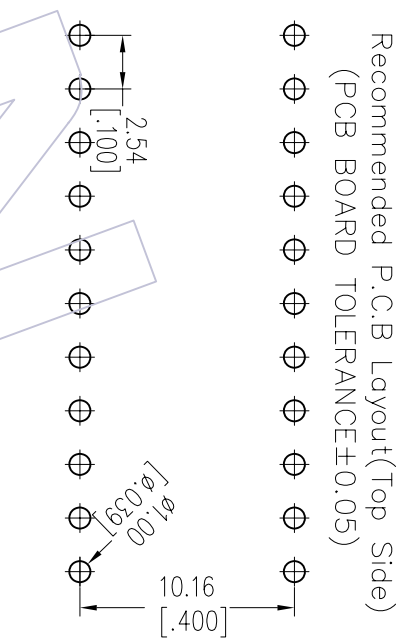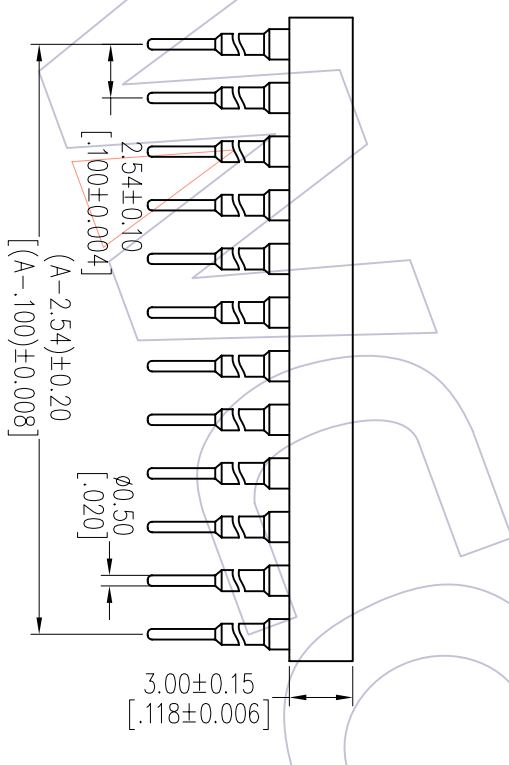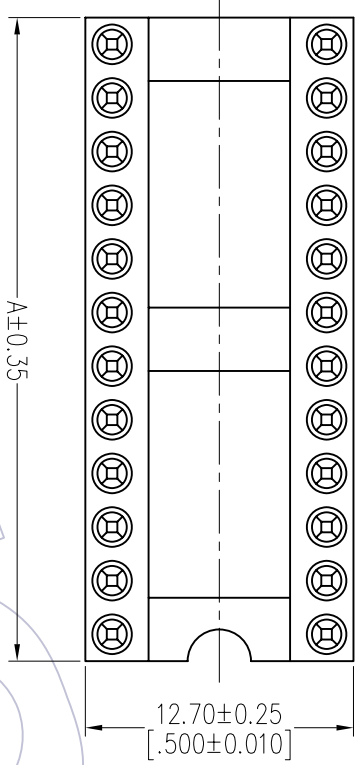

Dimensional & Ordering Information

NO. of Poles	Part No.	Dim A	Pin Long Code: XXX	Dim "L" Code: XXX	Pin Long Code: XXX	Dim "L" Code: XXX
20	7110-30320SXXXXXX1	25.40	092	6.0	152	12.0
22	7110-30322SXXXXXX1	27.94	102	7.0	162	13.0
24	7110-30324SXXXXXX1	30.48	112	8.0	182	15.0
28	7110-30328SXXXXXX1	35.56	122	9.0	212	18.0
32	7110-30332SXXXXXX1	40.64	132	10.0	252	22.0
			142	11.0	362	33.0

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX ±0.40	JYHuang	2012/11/02	mm	A4	SEE TABLE
X.XX ±0.25	CHECK	DATE	SIZE	SHEET	TITLE: 2.54mm IC SOCKET 180° H=3.0 Row of Pitch 10.16
X.XXX ±0.15			1/1	PROJ.	Customer NO.
Angle ± 3'	APPROVE	DATE			
DIM TOL					
CHANGE					
MODIFICATION DESCRIPTION					
DATE					
REV					