HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 10mΩ Max
Withstand Voltage: 1000V AC/DC
Mechanical Life: Min 100 cycles
Connecting Pin: ø0.47mm
Operation Temperature: −40°C to+105°C

Contact Material: Brass CuZn36Pb3(C36000)
Contact plating: Au over Ni
Insulator Material: PPS+30%G.F UL94V−0

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

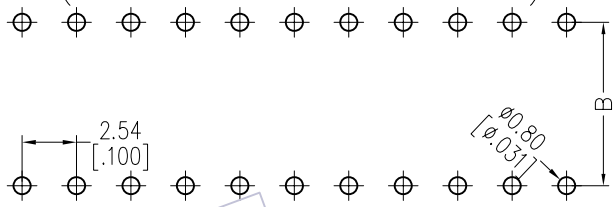

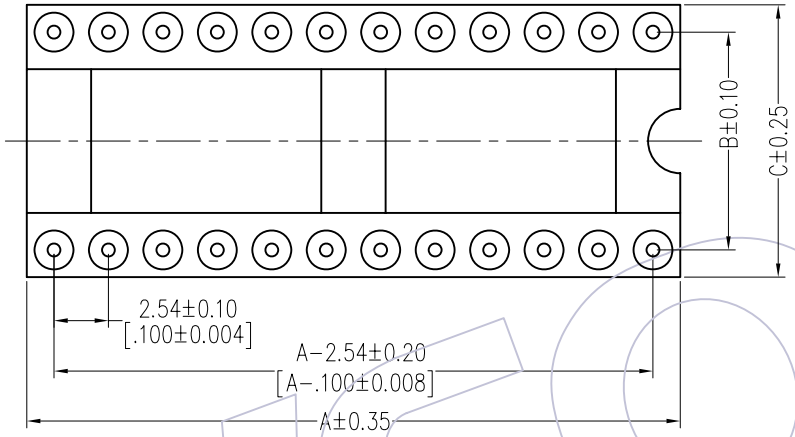

Ordering Information

3560-305 XX S XX 100 X 1

Row of Pitch	No. of Pin	Contact Plating	Packing
5=22.86mm	See tab	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold	T=Tube A=Tray

Dimensional & Ordering Information

NO.of Poles	Part No.	Dimension		
		A	B	C
50	3560−30550SXX100X1	63.50	22.86	25.40
52	3560−30552SXX100X1	66.04	22.86	25.40
64	3560−30564SXX100X1	81.28	22.86	25.40

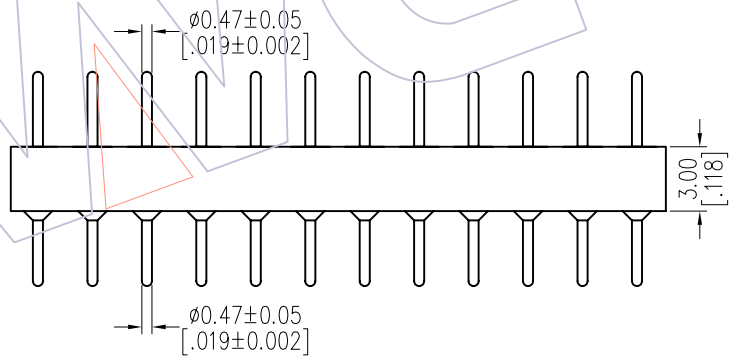

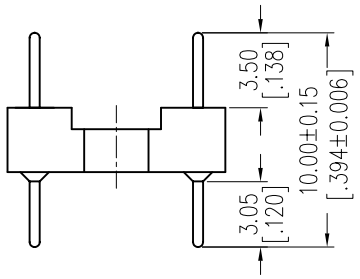

WCON

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/11/05	NEW	------

OPERATION		DRAW	DATE	SCALE	FIT
X.X	±0.40	JYHuang	2012/11/05	UNIT	mm
X.XX	±0.25	CHECK	DATE	SIZE	A4
X.XXX	±0.15			SHEET	1/1
Angle	± 3°	APPROVE	DATE	PROJ.	
DIM	TOL				

PART NO.
SEE TAB

TITLE:
2.54mm MACHINED ADAPTER CONNECTOR
180° H=3.0 L=10.0 Row of Pitch 22.86

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com