

HSF

NOTES:




- Current Rating: 3.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze Or Brass
- Contact plating: Au Or Sn over Ni
- Insulator Material: PA9T+30%G.F UL94V-0(Std)
Or PBT+30%G.F UL94V-0

Ordering Information

2185 - 1 XX R XX X Y N X X

No. of Pins per ROW: 02-40PIN
 Contact Plating: G0=Gold Flash G1=10μ"Gold G2=15μ"Gold G3=30μ"Gold G4=15μ"Gold G5=30μ"Gold
 Insulator: A=PBT T=Tube C=PA9T A=Tray
 Packaging: S0=Gold Flash/Tin S3=10μ"Gold/Tin S4=15μ"Gold/Tin S5=30μ"Gold/Tin SN=Tin SM=Matte Tin

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

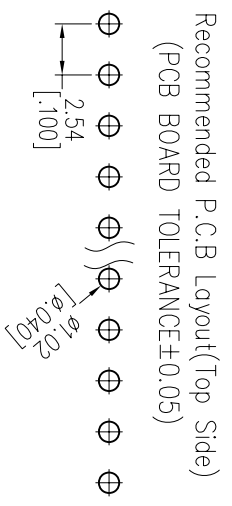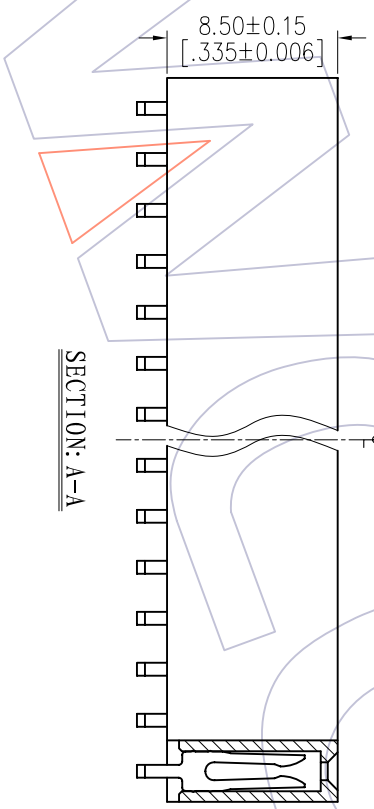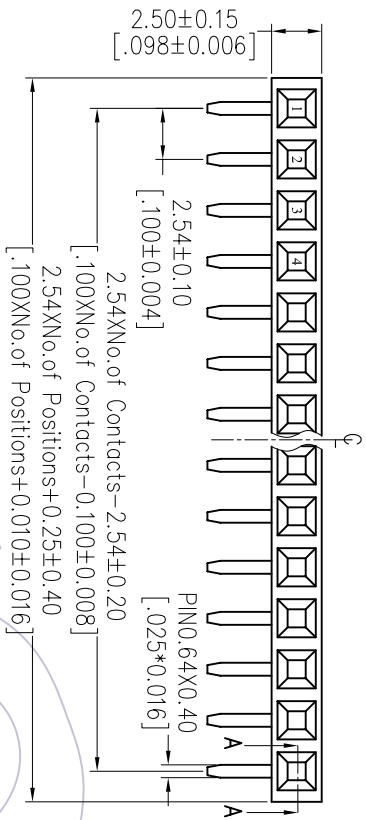

REV	DATE	MODIFICATION DESCRIPTION
A0	2012/08/15	NEW

OPERATION	±0.40	DRAW	JYHuang	DATE	2012/08/15	SCALE	FIT	PART NO.	2185-1XXXXXXNXX
X.XX	±0.25	CHECK		DATE		UNIT	mm	TITLE:	FIG. 54 SINGLE ROW 90° DIP H=8.5
X.XXX	±0.15	APPROVE		DATE		SIZE	A4	SHEET	1/1
Angle	± 3°	DIM		PROJ.		CUSTOMER NO.			

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
---	--