

HSF

TECHNICAL SPECS:


Current Rating: 1.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 100 cycles
 Connecting Pin: ∅0.64mm
 Operation Temperature: -40°C to +105°C

Contact: Brass CuZn36Pb3(C36000)
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%GF(UL94V-0)


Ordering Information

3560-305 XX S XX 122 X 1

Row of Pitch No. of Pin Contact Plating Packing
 5=22.80mm See tab G0=Gold Flash T=Tube
 G3=10u"Gold A=Tray
 G4=1.5u"Gold
 G5=30u"Gold

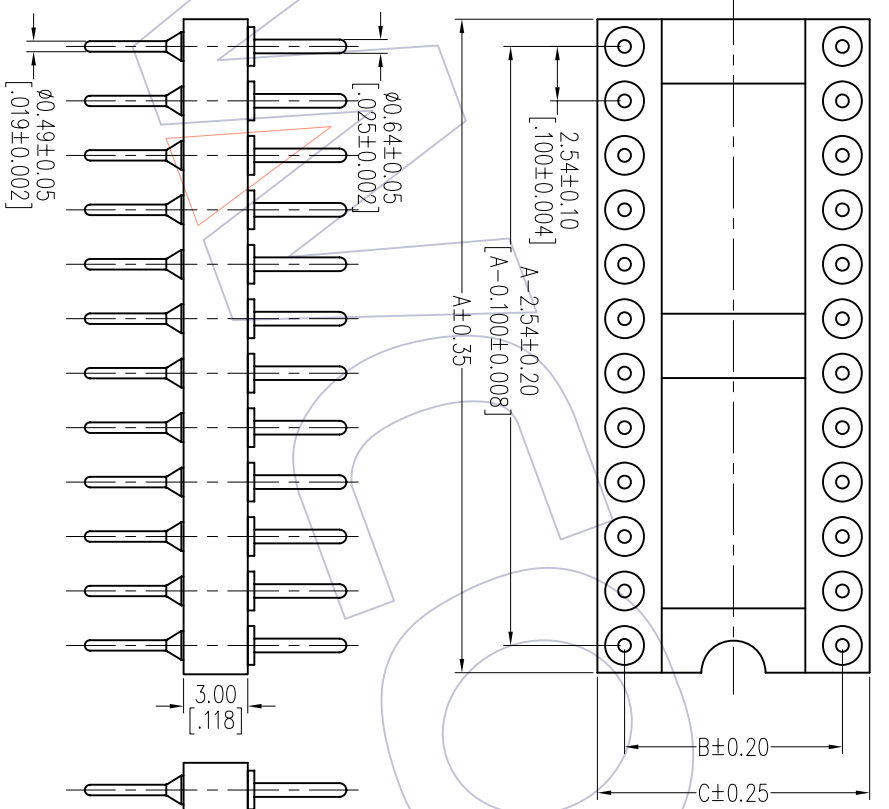

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)



Dimensional & Ordering Information

NO. of Poles	Part No.	Dimension		
		A	B	C
50	3560-30505SX122X1	63.50	22.86	25.40
52	3560-30552SX122X1	66.04	22.86	25.40
64	3560-30564SX122X1	81.28	22.86	25.40

OPERATION	SCALE	PART NO.	TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=12.2 Row of Pitch 22.86
DRAW	FIT	SEE TAB	
DATE	UNIT	DATE	
2012/11/05	mm	2012/11/05	
CHECK	SIZE	CHECK	
JYHuog	A4	DATE	
DATE	SHEET	DATE	
2012/11/05	1/1	DATE	
NEW	PROJ.	DATE	
MODIFICATION DESCRIPTION	CHANGE	DATE	
DATE	DIW	DATE	
2012/11/05	Angle	DATE	
DATE	± 3'	DATE	
DATE	TOL	DATE	
DATE		DATE	

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com