


HSE

NOTES:

Rated Current: 1.75AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 5000MΩ min
 Operation Temperature: -55°C to +125°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: CP+30%GF UL94V-0

Recommended P. C. B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

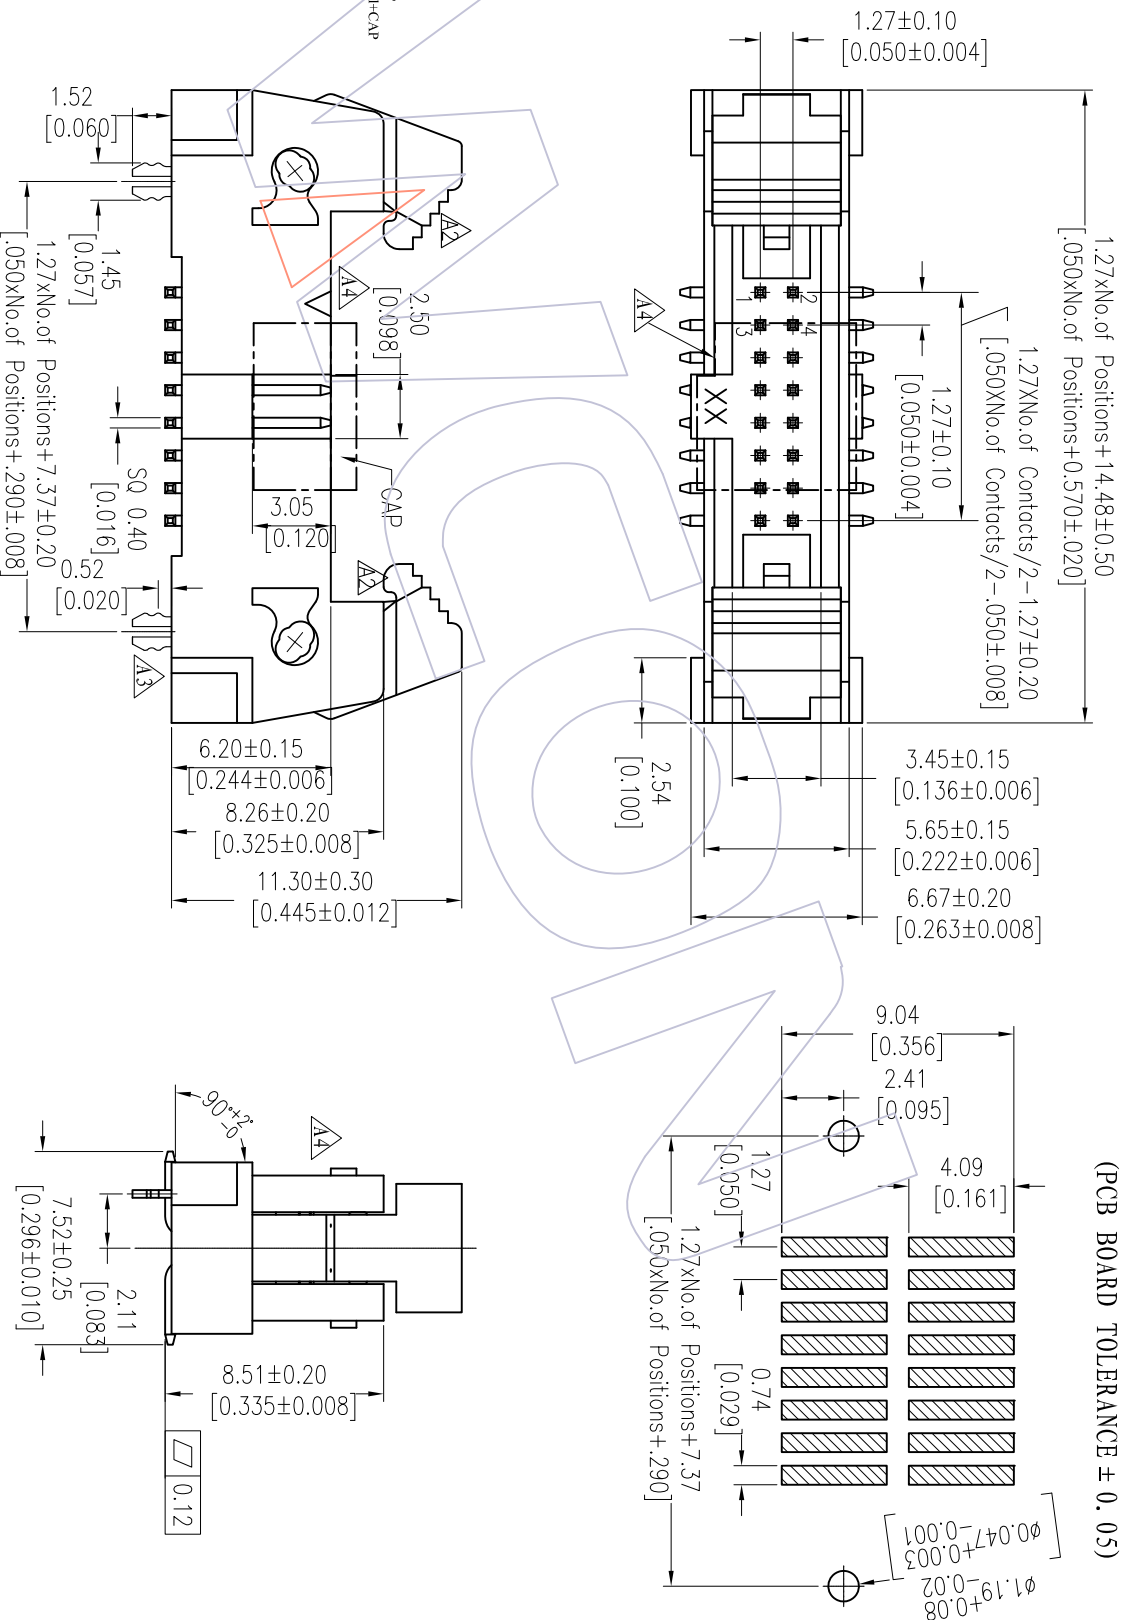

Ordering Information

3231-XX M XX B S T 2

- No. of Pins: 06, 26, 08, 30, 10, 34, 14, 40, 16, 44, 20, 50, 24
- Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=50μ"Gold, S3=10μ"Gold/Tin, S4=15μ"Gold/Tin, S5=50μ"Gold/Tin, SN=Tin
- Insulator Color: B=Black
- Packing: T=Tube, P=Tube+CAP, R=Tube+Reel+CAP

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A3	2012/08/31	Modify CAP	△4	XX	△4	2012/08/31	mm	A4	3231-XXMXXBST2	1.27 Ejector Header	Tel: +86 769 85358920	Tel: +86 512 57468408
A3	2012/05/30	Modify drawing		XX	△4		inch	A4		"S" Type SMT With fork	Fax: +86 769 85358915	Fax: +86 512 57468468
A2	2010/08/09	Modify drawing		XXX	CHECK							
A0	2009/11/21	NEW		XXXX	APPROVE							
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
				XX	△4		mm	A4	3231-XXMXXBST2	1.27 Ejector Header	Tel: +86 769 85358920	Tel: +86 512 57468408
				XXX	CHECK		inch	A4		"S" Type SMT With fork	Fax: +86 769 85358915	Fax: +86 512 57468468
				XXXX	APPROVE							
				Angle								
				± 3'								
				TOL								

WCON

Http: www.wcon.com
 WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com