HSF

NOTES:
Current Rating: 1.75AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 5000MΩ Min
Operation Temperature: −55℃ to +125℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:LCP+30%G.F UL94V-0

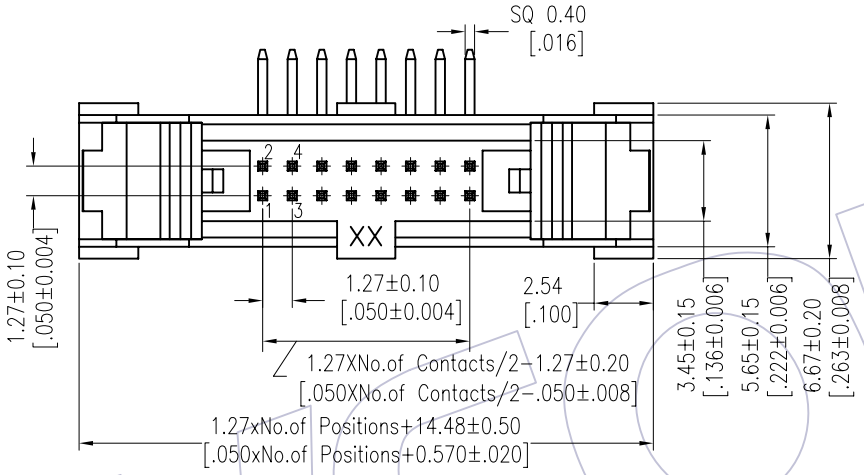

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)



Ordering Information

3231-XX R XX B S T 1

No.of Pins	Contact Plating	Insulator Color	Packing
06 26 08 30 10 34 14 40 16 44 20 50 24	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin	B=Black	T=Tube

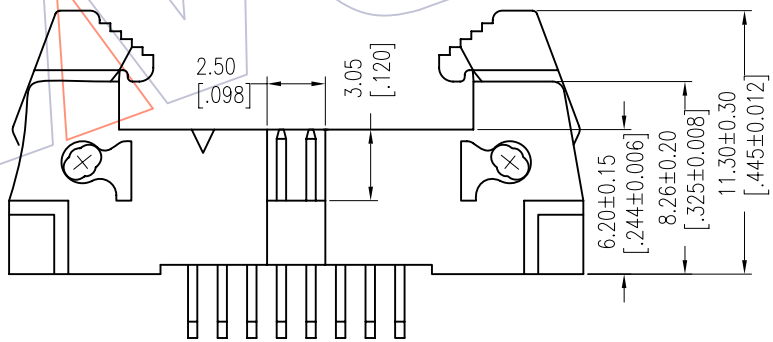

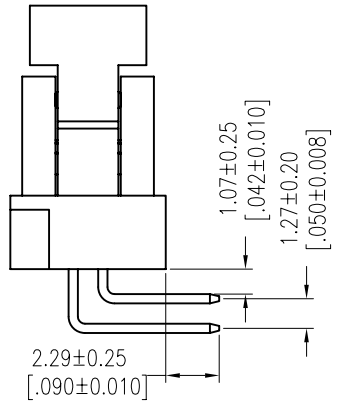

Item	Pitch	Mating
Standard	1.27	5232
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2012/12/24	MODIFY THE NOTES:Phosphor Bronze→Brass	------
A0	2012/09/28	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	JYHuang	2012/12/24
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.
3231-XXRXXBST1

TITLE:
1.27 Ejector Header "S" Type 90°

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com

WCON