

HSF

NOTES:

Current Rating: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -55°C to +105°C






Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0
 Shell: Steel, Sn Or Ni Plated
 Nut: Brass, Sn over Ni Plated

Ordering Information

6210-XX M X XX B 01

No. of Pins	Type	Contact Plating	Insulator Color
15,26,44,62P	B=With Back Nut F=With Front Nut N=Without Fork Without Nut	S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin	B:Black U:Blue W:White

PINS	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"
15	30.81	24.99	16.92	19.10	15.81
26	39.14	33.32	25.25	27.75	24.90
44	53.04	47.04	38.96	41.30	38.20
62	69.32	63.50	55.42	57.40	54.30

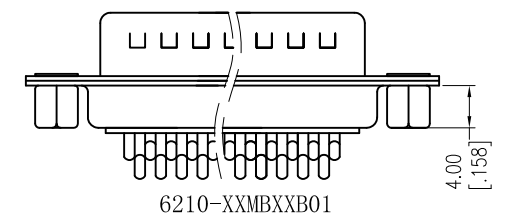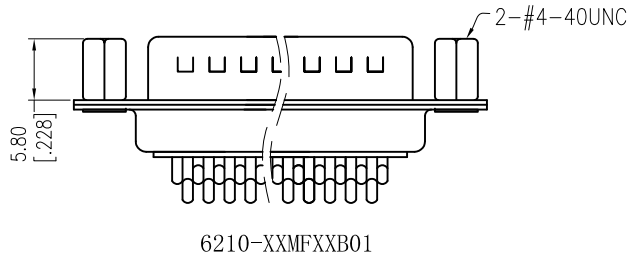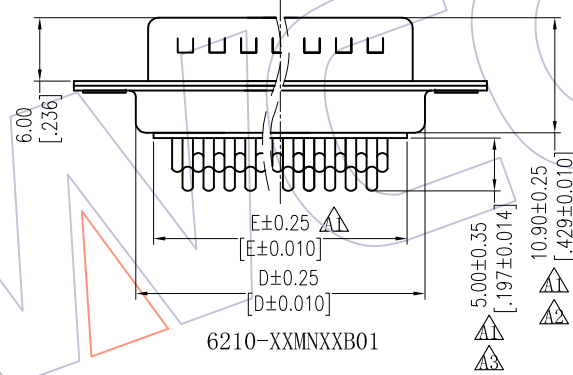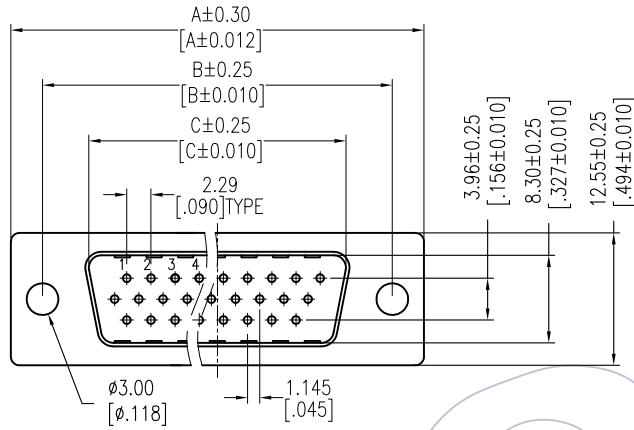

A5	2016/10/25	7.40±0.25 → 7.00±0.25	△3	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A4	2015/06/12	Modify The Contact Material	△4	x.X ±0.40	DingWenMin	2016/10/25	UNIT	mm	6210-XXMXXB01
A3	2014/06/18	Modify The DIM 4.35 to 5.00	△3	x.XX ±0.25	CHECK	DATE	SIZE	A4	
A0	2012/12/03	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	TITLE:
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3'			PROJ.	⊕	HD-SUB MALE THREE ROW SOLDER TYPE
				DIM TOL					Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--